



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Receptacle**

Connector System: **Board-to-Board**

Number of Positions: **26**

Centerline (Pitch): **5 mm [.196 in]**

Features

Product Type Features

Rectangular Power Connector Type	Header
Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions by Circuit Application	4P/Power, 2LP/Lower Power, 20/Signal
Number of Positions	26
PCB Mount Orientation	Right Angle
Number of Power Positions	6
Number of Signal Positions	20
Number of Rows	5

Electrical Characteristics

Operating Voltage	60 VDC
-------------------	--------



Contact Features

PCB Contact Termination Area Plating Material Finish	Matte
Contact Current Rating (Max)	93 A
Contact Retention Within Housing	Without
Contact Type	Receptacle
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Noble Metal
Contact Mating Area Plating Material Thickness	.076 µm[3 µin]

Termination Features

Termination Post & Tail Length	3.2 mm
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

Housing Features

Centerline (Pitch)	5 mm[.196 in]
Housing Color	Black
Housing Material	High Temperature Thermoplastic

Dimensions

Row-to-Row Spacing	2 mm[.079 in]
--------------------	---------------

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards


UL Flammability Rating	UL 94V-0
Glow Wire Rating	High Temperature Part - Not Glow Wire

Packaging Features

Packaging Method	Box & Tray
------------------	------------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>





EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2204456-3
MB HD R/A PLUG 2P+2LP+2P+20S
SOLDER



TE Part # 1-2215067-7
ASSY, EXTRACTION TOOL, 1 X 4

Also in the Series | MULTI-BEAM HD




Rectangular Power Connectors(46)

Customers Also Bought



TE Part #5787082-9
100 50SR R/A RCP ASSY,RDSN L/F

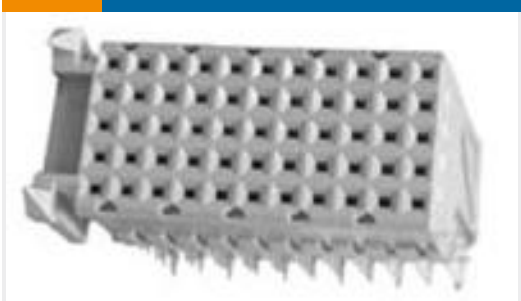

TE Part #5100161-1
Z-PACK/C RAF 55P



TE Part #1734595-5
1.0 WTB SR VT HDR 5 POS



TE Part #2204441-1
MULTI-BEAM HD R/A PLUG
15S+2P+2LP+2P+15



TE Part #5787617-3
RECP ASSY, R/A, STACKED, THRU-HOLE, USB,




TE Part #6469083-1
HMZD 3PAIR, HDR ASSY, 25MM MOD



TE Part #1-178313-3
DYNAMIC D3100 HDR V 3P ASSY



TE Part #5787441-1
HDR ASY,RA,NO KEY,STR TAIL

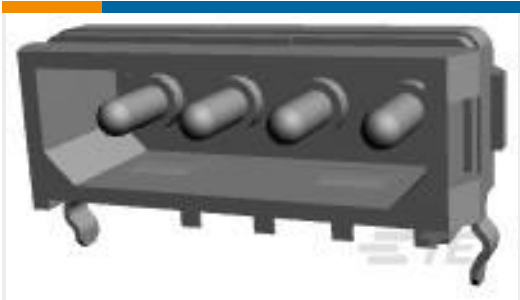

TE Part #174552-1
4P C-MNL PIN HDR R/A

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2204416-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2204416-3_A.3d_igs.zip



English

Customer View Model

[ENG_CVM_CVM_2204416-3_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[Product Compliance](#)

English

[Product Compliance](#)

English

Agency Approvals

[UL](#)

English