

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0022041061](#)
Status: **Active**
Overview: [Mini-Latch Wire-to-Board / Wire-to-Wire Connector System](#)
Description: Mini-Latch / KK Wire-to-Board Header, Vertical, with Friction Ramp, 6 Circuits, Tin (Sn) Plating, Natural

Documents:

3D Model	Product Specification PS-5045-002 (PDF)
3D Model (PDF)	Product Specification PS-5051-005-001 (PDF)
Drawing (PDF)	Application Specification 511910000-AS-000 (PDF)
Product Specification 50510002-PS-000 (PDF)	Application Specification 511910000-AS-001 (PDF)
Product Specification 511910000-PS-000 (PDF)	Packaging Specification SPK-5045-001-001 (PDF)
Product Specification PS-5045-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


UL E29179

General

Product Family PCB Headers
 Series [5045](#)
 Application Signal, Wire-to-Board
 Overview [Mini-Latch Wire-to-Board / Wire-to-Wire Connector System](#)
 Product Name KK, Mini-Latch
 UPC 800753591233

Physical

Breakaway No
 Circuits (Loaded) 6
 Circuits (maximum) 6
 Color - Resin Natural
 Durability (mating cycles max) 30
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Capable No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part Yes
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Material - Resin Polyamide
 Net Weight 609.000/mg
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 3.40mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 2.50mm
 Pitch - Termination Interface 2.50mm
 Plating min - Mating 5.080µm
 Plating min - Termination 5.080µm
 Polarized to PCB No
 Shrouded Partial
 Stackable No

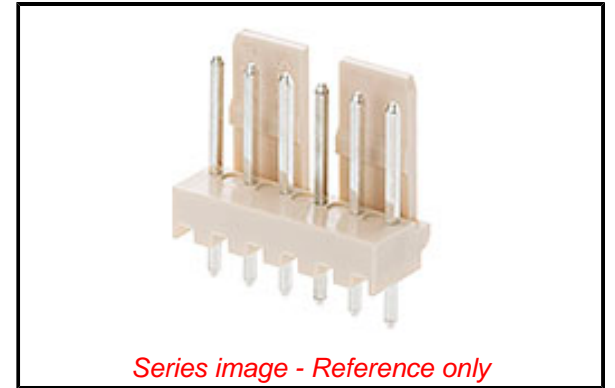

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 D(2020)4578-DC (25
 June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[5045 Series](#)

Mates With

2.50mm Pitch Housings [51191](#) , [5051](#)

Surface Mount Compatible (SMC) No
Temperature Range - Operating -40° to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 3.0A
Voltage - Maximum 250V

Material Info

Engineering Number 5045-06A

Reference - Drawing Numbers

Application Specification 511910000-AS-000, 511910000-AS-001
Packaging Specification SPK-5045-001-001
Product Specification 50510002-PS-000, 511910000-PS-000, PS-5045-001,
PS-5045-002, PS-5051-005-001
Sales Drawing SD-5045-NA-001

This document was generated on 07/14/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION