



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Receptacle**

Connector System: **Cable-to-Board**

Number of Positions: **4**

Centerline (Pitch): **3 mm [.118 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Mating & Unmating Configuration	Normal
Number of Positions	4
Number of Power Positions	4
Number of Signal Positions	0
Number of Rows	2

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Contact Features

Contact Current Rating (Max)	12 A
------------------------------	------



Contact Type	Receptacle
Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.5 µm[100 µin]

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Centerline (Pitch)	3 mm[.118 in]
Housing Color	Black
Housing Material	Nylon 66

Dimensions

Row-to-Row Spacing	3 mm[.118 in]
--------------------	---------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Bag & Box
------------------	-----------

Other

Wire Color	Black
------------	-------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed







Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability




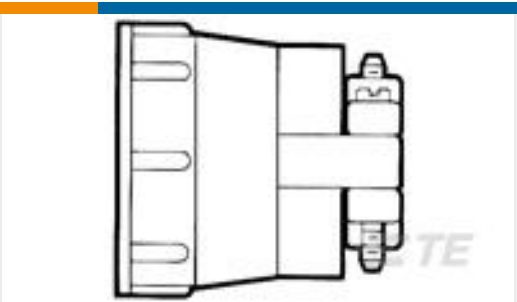


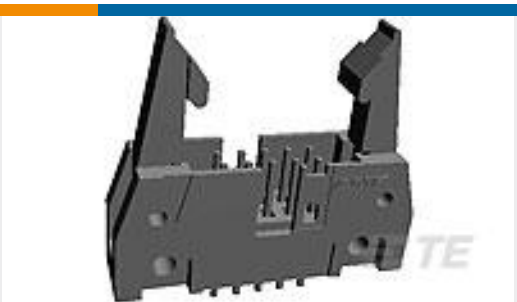
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 1-2204801-8 ELCON MICRO,HEADER,VERTICAL DIP,4P</p>	 <p>TE Part # 1-2204805-8 ELCON MICRO,HDR,VERTICAL DIP W /CAP,4P</p>	 <p>TE Part # 1-2204805-5 ELCON MICRO,HEADER,VERTICAL DIP W/CAP,4P</p>	 <p>TE Part # 2204749-8 ELCON MICRO,REC, CONTACT, TIN, 16-20AWG</p>
---	--	---	--

Customers Also Bought

 <p>TE Part #211772-1 CPC PLUG ASSEMBLY SIZE 23-19</p>	 <p>TE Part #499252-8 Bus Connector: Strain Relief, ATA</p>	 <p>TE Part #66602-2 III+ PIN,18-14,30AU/FL,LP</p>	 <p>TE Part #207774-3 CLAMP CABLE SHELL,SIZE 23</p>
 <p>TE Part #59803-1 MAINTENANCE TOOL</p>	 <p>TE Part #1658621-3 16 NOVO MIL/CTR 15DP,LEAD FREE</p>	 <p>TE Part #6469028-1 HM-ZD 2PR RECP 40P</p>	 <p>TE Part #5499206-3 A/L UNIV HDR 16P VERT LG LAT</p>



Documents

Product Drawings

ELCON MICRO,RECEPTACLE HOUSING,4P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2204748-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2204748-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2204748-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1-1773956-3-ELCON-Micro-CN

ELCON Micro Power Connectors (EN)

English

Product Specifications

Application Specification

English