

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0022051042](#)  
**Status:** **Active**  
**Overview:** [Mini-Latch Wire-to-Board / Wire-to-Wire Connector System](#)  
**Description:** Mini-Latch / KK Wire-to-Board Header, Right-Angle, with Friction Ramp, 4 Circuits, Tin (Sn) Plating, Natural

**Documents:**

[3D Model](#) [3D Model \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**


UL E29179

**General**

Product Family PCB Headers  
 Series [5046](#)  
 Application Signal, Wire-to-Board  
 Overview [Mini-Latch Wire-to-Board / Wire-to-Wire Connector System](#)  
 Product Name KK, Mini-Latch  
 UPC 800753591448

**Physical**

Breakaway No  
 Circuits (Loaded) 4  
 Circuits (maximum) 4  
 Color - Resin Natural  
 Durability (mating cycles max) 30  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Capable No  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part Yes  
 Material - Metal Brass  
 Material - Plating Mating Tin  
 Material - Plating Termination Tin  
 Material - Resin Nylon  
 Net Weight 498.400/mg  
 Number of Rows 1  
 Orientation Right Angle  
 PC Tail Length 3.40mm  
 PCB Locator No  
 PCB Retention None  
 PCB Thickness - Recommended 1.60mm  
 Packaging Type Bag  
 Pitch - Mating Interface 2.50mm  
 Pitch - Termination Interface 2.50mm  
 Plating min - Mating 5.080µm  
 Plating min - Termination 5.080µm  
 Polarized to PCB No  
 Shrouded Partial  
 Stackable No  
 Surface Mount Compatible (SMC) No  
 Temperature Range - Operating -40° to +105°C  
 Termination Interface: Style Through Hole

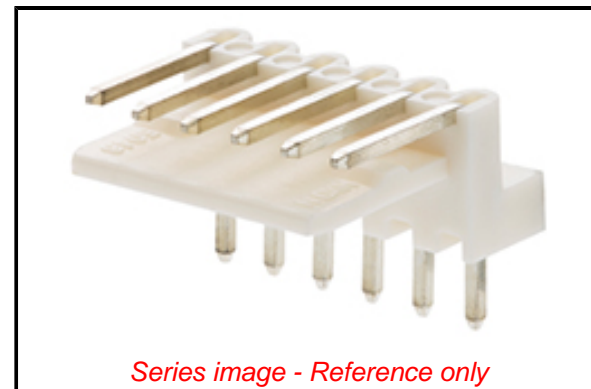

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
 D(2020)4578-DC (25  
 June 2020)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[5046 Series](#)

**Mates With**

[2.50mm Pitch Housing 51191](#)

**Electrical**

Current - Maximum per Contact

3.0A

Voltage - Maximum

250V

**Material Info**

Engineering Number

5046-04A

This document was generated on 07/15/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**