
284423-3 - ACTIVE

AMP | MQS

TE Internal #: 284423-3 Housing for Female Terminals, Wire-to-Wire, 32 Position, .1 in [2.54 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), MQS View on TE.com >

Connectors > Automotive Connectors > Connector Housings > MQS, CONNECTOR HOUSING

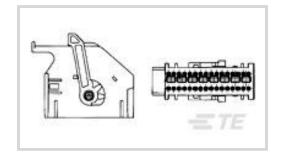

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: .64 mm [.025 in]

Connector System: Wire-to-Wire

Number of Positions: 32

Centerline (Pitch): 2.54 mm [.1 in]

All MQS, CONNECTOR HOUSING (557)

Features

Product Type Features

Connector & Housing Shape

Connector & Housing Type

 Rectangular

Housing for Female Terminals



| Connector System | Wire-to-Wire |
|------------------------------|-----------------|
| Sealable | No |
| Hybrid Connector | No |
| Primary Locking Feature | On the Terminal |
| Configuration Features | |
| Number of Positions | 32 |
| Number of Rows | 2 |
| Electrical Characteristics | |
| Operating Voltage | 24 VDC |
| Nominal Voltage Architecture | 12 V, 24 V |
| Body Features | |
| Cable Exit Angle | 90° |
| Body Material | PAGF |
| Primary Product Color | Gray |
| Contact Features | |
| | |

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 32 Position, .1 in [2.54 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), MQS



| Contact Size | .63mm | |
|-----------------------------|----------------------------|--|
| Contact Type | Receptacle | |
| Mating Tab Width | .64 mm[.025 in] | |
| Mechanical Attachment | | |
| Mounting Feature | Without | |
| Terminal Position Assurance | No | |
| Strain Relief | Without | |
| Mating Alignment Type | Polarized | |
| Mating Alignment | With | |
| Connector Mounting Type | Cable Mount (Free-Hanging) | |
| Housing Features | | |
| Centerline (Pitch) | 2.54 mm[.1 in] | |
| Dimensions | | |
| Product Width | 17.6 mm[.693 in] | |
| Product Length | 48.3 mm[1.902 in] | |
| Product Height | 39.9 mm[1.571 in] | |
| Row-to-Row Spacing | 5 mm[.197 in] | |

Usage Conditions

| Operating Temperature (Max) | 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F] | |
|---|--|--|
| Operating Temperature Range | -30 – 105 °C[-22 – 221 °F] | |
| Operation/Application | | |
| Circuit Application | Signal | |
| Packaging Features | | |
| Packaging Method | Box | |
| Other | | |
| Serviceable | No | |
| Connector Position Assurance Capable | No | |
| Product Compliance For compliance documentation, visit the product page on TE.com> | | |
| EU RoHS Directive 2011/65/EU | Compliant | |

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 32 Position, .1 in [2.54 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), MQS



| EU ELV Directive 2000/53/EC | Compliant | |
|---|---|--|
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold | |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC | |
| Halogen Content | BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources. | |
| Solder Process Capability | Not applicable for solder process capability | |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts




Also in the Series MQS

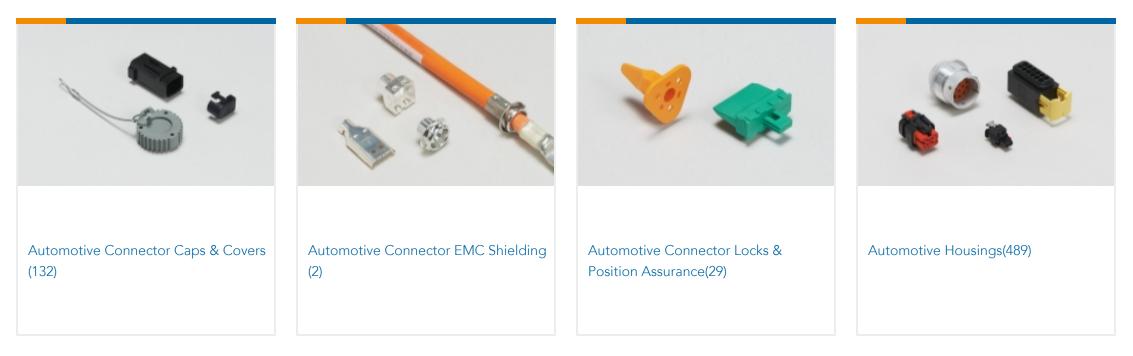

Housing for Female Terminals, Wire-to-Wire, 32 Position, .1 in [2.54 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), MQS



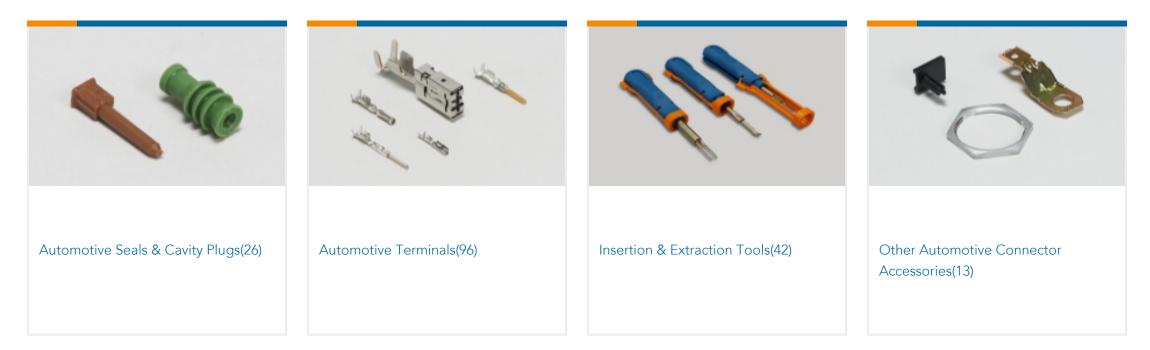



PCB Headers & Receptacles(207)

Customers Also Bought



| MULTILOCK, CONNECTOR HOUSING | 060 TAB(M) CONT | 025/060/110 HYB 25P PLUG ASSY | 24 POS.KIT ASSY FOR AIR BAG (B |
|--|--|--|---|
| | | | |
| TE Part #A88297-000 ES-CAP-HW-NO.1-X-35MM | TE Part #1897502-1 REAR DTB 040/090 18P PLUG ASSY | TE Part #1-2355507-1 3POS,MCON 1.2,REC HSG ASSY,SLD, COD A | TE Part #2005281-3 MT3/JPT/SPT HYB 58P PLUG ASSY |

TE Part #2109517-1 025/060/110 HYB 25P CAP ASSY

Documents

Housing for Female Terminals, Wire-to-Wire, 32 Position, .1 in [2.54 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), MQS



Product Drawings 32 POS. AIR BAG KIT ASS'Y

English

CAD Files

Customer View Model

ENG_CVM_284423-3_A4.3d_igs.zip

English

Customer View Model

ENG_CVM_284423-3_A4.3d_stp.zip

English

Customer View Model

ENG_CVM_284423-3_A4.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Micro Quadlok Interconnection System (MQS)

English

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (non U.S.)

English