


## 280001-7 Product Details

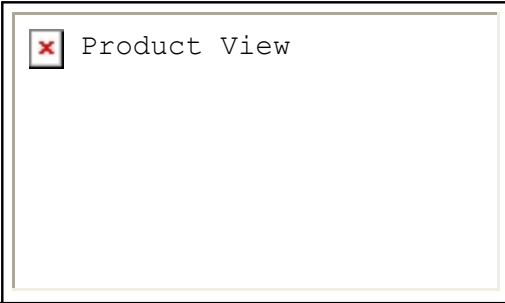

### FASTON Uninsulated Receptacles & Housings

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Receptacle
- Tab Fit = 6.35 x 0.81 mm
- Board Mount = No
- Receptacle Style = Straight
- Insulation Support

[View all Features](#)

**Quick Links**

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

**280001-7**

TE Internal Number: 280001-7



**Superseded**

[Search for Replacement Parts](#)

### Documentation & Additional Information

<p><b>Product Drawings:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">FASTON Conn. .250 sr. rec. ctc.</a> (PDF, Italian)</li> </ul> <p><b>Catalog Pages/Data Sheets:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Automachine and General Products</a> (PDF, English)</li> </ul> <p><b>Product Specifications:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">FASTON conn. terminal, rec. ctc. 2,8-4,8-6,0-6,3-9,6 mm.</a> (PDF, Italian)</li> </ul> <p><b>Application Specifications:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">FASTON CONN. .250 SR. REC CTC &amp; LIF REC CTC</a> (PDF, English)</li> </ul> <p><b>Instruction Sheets:</b></p> <ul style="list-style-type: none"> <li>• None Available</li> </ul> <p><b>CAD Files:</b></p> <ul style="list-style-type: none"> <li>• None Available</li> </ul>	<p><b>Additional Information:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Product Line Information</a></li> </ul> <p><b>Related Products:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Tooling</a></li> </ul>
---	--

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

<p><b>Product Type Features:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Product Type</a> = Receptacle</li> <li>• <a href="#">Tab Fit (mm [in])</a> = 6.35 x 0.81 [.250 x .032]</li> <li>• <a href="#">Receptacle Style</a> = Straight</li> <li>• <a href="#">Insulation Support</a> = Insulation Support</li> <li>• <a href="#">Wire/Cable Type</a> = Stranded</li> <li>• <a href="#">Insulation Diameter (mm [in])</a> = 3.00-4.29 [.118-.169]</li> <li>• <a href="#">Insertion Force</a> = Normal</li> <li>• <a href="#">Material</a> = Bronze</li> <li>• <a href="#">Finish</a> = Tin</li> <li>• <a href="#">Crimp Type</a> = F-Crimp</li> <li>• CSA Certified = Yes</li> </ul> <p><b>Mechanical Attachment:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Board Mount</a> = No</li> </ul>	<p><b>Body Related Features:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Weld Tab</a> = Without</li> <li>• <a href="#">Wire Range (mm [AWG])</a> = 1.00-2.50<sup>2</sup> [17-13.5]</li> <li>• UL Rating = Listed</li> </ul> <p><b>Industry Standards:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">RoHS/ELV Compliance</a> = RoHS compliant, ELV compliant</li> <li>• <a href="#">Lead Free Solder Processes</a> = Not relevant for lead free process</li> <li>• RoHS/ELV Compliance History = Always was RoHS compliant</li> </ul> <p><b>Packaging Related Features:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Packaging Method</a> = Strip</li> </ul> <p><b>Other:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">For Hermetic Header Tab</a> = Yes</li> <li>• <a href="#">Line</a> = Premier</li> <li>• Brand = AMP</li> </ul>
--	---