
292207-7 ~ ACTIVE

AMP Mini CT

TE Internal #: 292207-7 PCB Mount Header, Vertical, Wire-to-Board, 7 Position, .059 in [1.5 mm] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, AMP Mini CT

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

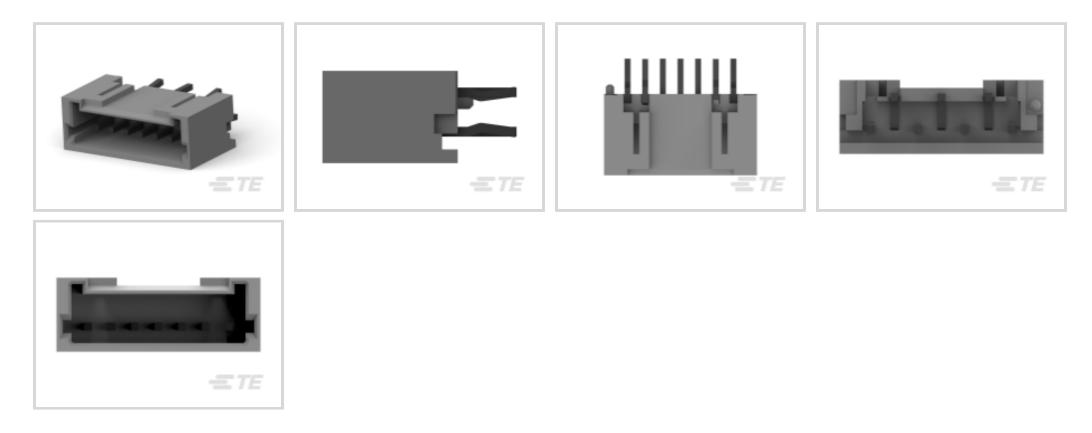

Connector System: Wire-to-Board

Number of Positions: 7

Number of Rows: 1

Centerline (Pitch): 1.5 mm [.059 in]

PCB Mount Orientation: Vertical

Features

Connectivity

Product Type Features

Connector System	Wire-to-Board	
Header Type	Fully Shrouded	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
PCB Connector Assembly Type	PCB Mount Header	
Configuration Features		
Number of Positions	7	
Number of Rows	1	
PCB Mount Orientation	Vertical	
Electrical Characteristics		
Operating Voltage	50 VAC	
Body Features		
Primary Product Color	Natural	

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, .059 in [1.5 mm] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, AMP Mini CT



Contact Features

Contact Layout	Staggered	
Contact Mating Area Length	2.4 mm[.095 in]	
Mating Square Post Dimension	.5 mm[.02 in]	
PCB Contact Termination Area Plating Material Thickness	1 – 2 μm[39.37 – 78.73 μin]	
Contact Mating Area Plating Material Thickness	1 μm[39.37 μin]	
Contact Shape & Form	Square	
Contact Mating Area Plating Material Finish	Matte	
PCB Contact Termination Area Plating Material	Tin	
Contact Base Material	Brass	
Contact Mating Area Plating Material	Tin	
Contact Type	Pin	
Contact Current Rating (Max)	2 A	

Termination Features

Square Termination Post & Tail Dimension	.5 mm[.02 in]
Termination Post & Tail Length	3 mm[.118 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	With
Panel Mount Feature	With
PCB Mount Retention Type	Kinked Legs
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With
Housing Features	
Housing Material	Nylon(G.F)
Centerline (Pitch)	1.5 mm[.059 in]
Dimensions	
Connector Length	13 mm[.511 in]
Connector Height	8.4 mm[.33 in]

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, .059 in [1.5 mm] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, AMP Mini CT



Connector Width	4.7 mm[.185 in]	
PCB Thickness (Recommended)	1.6 mm[.063 in]	
Usage Conditions		
Operating Temperature Range	-22 – 221 °C[-30 – 105 °F]	
Operation/Application		
Assembly Process Feature	Pick and Place Cover	
Circuit Application	Signal	
Industry Standards		
Agency/Standard	CSA, UL	
	,	
Approved Standards	CSA LR7189, UL E28476	
Approved Standards UL Flammability Rating		
	CSA LR7189, UL E28476	
UL Flammability Rating	CSA LR7189, UL E28476	
UL Flammability Rating Packaging Features	CSA LR7189, UL E28476 UL 94V-0	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent to these limits as defined in the Annexes of Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, .059 in [1.5 mm] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, AMP Mini CT



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



-ETE

TE Part # CAT-AM7053-H8172 Mini Common Termination (CT) Housings



TE Part # CAT-AM7053-C7671 MINI COMMON TERMINATION CONTACTS



TE Part # 353293-7 MINI CT MT REC ASSY 7P GRAY



TE Part # 2-179694-7 CT MT REC ASSY 7P GRAY



TE Part # 5-353293-7 MINI CT MT REC ASSY 7P BLUE

Also in the Series | AMP Mini CT

			And And And
PCB Connector Mounting(10)	PCB Headers & Receptacles(332)	Wire-to-Board Connector Assemblies & Housings(172)	Wire-to-Board Connector Contacts(4)

Customers Also Bought



PCB Mount Header, Vertical, Wire-to-Board, 7 Position, .059 in [1.5 mm] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, AMP Mini CT







Documents

Product Drawings MINI CT SGL DIP V 7P NAT

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_292207-7_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_292207-7_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_292207-7_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 6-1773454-5_AMP_Mini_CT_Connector_Series_QRG

English

Product Specifications

Application Specification

English

Product Environmental Compliance MD_292207-7_11082017340_dmtec

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, .059 in [1.5 mm] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, AMP Mini CT



English

MD_292207-7_11082017340_dmtec

English

Agency Approvals

UL

English