
**292253-9** • ACTIVE

## AMP CT

TE Internal #: 292253-9 PCB Mount Header, Right Angle, Wire-to-Board, 9 Position, .079 in [2 mm] Centerline, Partially Shrouded, Tin, Through Hole - Solder, AMP CT

#### View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > CT 2mm Header Assembly: Right Angle

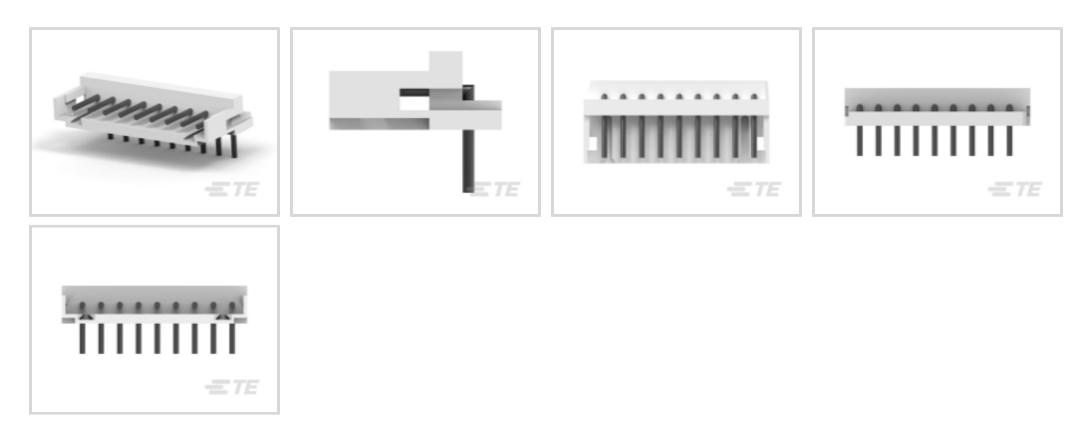

Connector System: Wire-to-Board

Number of Positions: 9

Number of Rows: 1

Centerline (Pitch): 2 mm [.079 in ]

PCB Mount Orientation: Right Angle

#### All CT 2mm Header Assembly: Right Angle (176)



# Features

## **Product Type Features**

Connector System	Wire-to-Board			
Header Type	Partially Shrouded			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
PCB Connector Assembly Type	PCB Mount Header			
Configuration Features				
Number of Positions	9			
Number of Rows	1			
PCB Mount Orientation	Right Angle			
Electrical Characteristics				
Operating Voltage	125 VAC			
Body Features				

PCB Mount Header, Right Angle, Wire-to-Board, 9 Position, .079 in [2 mm] Centerline, Partially Shrouded, Tin, Through Hole - Solder, AMP CT



Primary Product Color	Natural				
Contact Features					
Contact Layout	Inline				
Contact Mating Area Length	4.5 mm[.177 in]				
PCB Contact Termination Area Plating Material Thickness	1 μm[39.37 μin]				
Mating Pin Diameter	.6 mm[.024 in]				
Contact Mating Area Plating Material Thickness	1 μm[39.37 μin]				
Contact Shape & Form	Round				
Contact Mating Area Plating Material Finish	Matte				
PCB Contact Termination Area Plating Material	Tin				
Contact Base Material	Brass				
Contact Mating Area Plating Material	Tin				
Contact Type	Pin				
Contact Current Rating (Max)	4 A				
Termination Features					
Round Termination Post & Tail Diameter	.6 mm[.024 in]				
Termination Post & Tail Length	3.2 mm[.126 in]				
Termination Method to Printed Circuit Board	Through Hole - Solder				
Mechanical Attachment					
Mating Alignment Type	Polarization				
Mating Retention	Without				
PCB Mount Retention Type	Kinked Legs				
Mating Retention Type	Detent Window				
Connector Mounting Type	Board Mount				
Mating Alignment	With				
PCB Mount Alignment	Without				
PCB Mount Retention	With				
Housing Features					
Housing Material	Nylon 6/6				
Centerline (Pitch)	2 mm[.079 in]				
Dimensions					
Connector Length	19.8 mm[.78 in]				

PCB Mount Header, Right Angle, Wire-to-Board, 9 Position, .079 in [2 mm] Centerline, Partially Shrouded, Tin, Through Hole - Solder, AMP CT



Connector Height	8.8 mm[.346 in]
Connector Width	4 mm[.157 in]
PCB Thickness (Recommended)	.8 mm[.031 – .063 in]
Usage Conditions	
Operating Temperature Range	-40 - 221 °C[-40 - 105 °F]
Operation/Application	
Assembly Process Feature	Pick and Place Cover
Circuit Application	Power & Signal
Industry Standards	
Agency/Standard	CSA, UL
Approved Standards	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	500
Packaging Type	Bag, Box

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

PCB Mount Header, Right Angle, Wire-to-Board, 9 Position, .079 in [2 mm] Centerline, Partially Shrouded, Tin, Through Hole - Solder, AMP CT



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**



# Also in the Series AMP CT



		& Housings(257)		

# Customers Also Bought



PCB Mount Header, Right Angle, Wire-to-Board, 9 Position, .079 in [2 mm] Centerline, Partially Shrouded, Tin, Through Hole - Solder, AMP CT



# Documents

**Product Drawings** CT CONN MT HDR ASSY H 9P NAT

English

**CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_292253-9\_B1.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_292253-9\_B1.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_292253-9\_B1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages 2.0MM\_AMP\_CT\_CONNECTOR\_SERIES\_QUICK\_REF\_GUIDE

English

**Product Specifications** 

Product Specification

English

#### AMP COMMON TERMINATION (CT), CONNECTOR, 2mm PITCH, M/T TYPE, LEAD FREE VERSION

Japanese

**Product Specification** 

Japanese

**Product Environmental Compliance** MD\_292253-9\_04012011815

English

MD\_292253-9\_04012011815

English