

34142 ✓ ACTIVE

PLASTI-GRIP

TE Internal #: 34142

Ring Terminals & Spade Terminals, Ring Tongue, 22 AWG Wire Size, .3 – 1.42 mm<sup>2</sup> Wire Size, 509 – 3260 CMA Wire Size, Stud Size #6 / M3.5, PLASTI-GRIP

[View on TE.com >](#)



Terminals & Splices > Ring Terminals & Spade Terminals



Ring & Spade Terminal Type: **Ring Tongue**

Wire Size: **509 – 3260 CMA**

Stud Size: **#6, M3.5**

### Features

#### Product Type Features

|  |                    |
|--|--------------------|
| Shape Description                      | RING-043           |
| Stud Size                              | #6, M3.5           |
| Sealable                               | No                 |
| Wire Insulation Support Retention Type | Insulation Support |

#### Configuration Features

|                 |       |
|-----------------|-------|
| Number of Holes | 1     |
| Terminal Angle  | 180 ° |

#### Electrical Characteristics

|               |       |
|---------------|-------|
| Voltage (Max) | 600 V |
|---------------|-------|

#### Body Features

|                         |     |
|-------------------------|-----|
| Inspection Slot         | No  |
| Insulation Sleeve Color | Red |
| Stripe Color            | Red |

#### Contact Features

|                            |             |
|----------------------------|-------------|
| Ring & Spade Terminal Type | Ring Tongue |
|----------------------------|-------------|



|             |        |
|-------------|--------|
| Barrel Type | Closed |
|-------------|--------|

|                      |        |
|----------------------|--------|
| Terminal Orientation | Offset |
|----------------------|--------|

|                           |     |
|---------------------------|-----|
| Terminal Plating Material | Tin |
|---------------------------|-----|

### Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

### Dimensions

|           |                |
|-----------|----------------|
| Wire Size | 509 – 3260 CMA |
|-----------|----------------|

|               |                  |
|---------------|------------------|
| Stud Diameter | 3.68 mm[.145 in] |
|---------------|------------------|

|                  |                 |
|------------------|-----------------|
| Tongue Thickness | .79 mm[.031 in] |
|------------------|-----------------|

|                        |                   |
|------------------------|-------------------|
| Overall Product Length | 17.37 mm[.684 in] |
|------------------------|-------------------|

|  |                 |
|--|-----------------|
| Accepts Wire Insulation Diameter (Max) | 3.56 mm[.14 in] |
|--|-----------------|

|  |                               |
|--|-------------------------------|
| Accepts Wire Insulation Diameter Range | 2.67 – 3.56 mm[.105 – .14 in] |
|--|-------------------------------|

### Usage Conditions

|                   |                     |
|-------------------|---------------------|
| Insulation Option | Partially Insulated |
|-------------------|---------------------|

|                             |                |
|-----------------------------|----------------|
| Operating Temperature Range | 105 °C[221 °F] |
|-----------------------------|----------------|

### Operation/Application

|                                    |        |
|------------------------------------|--------|
| Compatible With Wire Base Material | Copper |
|------------------------------------|--------|

|                                       |     |
|---------------------------------------|-----|
| Compatible With Wire Plating Material | Tin |
|---------------------------------------|-----|

|            |    |
|------------|----|
| Heavy Duty | No |
|------------|----|

### Industry Standards

|                      |    |
|----------------------|----|
| Government Qualified | No |
|----------------------|----|

### Packaging Features

|                    |      |
|--------------------|------|
| Packaging Quantity | 1000 |
|--------------------|------|

|                  |             |
|------------------|-------------|
| Packaging Method | Loose Piece |
|------------------|-------------|

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|                              |           |
|------------------------------|-----------|
| EU RoHS Directive 2011/65/EU | Compliant |
|------------------------------|-----------|

|                             |           |
|-----------------------------|-----------|
| EU ELV Directive 2000/53/EC | Compliant |
|-----------------------------|-----------|

|   |   |
|---|---|
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
|---|---|

|  |  |
|--|--|
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) |
|--|--|



Candidate List Declared Against: JAN 2022  
 (223)  
 SVHC > Threshold:  
 Not Yet Reviewed

Halogen Content Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability Not applicable for solder process capability

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts







Also in the Series | **PLASTI-GRIP**

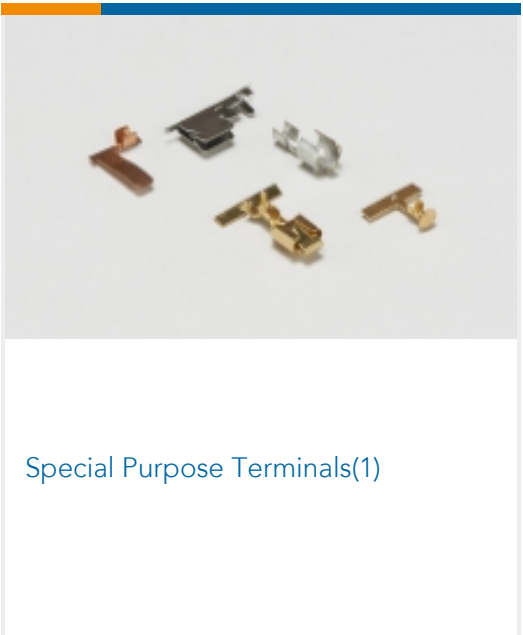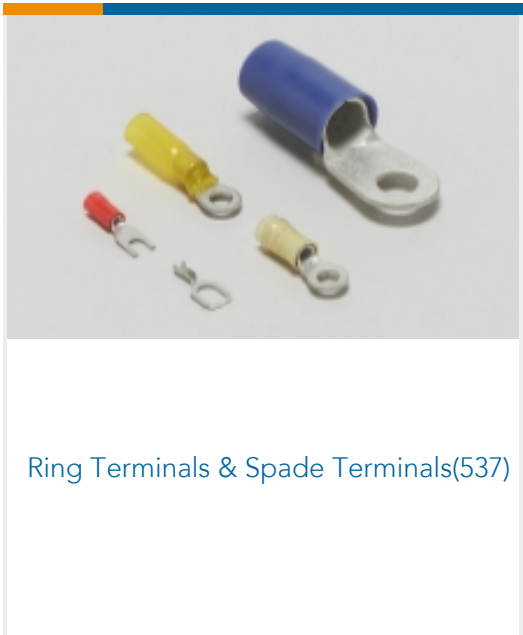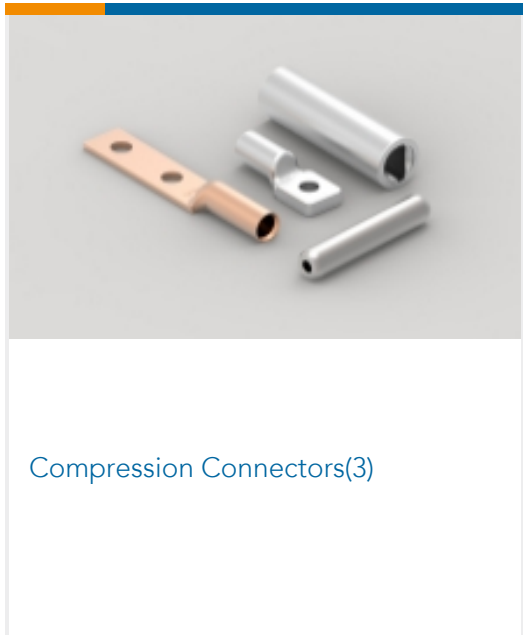

Customers Also Bought

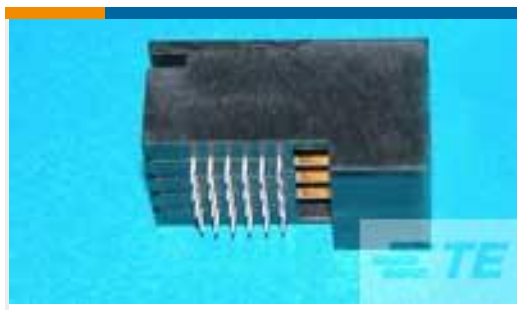

TE Part #1-1410271-1  
MULTIGIG RT PWR .8" R/A HDR 4P  
PBFR

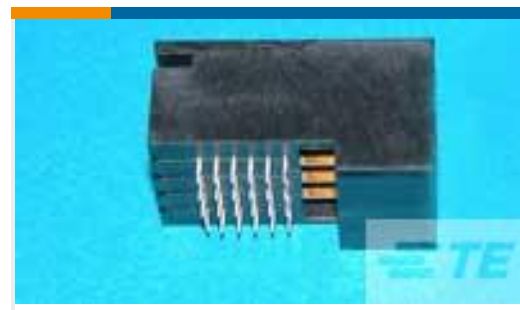

TE Part #1-1410271-8  
MULTIGIG RT PWR .8" R/A HDR 4P  
PBFR



TE Part #102398-4  
12 AMPMODU MT ASSY DR .100CL



TE Part #132365-000  
D-SCE-1K-4.8-50-9



TE Part #DTS26F21-11SN  
PLUG ASSY



TE Part #556880-1  
CONT,AMPINNRGY WTB,LS PC,10-12



TE Part #6-1879135-5  
RN 0603 5R49 0.1% 10PPM 5K RL



TE Part #1410421-1  
MULTIGIG RT T1 .8" DC SE F-STD

## Documents

### Product Drawings

[PG R 22-16 COMM 22-18 MIL 6](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_34142\\_R.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_34142\\_R.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_34142\\_R.3d\\_stp.zip](#)

English

[3D PDF](#)

English

Customer View Model

[ENG\\_CVM\\_34142\\_P.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_34142\\_P.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_34142\\_P.3d\\_stp.zip](#)

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Product Specifications

#### Application Specification

English

---

### Product Environmental Compliance

#### MD\_34142\_030520192358\_dmtec

English

#### MD\_34142\_030520192358\_dmtec

English

---

### Agency Approvals

#### UL Report

English

#### UL Report

English

#### UL Report

English