

FASTON | FASTON 187

TE Internal #: 342368-1 Quick Disconnects, Receptacle, 24 – 20 AWG Wire Size, .2 – .51 mm² Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, FASTON 187

View on TE.com >

Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: Receptacle

Wire Size: .2 – .51 mm²

Mating Tab Width: 4.75 mm [.187 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features



Wire & Cable
No
Regular Wire
Normal
No
Single
Receptacle
4.75 mm[.187 in]
.81 mm[.032 in]
Straight
Brass
Unplated
I

C For support call+1 800 522 6752

07/26/2022 03:56AM | Page 1

Quick Disconnects, Receptacle, 24 – 20 AWG Wire Size, .2 – .51 mm² Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, FASTON 187



Barrel Type	Open
Mechanical Attachment	
Mating Retention Type	Dimple
Wire Insulation Support	With
Dimensions	
Accepts Wire Insulation Diameter Range	1.02 – 1.78 mm[.04 – .07 in]
Overall Length	15 mm[.591 in]
Receptacle Terminal Stock Thickness	.3 mm[.012 in]
Wire Size	.2 – .51 mm²
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Industry Standards	
UL Rating	Listed
CSA Certified	Yes
Packaging Features	
Packaging Quantity	10000

	$1 \cdots $		ICICY
\sim		,)

Packaging Method

Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Quick Disconnects, Receptacle, 24 – 20 AWG Wire Size, .2 – .51 mm² Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, FASTON 187




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

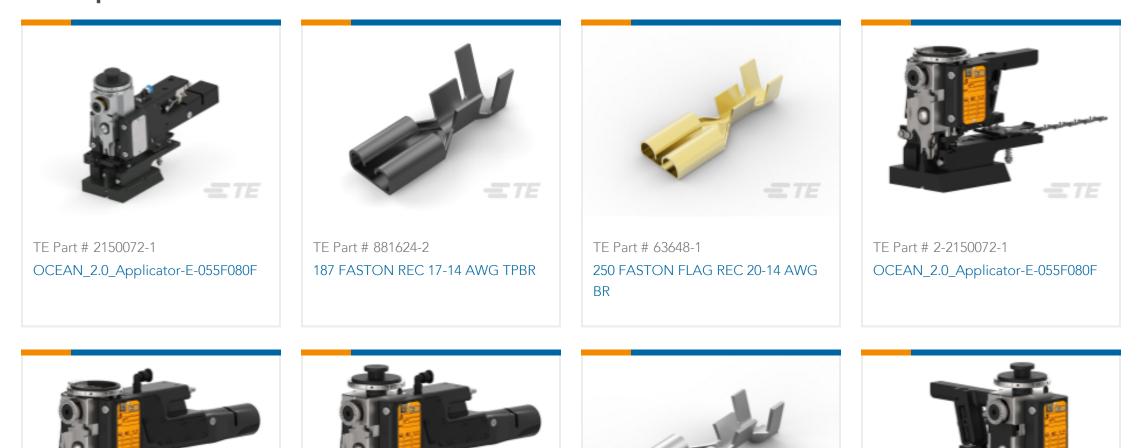




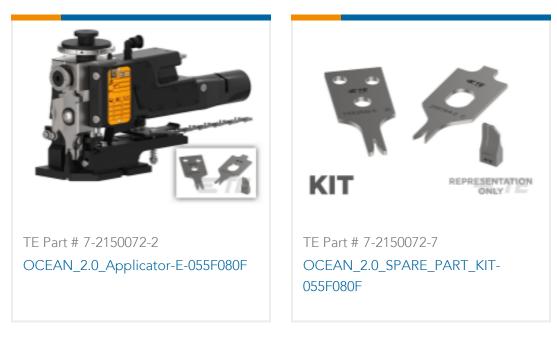


Also in the Series | FASTON 187


Quick Disconnects, Receptacle, 24 – 20 AWG Wire Size, .2 – .51 mm² Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, FASTON 187



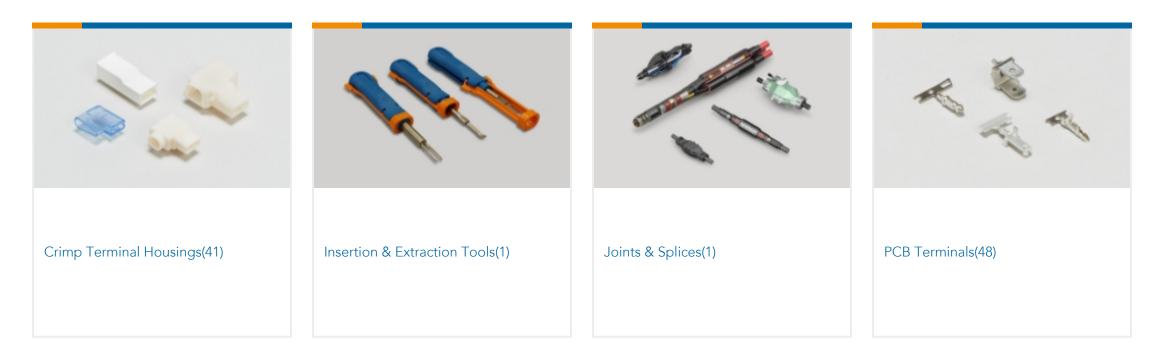

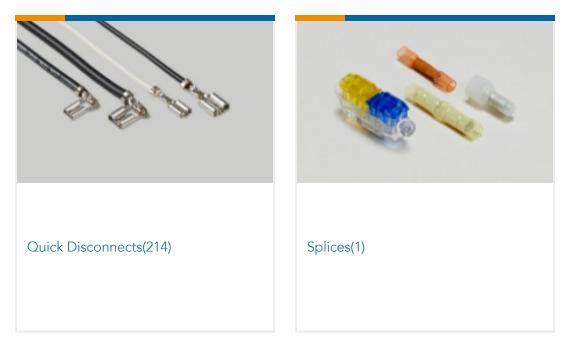

Customers Also Bought

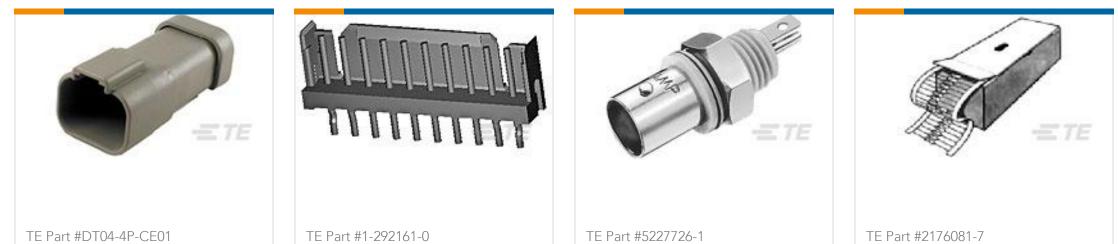

	1L1 alt #1-272101-0
REC, 4P, GRY, E, CAP	CT P/HDR ASSY V 10P W/K

KINK NAT

ISOLATED BNC SOLDER JACK ASSY

EP 1W (S) 100R 5%





Documents

S For support call+1 800 522 6752

Quick Disconnects, Receptacle, 24 – 20 AWG Wire Size, .2 – .51 mm² Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, FASTON 187



Product Drawings 187 FASTON,REC.,30-24 AWG,BR English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_342368-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_342368-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_342368-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English