




MTA 100

TE Internal #: 3-640442-4

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Retention, Insulation Displacement (IDC), Wire-to-Board, Tin, Normal, MTA 100

[View on TE.com >](#)

Connectors > Rectangular Connectors > Standard Rectangular Connectors > Nylon Tin Plated Receptacle: 2.54mm, No Mating Alignment, MTA 100

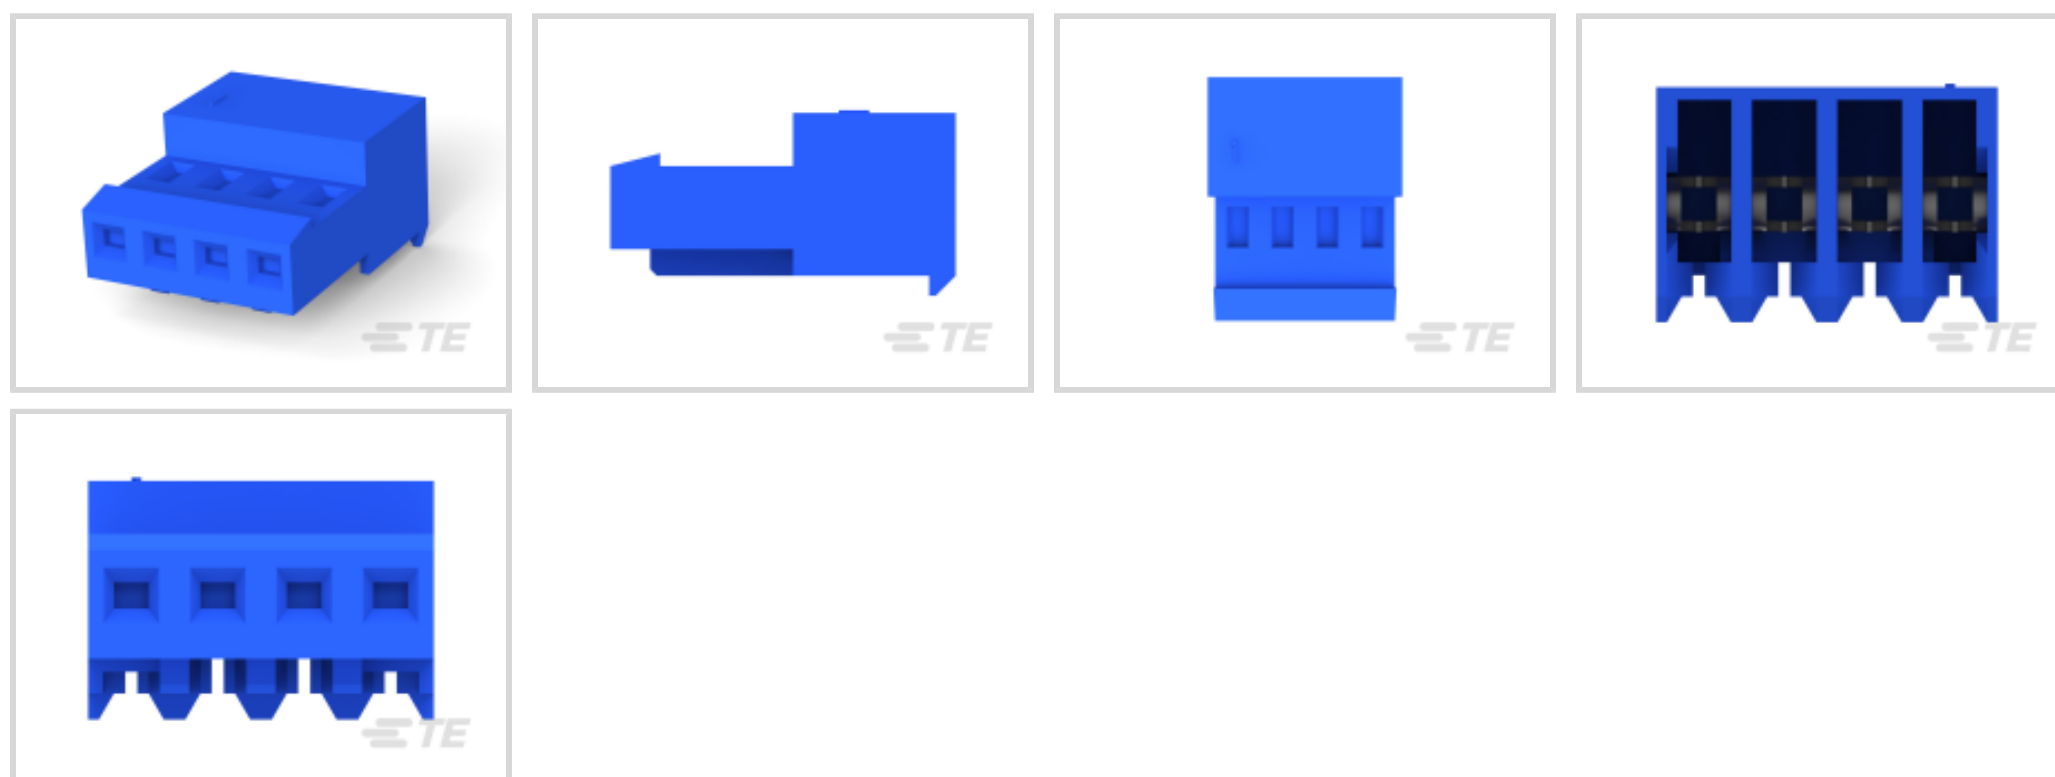

Connector Product Type: **Connector Assembly**

Connector & Housing Type: **Receptacle**

Mating Alignment: **Without**

Mating Retention: **With**

Mating Retention Type: **Locking Ramp**

[All Nylon Tin Plated Receptacle: 2.54mm, No Mating Alignment, MTA 100 \(481\)](#)

## Features

### Product Type Features

|                                   |                    |
|-----------------------------------|--------------------|
| Product Style                     | Assembly           |
| Shape                             | Rectangular        |
| Wire/Cable Type                   | Stranded           |
| Connector Type                    | Connector Assembly |
| Housing Type                      | Receptacle         |
| Connector Product Type            | Connector Assembly |
| Connector & Housing Type          | Receptacle         |
| Connector System                  | Wire-to-Board      |
| Insertion Force Type              | Normal             |
| Sealable                          | No                 |
| Connector & Contact Terminates To | Wire & Cable       |

### Configuration Features

|                    |   |
|--------------------|---|
| Number of Cavities | 4 |
|--------------------|---|



|                     |         |
|---------------------|---------|
| Number of Positions | 4       |
| Number of Rows      | 1       |
| Panel Gasket        | Without |

#### Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 250 VAC |
|-------------------|---------|

#### Contact Features

|  |         |
|--|---------|
| Contact Layout                                 | In-line |
| Contact Type                                   | Female  |
| Wire Contact Termination Area Plating Material | Tin     |
| Contact Underplating Material                  | Nickel  |
| Contact Mating Area Plating Material           | Tin     |
| Contact Retention Within Housing               | With    |
| Contact Current Rating (Max)                   | 5 A     |

#### Termination Features

|                                    |                               |
|------------------------------------|-------------------------------|
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |
|------------------------------------|-------------------------------|

#### Mechanical Attachment

|                                       |                            |
|---------------------------------------|----------------------------|
| Panel Mount                           | No                         |
| Contact Retention Type Within Housing | Locking Lance              |
| Panel Mount Feature                   | Without                    |
| Mating Alignment                      | Without                    |
| Mating Retention                      | With                       |
| Mating Retention Type                 | Locking Ramp               |
| Connector Mounting Type               | Cable Mount (Free-Hanging) |

#### Housing Features

|                    |                |
|--------------------|----------------|
| Housing Color      | Blue           |
| Housing Material   | Nylon 6/6      |
| Centerline (Pitch) | 2.54 mm[.1 in] |

#### Dimensions

|           |                           |
|-----------|---------------------------|
| Width     | 6.99 mm[.275 in]          |
| Height    | 13.21 mm[.52 in]          |
| Length    | 10.16 mm[.4 in]           |
| Wire Size | .12 – .15 mm <sup>2</sup> |



### Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

### Operation/Application

|                     |        |
|---------------------|--------|
| Shielded            | No     |
| Circuit Application | Signal |

### Industry Standards

|                        |            |
|------------------------|------------|
| CSA Rating             | Certified  |
| Agency/Standard        | CSA, UL    |
| UL Rating              | Recognized |
| CSA File Number        | LR7189     |
| UL File Number         | E28476     |
| UL Flammability Rating | UL 94V-2   |

### Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Quantity | 500     |
| Packaging Method   | Bag/Box |

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|   |  |
|---|--|
| EU RoHS Directive 2011/65/EU                  | Compliant  |
| EU ELV Directive 2000/53/EC                   | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2022 (224)<br>Candidate List Declared Against: JAN 2022 (223)<br>SVHC > Threshold:<br>Not Yet Reviewed |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free  |
| Solder Process Capability                     | Not applicable for solder process capability   |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these

limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts




TE Part # CAT-104MTA-PRUSH  
Polyester Right Angle PCB Header: 2.54mm, Unshrouded, MTA 100



TE Part # CAT-104MTA-PVSHH  
Polyester Vertical PCB Header: 2.54 mm, Shrouded, MTA 100

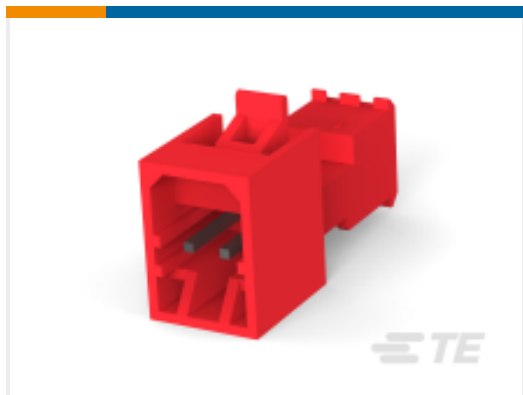

TE Part # CAT-104MTA-NTPMP  
Nylon Tin Plated Plug: 2.54mm, With Mating Alignment, MTA 100

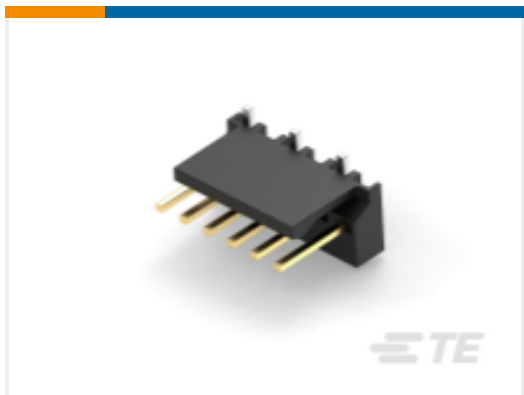

TE Part # CAT-104MTA-NVSMH  
Nylon Vertical PCB Header: 2.54mm, Surface Mount, MTA 100




TE Part # CAT-104MTA-NYLCC  
Nylon PCB Connector Covers: 2.54 mm, MTA 100



TE Part # 640454-4  
04P MTA100 HDR ASSY SQ STR POL



TE Part # CAT-104MTA-PRSMH  
Polyester Right Angle PCB Header: 2.54mm, Shrouded, With Mating Alignment

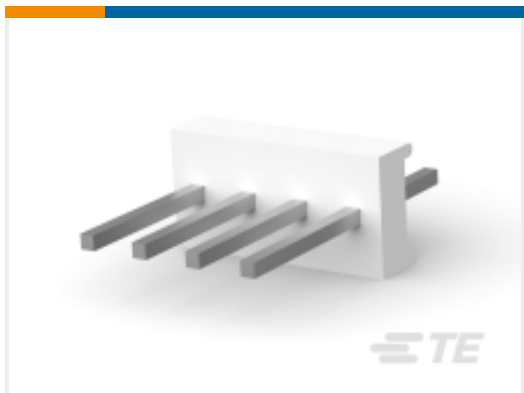


TE Part # CAT-104MTA-PVUNH  
Polyester Vertical PCB Header: 2.54 mm, Unshrouded, No Mating Alignment




TE Part # CAT-104MTA-PLSCC  
Polyester PCB Connector Covers: 2.54 mm, MTA 100



TE Part # CAT-104MTA-PRUMH  
Polyester Right Angle PCB Header: 2.54mm, Wire-to-Board, MTA 100

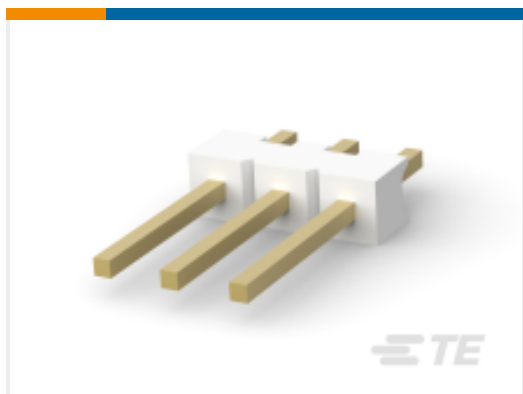


TE Part # CAT-104MTA-PVBRH  
Polyester Vertical PCB Header: 2.54 mm, Breakaway, MTA 100

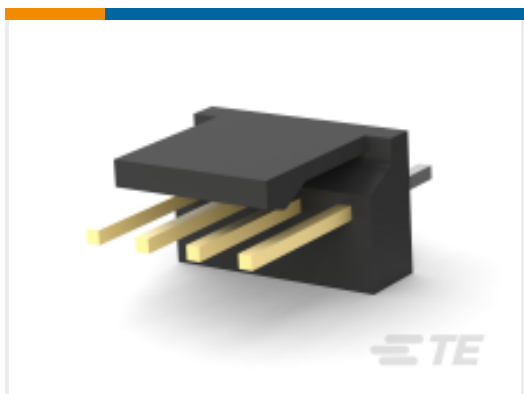

TE Part # CAT-104MTA-NVTHH  
Nylong Vertical PCB Header: 2.54mm, Through Hole, MTA 100



TE Part # 58074-1  
MTA 50/100/156 MANUAL TOOL FRAME

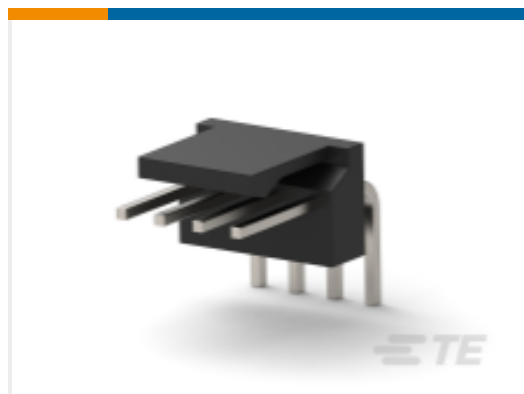

TE Part # 3-647051-4  
04P MTA100 HRD ASSYF/L HT LF







TE Part # 3-644694-4  
04P MTA100 R/A HDR RETENTIVE



TE Part # 58246-1  
MTA 100 CRIMP HEAD REPAIR DISCRETE



## Also in the Series | MTA 100

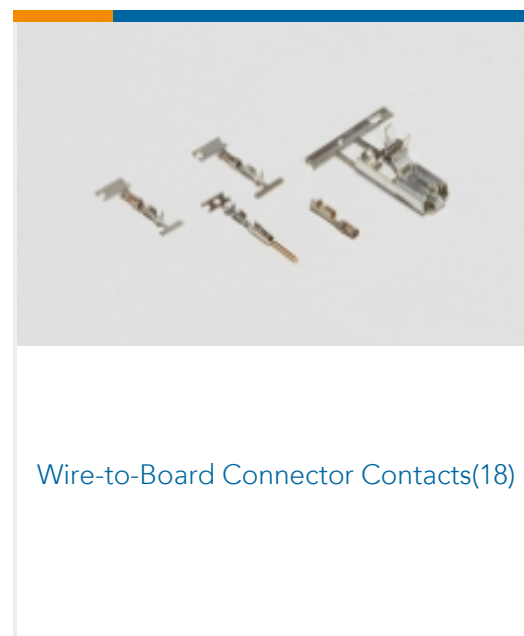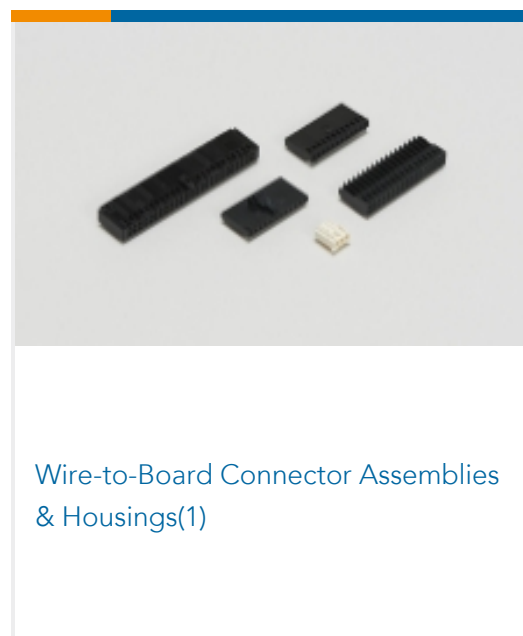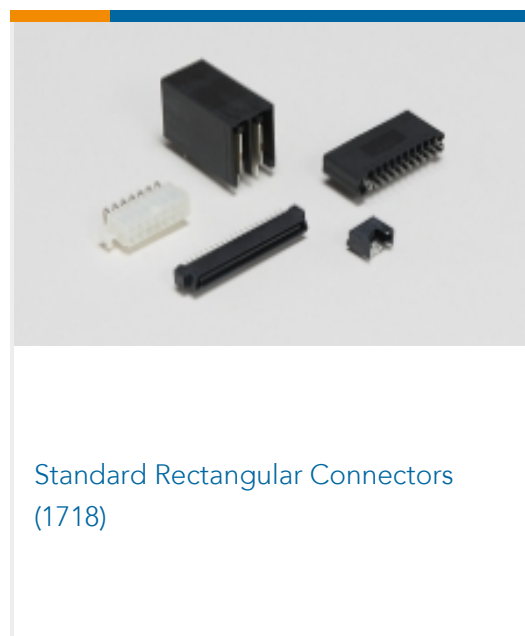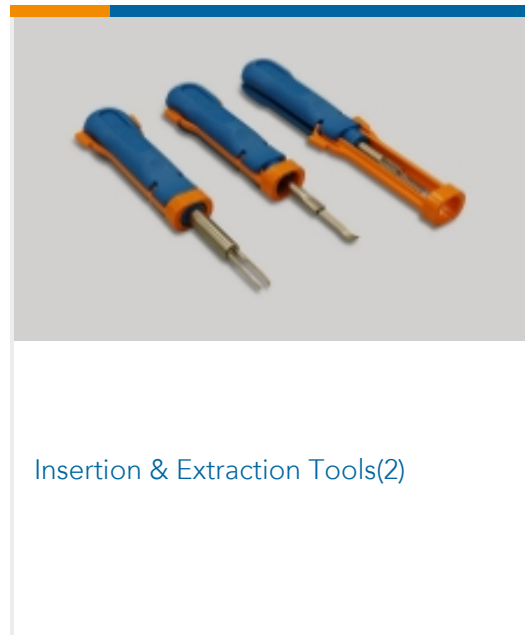

## Customers Also Bought



## Documents

### Product Drawings

04P MTA100 CONN ASSY BLU

English

### CAD Files

Customer View Model

ENG\_CVM\_CVM\_3-640442-4\_Y.2d\_dxf.zip



English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_3-640442-4\\_Y.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-640442-4\\_Y.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

[MTA, CST-100 II, SL-156 and AMP Economy Power \(EP\) Connectors](#)

English

---

### Product Specifications

[Application Specification](#)

English

---

### Product Environmental Compliance

[MD\\_3-640442-4\\_02222016152\\_dmtec](#)

English

[MD\\_3-640442-4\\_02222016152\\_dmtec](#)

English

---

### Agency Approvals

[UL Report](#)

English