


Component to wire

DCS-2 / 4.8 mm terminals

10 way female housing for 2.8 and 4.8 mm terminals

Features

- Double row connector
- Lateral secondary lock for terminal position assurance (TPA)
- Plastic locking feature
- Mechanical polarization
- Several colours possible

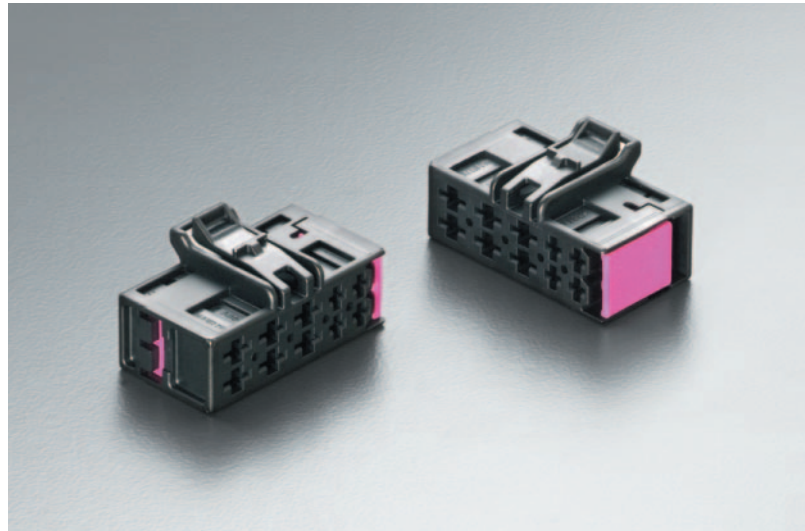

Performance characteristics

- Temperature range: from -40°C to $+120^{\circ}\text{C}$
- Contact retention force: $> 80\text{ N}$ for DCS-2 2.8 mm
- Contact insertion force: $< 15\text{ N}$ for DCS-2 2.8 mm
- Connector mating force: $> 100\text{ N}$

Construction

- Housing material: PBT

Tooling

- Terminal removal tool: consult us

Connector compatibility

- Useable terminals:
 - DCS-2 2.8 mm female terminals
 - 4.8 mm female terminals

Part Numbers	No. of position	Terminal size	Type	Colour
3 023 26 01	10	4 x [2.8 mm] / 6 x [4.8 mm]	Female housing	Black

