

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0342503065](#)
Status: **Active**
Overview: [MX150™ Sealed and Unsealed Connector System](#)
Description: MX150™ Cable Sealed Female Connector, Single Row, 3 Circuits, Polarization B, with Connector Position Assurance, Black

Documents:

[3D Model](#) [Application Specification AS-34250-100 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-34250-000 \(PDF\)](#)

General

Product Family Crimp Housings
Series [34250](#)
Application Power, Wire-to-Wire
Comments with Connector Position Assurance (CPA), Single Key
More Detailed Tech Information <http://uscar.org/guest/teams/10/Electrical-Wiring-Component-Applications-Partnership>
Overview [MX150™ Sealed and Unsealed Connector System](#)
Product Name MX150™
UPC 822350876711

Physical

Circuits (maximum) 3
Circuits Detail 3
Gender Female
Glow-Wire Compliant No
Keying to Mating Part Yes
Lock to Mating Part Yes
Material - Resin Modified Polystyrene Alloy
Net Weight 7.421/g
Number of Rows 1
Packaging Type Bag
Panel Mount No
Pitch - Mating Interface 4.50mm
Pitch - Termination Interface 4.50mm
Polarized to Mating Part Yes
Stackable No
Temperature Range - Operating -40°C to +125°C

Electrical

Current - Maximum per Contact 15.0A


Solder Process Data

Lead-freeProcess Capability N/A

Material Info

Reference - Drawing Numbers

Application Specification AS-34250-100
Product Specification PS-34250-000
Sales Drawing SD-34250-002

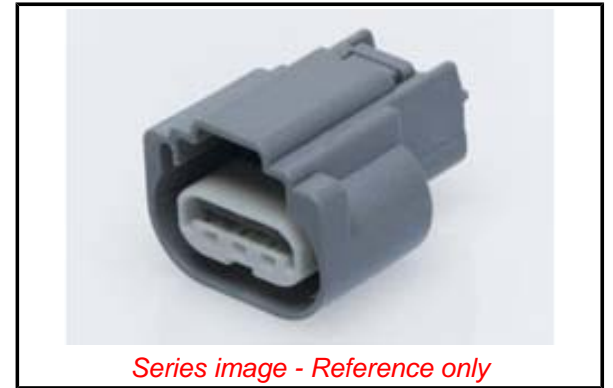

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

No -ED/108/2014 (17 Dec 2014)

Halogen-Free

Status

Not Relevant

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Not Relevant

Compliant

Search Parts in this Series

[34250 Series](#)

Use With

[34083 Tin \(Sn\) Cable Seal Female Terminal](#),
[34081 Gold \(Au\) Cable Seal Female Terminal](#)