

42238-2 ✓ ACTIVE

FASTIN-FASTON | FASTIN-FASTON 250


TE Internal #: 42238-2

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Brass, FASTIN-FASTON 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

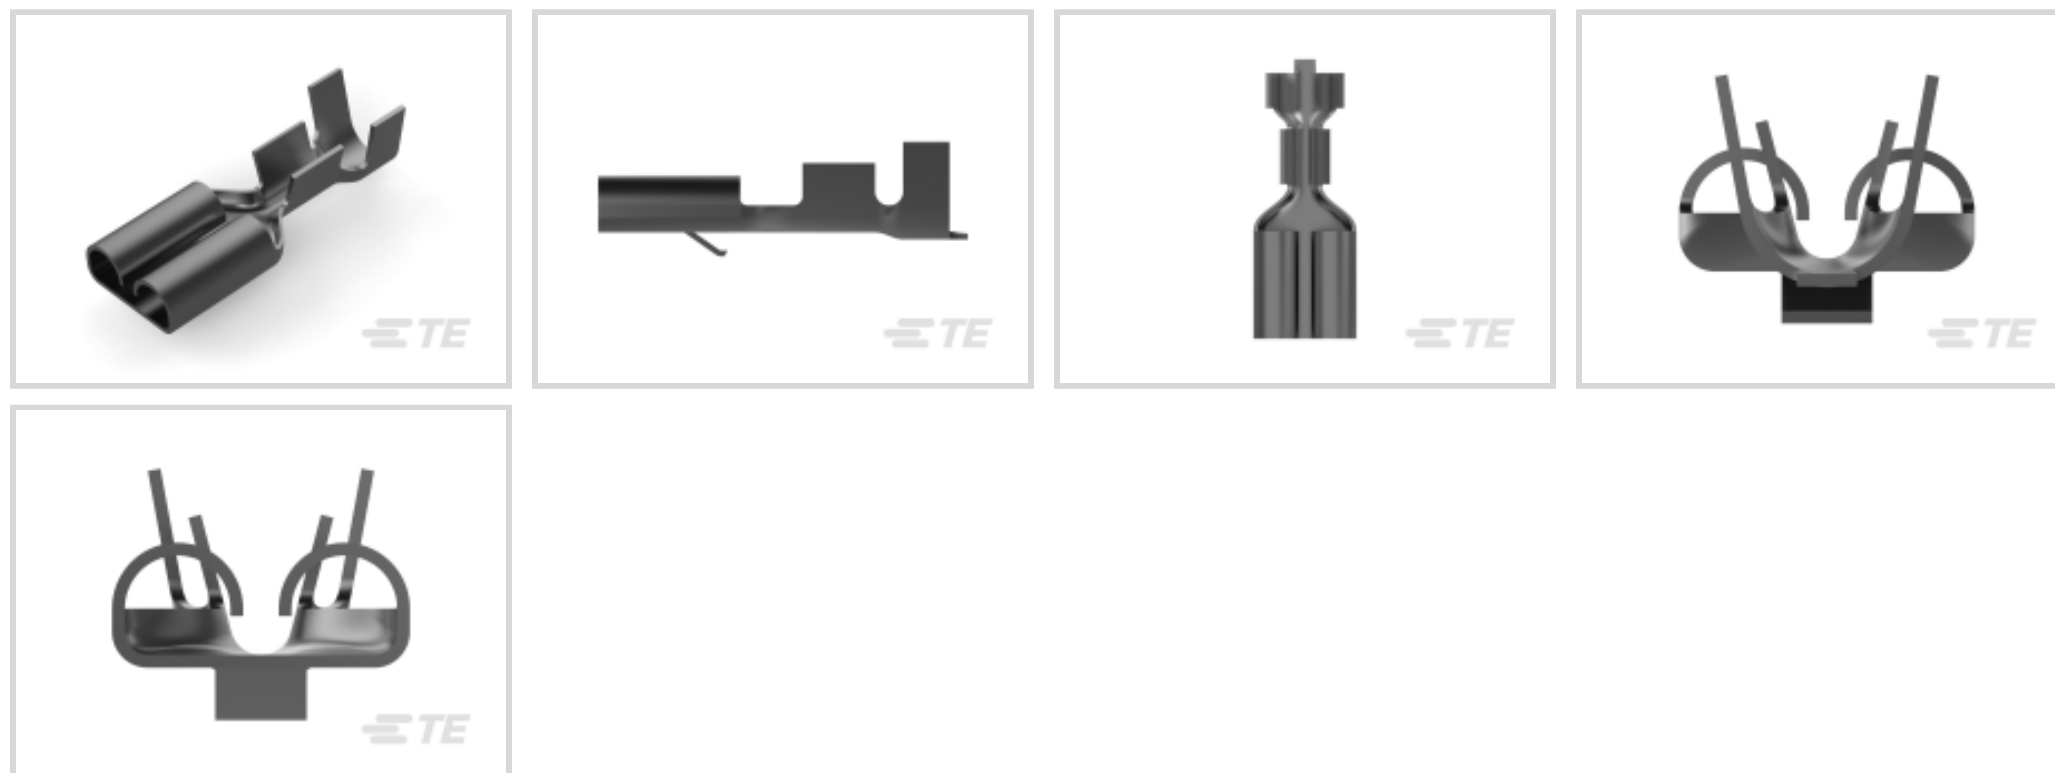

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .82 – 2.08 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Terminates To	Wire & Cable
Wire/Cable Type	Regular Wire
Insertion Force	Normal
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Mechanical Attachment

Mating Retention Type	Locking Lance
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	3.1 – 4.1 mm [.12 – .16 in]
Overall Length	20.32 mm [.8 in]
Receptacle Terminal Stock Thickness	.3 mm [.012 in]
Wire Size	.82 – 2.08 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Packaging Features

Packaging Quantity	500
Packaging Method	Loose Piece/Carton

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 720725-1
DAHT 250 FASTIN-ON TAB REC 18-14 ASSY

TE Part # 4-1579007-3
EXTRACTION TOOL KIT

TE Part # 1-1579007-4
EXTRACTION TOOL

TE Part # 42924-2
FF 250 REC 18-14AWG TPBR PRE CRIMPED

TE Part # 58524-1
PROCRIMPER TOOL & DIE

TE Part # 58524-2
PROCRIMPER DIE

TE Part # 90165-1
DAHT 250 FASTON REC 18-14 ASSY

TE Part # 3-1377175-2
SMP 0-0042238-2

Also in the Series | FASTIN-FASTON 250

Crimp Terminal Housings(218)

Insertion & Extraction Tools(2)

PCB Terminals(2)

Quick Disconnects(255)

Customers Also Bought

TE Part #180924
FF 250 TAB HSG 2P NYLON NAT

TE Part #180908-5
FF 250 TAB HSG 2P NYLON BLACK

TE Part #180941
FF 250 REC HSG 3P NYLON NAT

TE Part #180384-2
FF 250 REC 4-6MM2 PTBR LP



TE Part #1-480707-2
09P UMNL CAP HSG RED




TE Part #T1470241229-000
H24B-SGRHS-2PG29



TE Part #926474-1
FF 250 REC HSG 2P NYLON NAT



TE Part #1776491-2
Str Side Wire Entry, 5.0mm, HT, Blue

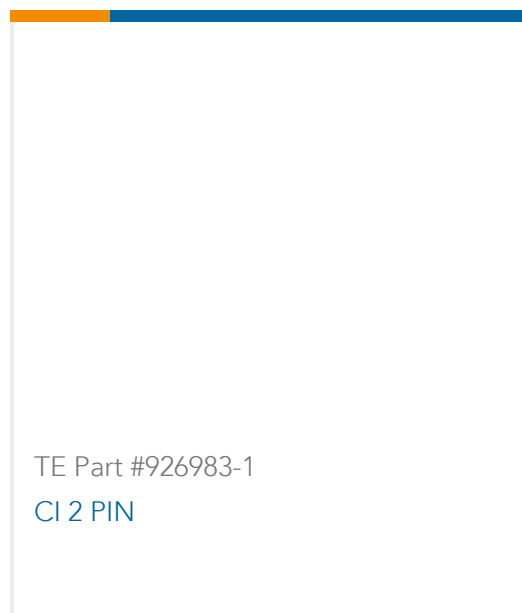

TE Part #926983-1
CI 2 PIN

Documents

Product Drawings

[FF 250 REC 18-14AWG TPBR PRE CRIMPED](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_42238-2_AJ_c-42238-2-aj.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_42238-2_AJ_c-42238-2-aj.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_42238-2_AJ_c-42238-2-aj.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[FASTIN_FASTON_Product_Line](#)

English

Product Environmental Compliance

[TE Material Declaration](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

42238-2

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size,
Mating Tab Width .25 in [6.35 mm], Straight, Brass, FASTIN-FASTON 250



Japanese

[Instruction Sheet \(non U.S.\)](#)

Japanese