

Quick Disconnects


LISTED



1-800-800-0449




Fully Insulated Piggyback QD's



Wire Range	Tab Size	Part Number	Max. Wire Insul. Dia.	W Max Width.	Max. Length
22-18AWG (0.3-1.0)	.250x.032	AA-2317	.060	.370	.866
16-14 AWG (1.2-2.0)	.250x.032	BB-2318	.145	.380	.860
12-10AWG (3.0-6.0)	.250x.032	C-2319	.150	.365	1.020
22-18AWG (0.3-1.0)	.250x.032	AA-2317X	.060	.370	.946
16-14 AWG (1.0-2.6)	.250x.032	BB-2318X	.085	.370	.946
12-10AWG (2.6-6.6)	.250x.032	C-2319X	.275	.380	1.04


Open Barrel Strip Piggyback QD's



Wire Range	Tab Size	Max. Wire Insul. Dia.	Brass Part#	Tin Plated Part#	Max. Length
22-16AWG (0.3-1.2)	.250x.032	.145 (3,7)	AAZ-0304	AAZ-4304	.802 (20,4)
18-12 AWG (1.0-3.0)	.250x.032	.180 (20,4)	BBZ-0305	BBZ-4305	.802 (20,4)




Open Barrel Strip Locking Quick Disconnect

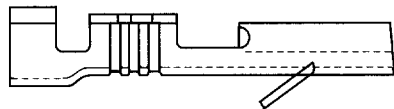

Wire Range	Tab Size	Max. Wire Insul. Dia.	Brass Part#	Tin Plated Part#	Max. Length
22-16AWG (0.3-1.2)	.250x.032	.145 (3,7)	AAZ-0155	AAZ-4155	.802 (20,4)
18-12 AWG (1.0-3.0)	.250x.032	.180 (20,4)	BBZ-0156	BBZ-4156	.802 (20,4)

Open Barrel Strip Flag Quick Disconnects

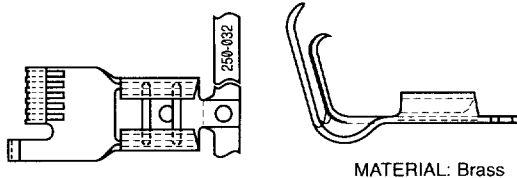

MATERIAL: Brass

Wire Range	Tab Size	Brass Part #	Tin Plated Part #
20-16 AWG (.52-1.3)	.250x.032	35725-2600	35725-2610
	.187x.020	35718-1200	35718-1210
	.187x.032	35718-2100	35718-2110

These Flags will also fit on hemetic tabs.