



FEATURES AND SPECIFICATIONS

Features and Benefits

- 2 to 3 circuits
- Low profile
- High reliability rising clamp
- Captive screw
- Manufactured to VDE standards
- Available in blocks of 2 and 3 positions, which allow any configuration to be assembled with minimum inventory

Reference Information

UL: File E 167473
 CSA: File LR 102896
 VDE: Reg. N. 5659 ÜG

Electrical

Voltage: 250V
 Maximum Current: 13.5 Amp
 Insulation Resistance: > 5,000 Megaohms

Mechanical

Rec. Tightening Torque: 4.4 in. lbs, .50 Nm
 Operating Temperature: 110°C
 Wire Strip Length: 0.20"/0.24" or 5/6 mm

Physical

Housing: Polyamide 94V-0, Black
 Screws: 3mm Copper Alloy
 Screw Plating: Nickel
 Cage Clamp: Copper alloy
 Cage Clamp Plating: Nickel
 Pins: Copper Alloy
 Pin Plating: Tin
 Wire Range: 14 to 30 AWG, 1.5 to 0.2mm²



5.08mm (.200") Pitch
 Beau Eurostyle®
 Low Profile
 Fixed Blocks

39880
 Modular




88 Series

CATALOG DRAWING (FOR REFERENCE ONLY)

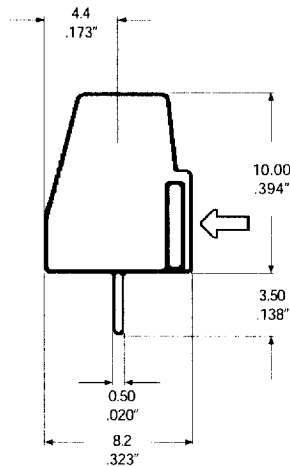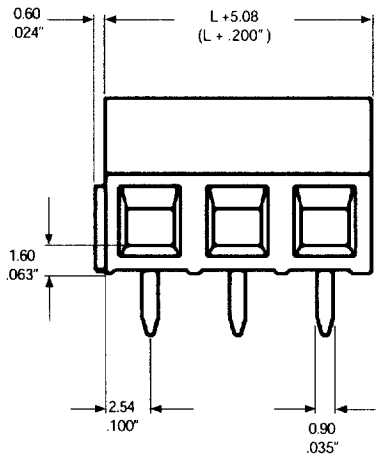

RECOMMENDED PTH PATTERN



ORDERING INFORMATION AND DIMENSIONS

Part Number *		# of Circuits	L	
Order #	Engineering #		in	mm
39880-0302	880102	2	.20	5.08
39880-0303	880103	3	.40	10.16

*Consult factory for imprinting and other options