

41412 ✓ ACTIVE

FASTON | FASTON 250

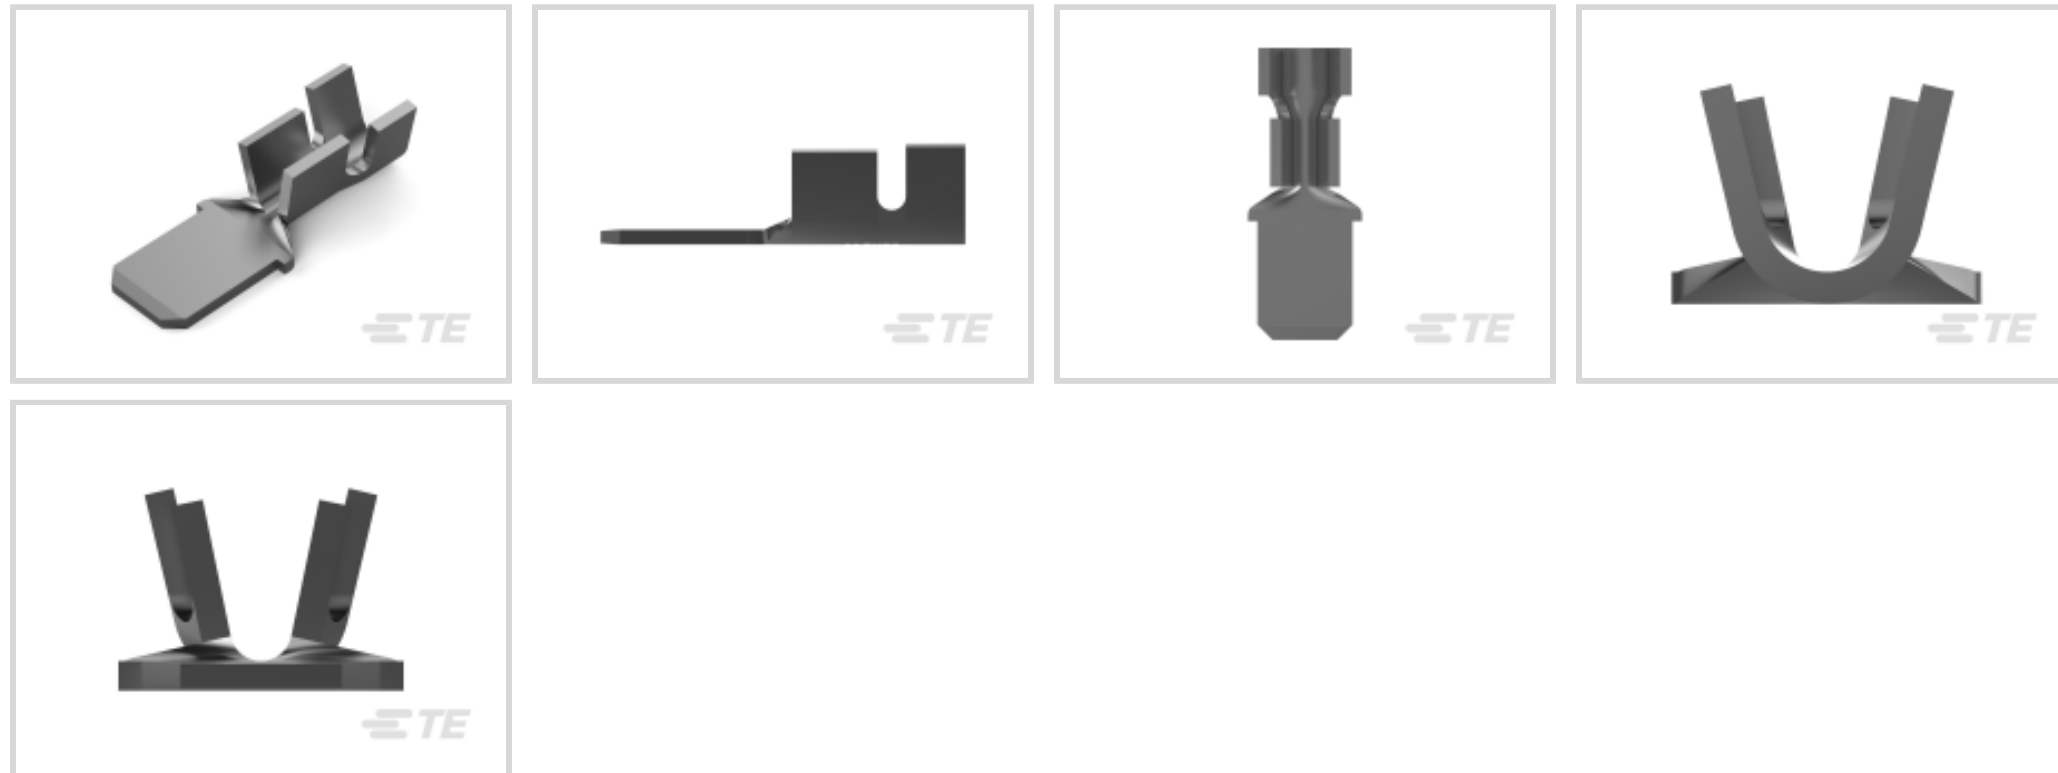
TE Internal #: 41412

Quick Disconnects, Tab, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Brass, Tin Plating, FASTON 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Tab**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Terminates To	Wire & Cable
Wire/Cable Type	Regular Wire
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open



Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Accepts Wire Insulation Diameter Range	3.1 – 4.3 mm [.12 – .17 in]
Overall Length	19.69 mm [.775 in]
Receptacle Terminal Stock Thickness	.79 mm [.031 in]
Wire Size	.82 – 2.08 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Industry Standards

UL Rating	Listed
CSA Certified	Yes

Packaging Features

Packaging Quantity	8000
Packaging Method	Strip/Reel

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

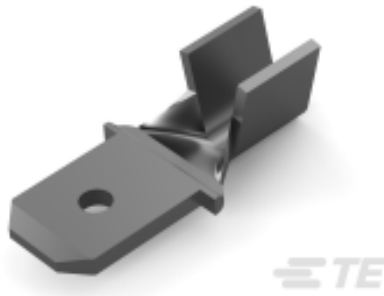
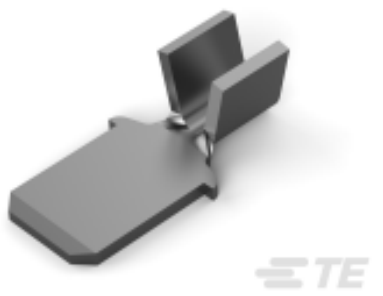
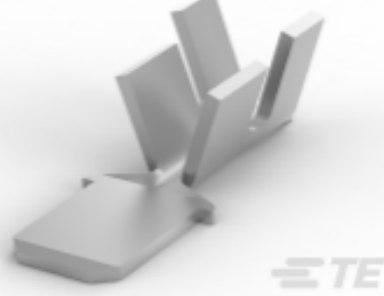



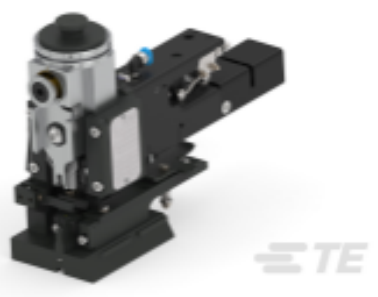





Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as


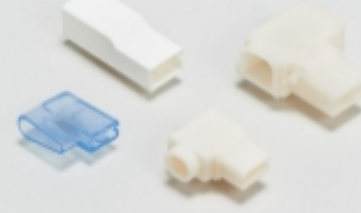




EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 63919-1 187 FASTON TAB 18-14 AWG TPBR</p>	 <p>TE Part # 61367-3 250 FASTON TAB 18-14 AWG TPBR</p>	 <p>TE Part # 180353-3 250 FASTON,TAB,12-10 AWG,TPBR</p>	 <p>TE Part # 2-2150412-1 OCEAN_2.0_Applicator-E-140F180F</p>
 <p>TE Part # 2-2150412-2 OCEAN_2.0_Applicator-E-140F180F</p>	 <p>TE Part # 2-2150729-2 OCEAN_2.0_Applicator-E-0900</p>	 <p>TE Part # 2150412-1 OCEAN_2.0_Applicator-E-140F180F</p>	 <p>TE Part # 2150412-2 OCEAN_2.0_Applicator-E-140F180F</p>
 <p>TE Part # 7-2150412-1 OCEAN_2.0_Applicator-E-140F180F</p>	 <p>TE Part # 7-2150412-2 OCEAN_2.0_Applicator-E-140F180F</p>	 <p>KIT REPRESENTATION ONLY</p> <p>TE Part # 7-2150412-7 OCEAN_2.0_SPARE_PART_KIT-140F180F</p>	 <p>REPRESENTATION ONLY</p> <p>TE Part # 90120 DAHT 250 FASTON REC 14-10 ASSY</p>

Also in the Series | FASTON 250

 <p>Compression Connectors(4)</p>	 <p>Crimp Terminal Housings(143)</p>	 <p>Insertion & Extraction Tools(6)</p>	 <p>Magnet Wire Terminals(1)</p>
--	---	--	---



PCB Terminals(144)

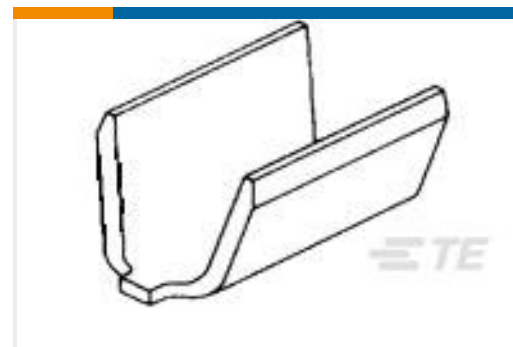
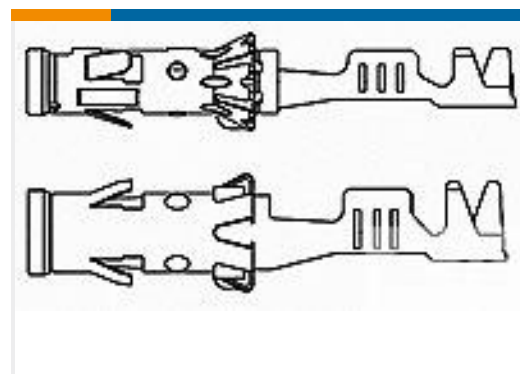
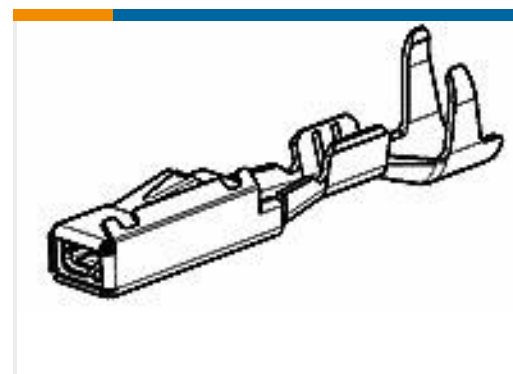


Quick Disconnects(456)



Splices(4)

Customers Also Bought

TE Part #DT04-3P-CE04
REC, 3P, GRY, E, XCAPTE Part #316769-1
POWER D/LOCK CAP HSG 1P
NATURATE Part #60932-2
SPLICE 2500-4700 .020 TPSTTE Part #62011-2
250 FASTON FLAG REC 12-10 AWG
TPBRTE Part #3-1447221-5
S/S CONN REC CONTACT ASSEMBLYTE Part #929971-1
BU-KONTAKT 2,5MMDTE Part #1355556-1
MQS1,5 Sn rec LL unseal. 0,35-0,5TE Part #1-1326031-2
2.8MM BLD,SEAL,12AWG, REV REELTE Part #184095-2
RECPT, CONTACT .070, PTPPHBZ

Documents

Product Drawings

[FASTON 250\(6.3MM\) TAB 18-14 AWG TPBR](#)

English

CAD Files

[3D PDF](#)

3D

[Customer View Model](#)

[ENG_CVM_CVM_41412_F.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_41412_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_41412_F.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[FASTIN_FASTON_Product_Line](#)

English

FASTON Tabs

English

Product Environmental Compliance

[TE Material Declaration](#)

English

Agency Approvals

[Agency Approval Document](#)

English