

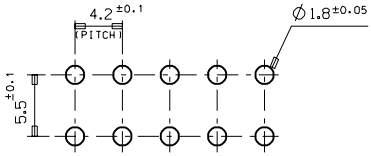

RECOMMENDED P.C.BOARD PATTERN

NOTES

1. WHEN MATED WITH 5557-NR, 5557-NR-210 TO BE SURELY LOCKED.
2. MATERIAL: WAFER — NYLON66 UL94V-0
   NYLON66 UL94V-2
   PIN — BRASS (TIN PLATED)

LEGEND

35318 - ** * *

- 0:NATURAL
  1:BLACK
- 1:NYLON66 UL94V-0
  2:NYLON66 UL94V-2
- CKT

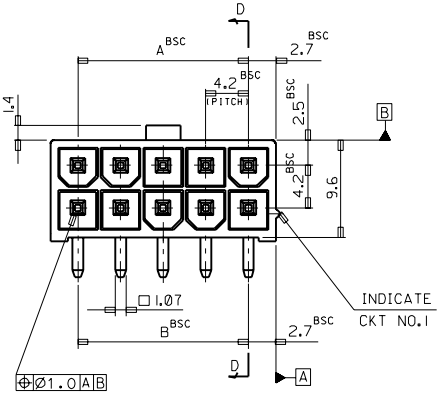



SECT. D-D

A	B	ENG.NO.	CIRCUIT
46.2	46.2	35318 -24**	24
42.0	42.0	-22**	22
37.8	37.8	-20**	20
33.6	33.6	-18**	18
29.4	29.4	-16**	16
25.2	25.2	-14**	14
21.0	21.0	-12**	12
16.8	16.8	-10**	10
12.6	12.6	-08**	8
8.4	8.4	-06**	6
4.2	4.2	35318 -04**	4

LTR	REVISION RECORD	ECN	DATE
B	REVISED	96-022	96/2/26
A	NEW RELEASED	94-074	94/12/20
1	REVISED	94-017	94/9/7
0	PRE-RELEASED		93/5/1

REVISE ONLY ON CAD SYSTEM

MATERIAL

GENERAL TOLERANCE
DIMENSION : ± 0.3
ANGLE : ± 1°
DIMENSION CLASSIFICATION
▽ : CRITICAL ▼ : MAJOR
( ) : REFERENCE

ASS'Y PART

DESCRIPTION	ENG. NO.

molex MOLEX-KOREA CO.,LTD.

DRAWN BY D.J.KIM
CHK'D BY
APP'D BY
SCALE 3/1

TITLE: NEW MINI FIT CONN. R/A WAFER ASS'Y
SHEET

ENG. NO. SD-35318-****
REV B

ENG. NO SD-35318-****
EDP NO. 35318-****
SIMILAR ITEM
PROJECT NO.

THIS DROWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(KOREA) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

MX-A3(ANSI:290,420)