






SEC' : B-B''

NOTES


1. MATERIAL : PHOSPHOR BRONZE
0.3mm THICKNESS
2. FINISH : PRE-PLATED TIN
3. RECOMMENDED LENGTH OF WIRE STRIP IS 4.0-4.8mm.

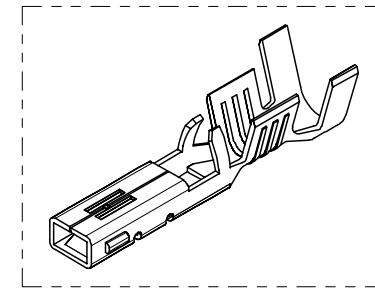

ISOMETRIC VIEW

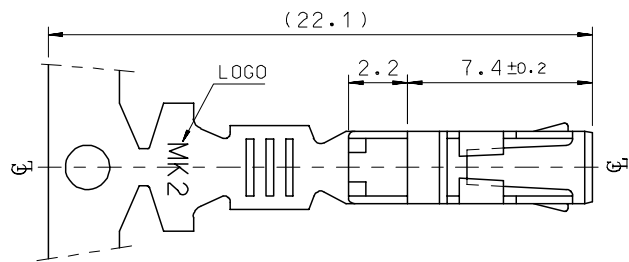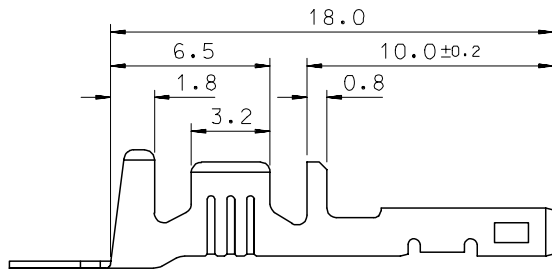

SEC' : C-C''



SEC' : D-D''

MATERIAL NO	ENG. No.	AWG	a	b	c	d	PITCH P
357460210	35746-0210	#18-#14	3.4	3.8	5.2	4.8	12.0
357460110	35746-0110	#22-#20	2.85	2.8	4.2	4.0	10.6
357460410	35746-0410	#24	2.2	1.75	3.85	3.5	10.6

REVISED	DESCRIPTION
EC NO: KOR2008-0087	
DRWN: JHPARK01 2007/11/15	
CHKD: WY. YANG 2007/11/15	
APPR: YUNSIKKIM 2007/11/15	

QUALITY SYMBOLS	
▽=0	
△=0	

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	
	INCH	
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.3	± ---
1 PLACE	± 0.3	± ---
ANGULAR ± 1 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
MM ONLY		4:1		METRIC			
DRAWN BY	DATE	TITLE					
BK.CH01	1992/11/17	.070 FEMALE TERMINAL (A-TYPE)					
CHECKED BY	DATE						
BK.CH01	1992/11/17						
APPROVED BY	DATE						
CW.LEE	1992/11/17						
MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
				1 OF 01			

MOLEX INCORPORATED	
SD-35746-001	
SEE TABLE	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	