

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0430452212

Status:

Active

Overview:

Micro-Fit Connector System

Description:

Micro-Fit 3.0 Vertical Header, 3.00mm Pitch, Dual Row, 22 Circuits, with PCB Polarizing Peg, Tin, Glow-Wire Capable, Black

Documents:

- Drawing (PDF)

3D Model (PDF)

3D Model

Product Specification PS-43045-001 (PDF)

Packaging Specification PK-70873-0314-001 (PDF)

Test Summary 430450004-TS-000 (PDF)
- Test Summary TS-43045-001-001 (PDF)

Test Summary TS-46235-001-001 (PDF)

Datasheet (PDF)

Symbol Footprint Data SYM-43045-2212 (PDF)

Symbol Footprint Data SYM-43045-221X (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

UL

LR19980

E29179

General

Product Family

Series

Application

Comments

PCB Headers

43045

Power, Wire-to-Board

High Temperature|Square Pin|Offset Through Hole Mounting|Solder Type<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.

Micro-Fit Connector System

Micro-Fit 3.0

800753576384

Overview

Product Name

UPC

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

Flammability

Glow-Wire Capable

Mated Height

Material - Metal

Material - Plating Mating

No

22

22

Black

30


94V-0

Yes

17.64mm

Brass

Tin

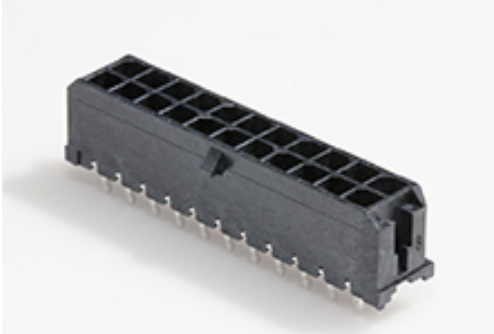

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -  
D(2020)4578-DC (25  
June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

43045 Series

Mates With

Micro-Fit 3.0 Receptacle Housing [43025](#)  
<br>Micro-Fit 3.0 TPA Receptacle Housing  
[172952](#)

|                                                |                                                      |
|------------------------------------------------|------------------------------------------------------|
| Material - Plating Termination                 | Tin                                                  |
| Material - Resin                               | High Temperature Thermoplastic                       |
| Net Weight                                     | 2.917/g                                              |
| Number of Rows                                 | 2                                                    |
| Orientation                                    | Vertical                                             |
| PCB Locator                                    | Yes                                                  |
| PCB Retention                                  | Yes                                                  |
| PCB Thickness - Recommended                    | 1.60mm                                               |
| Packaging Type                                 | Tray                                                 |
| Pitch - Mating Interface                       | 3.00mm                                               |
| Plating min - Mating                           | 0.254μm                                              |
| Polarized to PCB                               | Yes                                                  |
| Shrouded                                       | Fully                                                |
| Stackable                                      | No                                                   |
| Surface Mount Compatible (SMC)                 | Yes                                                  |
| Temperature Range - Operating                  | -40° to +105°C                                       |
| Termination Interface: Style                   | Through Hole - Kinked Pin                            |
| <b>Electrical</b>                              |                                                      |
| Current - Maximum per Contact                  | 8.5A                                                 |
| Voltage - Maximum                              | 600V                                                 |
| <b>Solder Process Data</b>                     |                                                      |
| Duration at Max. Process Temperature (seconds) | 030                                                  |
| Lead-freeProcess Capability                    | SMC&WAVE                                             |
| Max. Cycles at Max. Process Temperature        | 003                                                  |
| Process Temperature max. C                     | 260                                                  |
| <b>Material Info</b>                           |                                                      |
| <b>Reference - Drawing Numbers</b>             |                                                      |
| Packaging Specification                        | PK-70873-0314-001                                    |
| Product Specification                          | PS-43045-001                                         |
| Sales Drawing                                  | SD-43045-005                                         |
| Symbol/Footprint Data                          | SYM-43045-2212, SYM-43045-221X                       |
| Test Summary                                   | 430450004-TS-000, TS-43045-001-001, TS-46235-001-001 |

This document was generated on 07/15/2020

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION