

42100-1 ✓ ACTIVE

FASTIN-FASTON | FASTIN-FASTON 250


TE Internal #: 42100-1

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Brass, FASTIN-FASTON 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

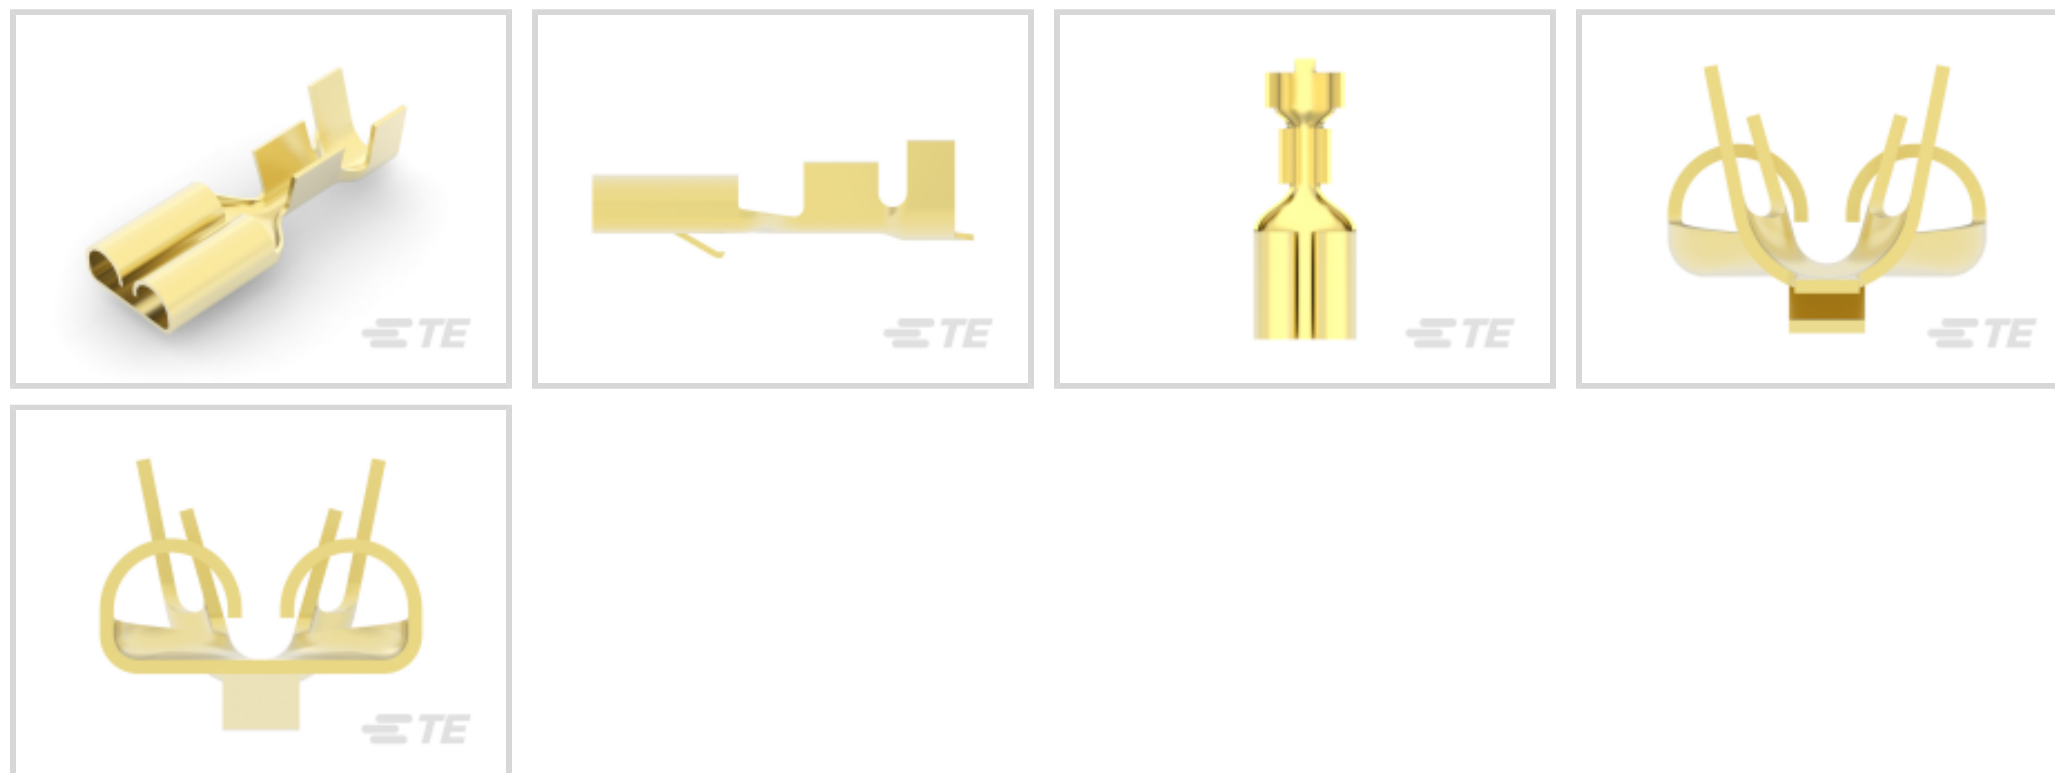

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Terminates To	Wire & Cable
Wire/Cable Type	Regular Wire
Insertion Force	Normal
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open



Mechanical Attachment

Mating Retention Type	Locking Lance
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	2.54 – 4.32 mm [.1 – .17 in]
Overall Length	21.34 mm [.84 in]
Receptacle Terminal Stock Thickness	.3 mm [.012 in]
Wire Size	.82 – 2.08 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Industry Standards

UL Rating	Recognized
CSA Certified	Yes

Packaging Features

Packaging Quantity	12000
Packaging Method	Strip/Reel

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 63833-1
FF 187 REC 18-14AWG BR

TE Part # 58524-1
PROCRIMPER TOOL & DIE

TE Part # 58524-2
PROCRIMPER DIE

TE Part # 157480-2
FF 250 REC 0.8-2MM2 TPBR

TE Part # 2-2150238-1
OCEAN_2.0_Applicator-E-110F180F

TE Part # 2-2150238-2
OCEAN_2.0_Applicator-E-110F180F

TE Part # 2-2150843-1
OCEAN_2.0_Applicator-E-100F180F

TE Part # 2-2150843-2
OCEAN_2.0_Applicator-E-100F180F

TE Part # 2150238-1
OCEAN_2.0_Applicator-E-110F180F

TE Part # 2150238-2
OCEAN_2.0_Applicator-E-110F180F

TE Part # 2150843-1
OCEAN_2.0_Applicator-E-100F180F

TE Part # 2150843-2
OCEAN_2.0_Applicator-E-100F180F

KIT
REPRESENTATION ONLY

TE Part # 7-2150238-7
OCEAN_2.0_SPARE_PART_KIT-110F180F

TE Part # 7-2150843-1
OCEAN_2.0_Applicator-E-100F180F

TE Part # 7-2150843-2
OCEAN_2.0_Applicator-E-100F180F

KIT
REPRESENTATION ONLY

TE Part # 7-2150843-7
OCEAN_2.0_SPARE_PART_KIT-100F180F

Also in the Series | FASTIN-FASTON 250




Crimp Terminal Housings(218)



Insertion & Extraction Tools(2)





PCB Terminals(2)

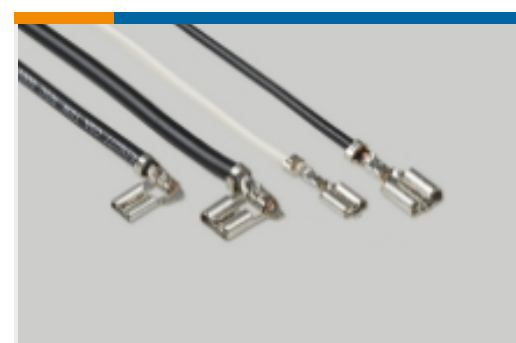

Quick Disconnects(255)

Customers Also Bought

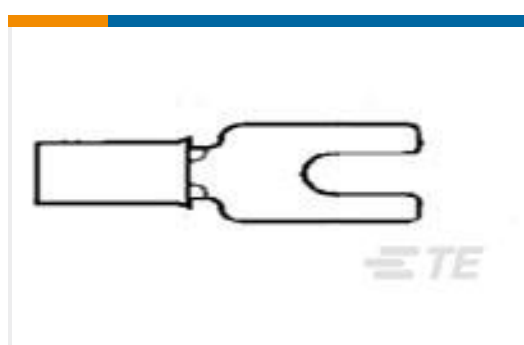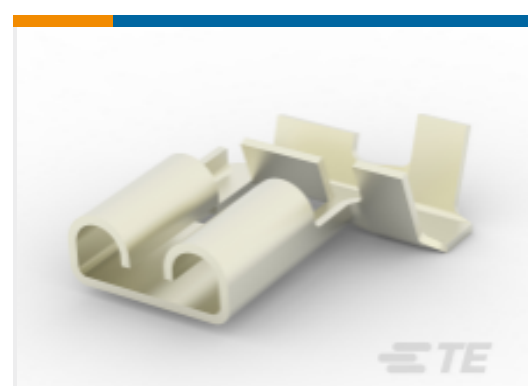TE Part #9-1393243-2
RT425615TE Part #35116
TERMINAL,BUDG SPD 16-14 8TE Part #4-1904020-7
V23234A0001X040-EV-100TE Part #1977144-4
Slide Switch DPDT dual actuator, SMT
T&RTE Part #2286377-1
250 FASTON,FLAG,REC.,22-18 AWG,
NPSTTE Part #HPP808H034
HTF3000LFSMDRL RH/T MODULE

TE Part #GA10K63D10-2



TE Part #GA2X10K3D962

Documents

Product Drawings

[FF 250 REC 18-14AWG BR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_42100-1_DS_c-42100-1-ds.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_42100-1_DS_c-42100-1-ds.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_42100-1_DS_c-42100-1-ds.3d_stp.zip](#)



English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[FASTIN_FASTON_Product_Line](#)

English

[Positive Lock Receptacles](#)

English

Product Specifications

[FASTIN-FASTON CONN. .110 INCH, .187 INCH, .250 INCH, .375 INCH SRS.](#)

English

[Product Specification](#)

English

Product Environmental Compliance

[TE Material Declaration](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

Japanese

[Instruction Sheet \(non U.S.\)](#)

Japanese