

5-104074-4 ✓ ACTIVE

AMPMODU | AMPMODU System 50


TE Internal #: 5-104074-4

PCB Mount Header, Right Angle, Board-to-Board, 20 Position, .05 in [1.27 mm] Centerline, Fully Shrouded, Gold, AMPMODU System 50

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

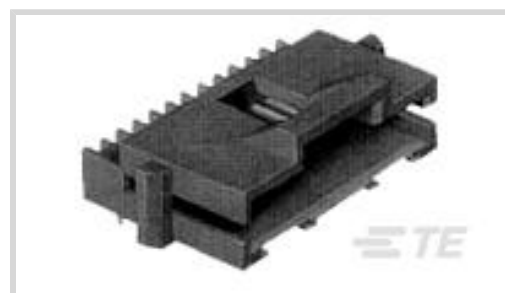

PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Board-to-Board**

Number of Positions: **20**

Number of Rows: **1**

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| PCB Connector Assembly Type | PCB Mount Header |
| Connector System | Board-to-Board |
| Header Type | Fully Shrouded |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

| | |
|----------------------------------|---------------|
| Connector Contact Load Condition | Fully Loaded |
| PCB Mount Orientation | Right Angle |
| Number of Positions | 20 |
| Number of Rows | 1 |
| Board-to-Board Configuration | Perpendicular |

Electrical Characteristics

| | |
|---------------------------------------|---------|
| Dielectric Withstanding Voltage (Max) | 500 VAC |
| Insulation Resistance | 5000 MΩ |
| Operating Voltage | 30 VAC |

Body Features

| | |
|--|-----------------|
| PCB Retention Feature Plating Material | Tin over Nickel |
| Connector Profile | Standard |



| | |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Contact Features

| | |
|---|---|
| Mating Square Post Dimension | .38 mm[.015 in] |
| PCB Contact Termination Area Plating Material Thickness | 3.81 – 6.35 μ m[150 – 250 μ in] |
| PCB Contact Termination Area Plating Material Finish | Matte |
| Contact Shape & Form | Rectangular Post |
| Contact Underplating Material | Nickel |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Base Material | Copper Alloy |
| Contact Mating Area Plating Material | Gold |
| Contact Mating Area Plating Material Thickness | .76 μ m[30 μ in] |
| Contact Type | Pin |
| Contact Current Rating (Max) | 3.6 A |

Termination Features

| | |
|---|-----------------------|
| Round Termination Post & Tail Diameter | .38 mm[.015 in] |
| Termination Post & Tail Length | 2.54 mm[.1 in] |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

| | |
|--------------------------|----------------|
| Mating Retention | With |
| PCB Mount Retention Type | Hold-Down Post |
| Mating Retention Type | Latching |
| Mating Alignment | With |
| Mating Alignment Type | Polarization |
| PCB Mount Retention | With |
| PCB Mount Alignment | Without |
| Connector Mounting Type | Board Mount |

Housing Features

| | |
|--------------------|-----------------|
| Centerline (Pitch) | 1.27 mm[.05 in] |
| Housing Material | LCP |

Dimensions

| | |
|-----------------------------|------------------|
| PCB Thickness (Recommended) | 1.57 mm[.062 in] |
|-----------------------------|------------------|

Usage Conditions



| | |
|-----------------------------|----------------------------|
| Housing Temperature Rating | High |
| Operating Temperature Range | -65 – 105 °C[-85 – 221 °F] |

Operation/Application

| | |
|------------------------|----------------|
| Solder Process Feature | Board Standoff |
| Circuit Application | Signal |

Industry Standards

| | |
|------------------------|-----------------------|
| UL Rating | Recognized |
| Agency/Standard | CSA, UL |
| Approved Standards | CSA LR7189, UL E28476 |
| UL Flammability Rating | UL 94V-0 |

Packaging Features

| | |
|--------------------|-----------|
| Packaging Quantity | 16 |
| Packaging Type | Box, Tube |

Other

| | |
|----------------------------|---|
| Position Locations Omitted | 0 |
|----------------------------|---|

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|--|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Wave solder capable to 260°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # CAT-F439-R2435127
FFC Receptacle Housing: 1.27mm



TE Part # 5-104192-5
20 SYSTEM 50 RCPT ASSY SRS SN



TE Part # 2127932-7
C/A, SFP+, GENERIC, 3.5M

Also in the Series | AMPMODU System 50



PCB Headers & Receptacles(1014)

Customers Also Bought




TE Part #487545-5
008 HOUSING FFC RCPT 050CL SR



TE Part #1558665-3
T9GS5L14-12




TE Part #42827-2
PIN .093 RECEPTACLE 24-18 AWG TPBR

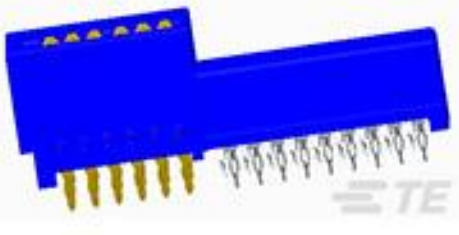

TE Part #2204061-2
CONNECTOR ASSEMBLY, SEC II POW TPBR



TE Part #3-1565082-4
GRACE INERTIA CONNECTOR 3.5 3P



TE Part #1966954002
MT2000-2.0-X-SP



TE Part #1-683403-6
ANVIL, COMBINATION



TE Part #455675-1
PLATE, BASE



Documents

Product Drawings

[20 SYSTEM 50 HDR SRRA SHRD SN](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_5-104074-4_W.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-104074-4_W.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-104074-4_W.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[AMPMODU_INTERCONNECTION_SYSTEM_SECTION3AND4](#)

English

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD_5-104074-4_032320181352_dmtec](#)

English

[MD_5-104074-4_032320181352_dmtec](#)

English