

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0457503111](#)  
**Status:** **Active**  
**Overview:** [Mini-Fit Plus Connector System](#)  
**Description:** Mini-Fit Plus Crimp Terminal, 16 AWG, Reel, Copper (Cu) Alloy, Tin (Sn)

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Crimp Terminals
Series	<a href="#">45750</a>
Application	Power, Wire-to-Board, Wire-to-Wire
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with <a href="#">45750</a> series terminals crimped to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current de-rating information.  Series 45750 is Hot-Swappable
Crimp Quality Equipment	Yes
Overview	<a href="#">Mini-Fit Plus Connector System</a>
Packaging Alternative	<a href="#">457503112</a> (Loose)
Product Name	Mini-Fit Plus
UPC	822350286039

**Physical**

Durability (mating cycles max)	100
Gender	Female
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.150/g
Packaging Type	Reel
Plating min - Mating	2.540µm
Plating min - Termination	2.540µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.30-3.10mm
Wire Size AWG	16
Wire Size mm²	N/A


**Electrical**

Current - Maximum per Contact	13.0A
Voltage - Maximum	600V

**Solder Process Data**

Lead-freeProcess Capability	N/A
-----------------------------	-----

**Material Info**

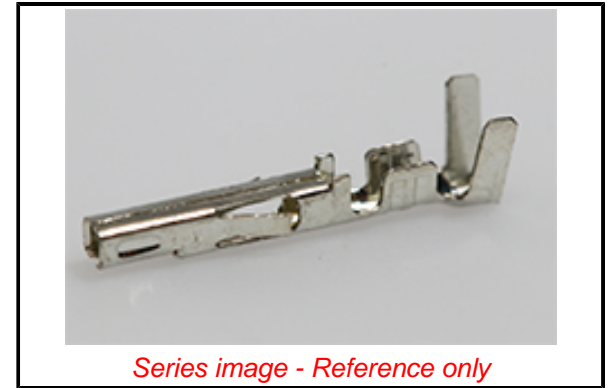

*Series image - Reference only*

**EU ELV**

**Compliant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)4578-DC (25  
June 2020)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Compliant

Not Contained

**Search Parts in this Series**

[45750](#) Series

**Mates With**

[46012](#) Mini-Fit Plus Crimp Terminal

**Use With**

[5557](#) Mini-Fit Jr., [30067](#) Mini-Fit TPA, [42474](#) Mini-Fit BMI Panel Mount, [43760](#) Mini-Fit BMI, [44516](#) Mini-Fit BMI Panel Mount Slide-N-Lock

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

Extraction Tool	<a href="#">11030044</a>
Hand Crimp Tool for Mini-Fit Jr. Male and Female Crimp Terminals, 16 AWG	<a href="#">2002182200</a>

FineAdjust Applicator [639039400](#)  
for Insulation OD  
2.20-2.45mm,  
Optimized for 16  
AWG Only

FineAdjust Applicator [639041400](#)  
for Mini-Fit Jr., Mini-  
Fit HCS, and Mini-  
Fit Plus HCS Crimp  
Terminals, 16 AWG  
with Large Insulation  
Diameters

FineAdjust [639041500](#)  
Applicator for Mini-  
Fit Crimp Terminals,  
1.80-2.20mm  
Insulation Diameter  
Wire, 16 AWG,  
1.31mm<sup>2</sup>

This document was generated on 07/22/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**