

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [5055513020](#)  
**Status:** **Active**  
**Overview:** SlimStack Board-to-Board Connectors  
**Description:** SlimStack Board-to-Board Plug, 0.40mm Pitch, B8 Series, 0.80mm Mated Height, 2.50mm Mated Width, 30 Circuits

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model</a>                                     | <a href="#">Datasheet (PDF)</a>                      |
| <a href="#">Drawing (PDF)</a>                                | <a href="#">Product Guide (PDF)</a>                  |
| <a href="#">3D Model (PDF)</a>                               | <a href="#">RoHS Certificate of Compliance (PDF)</a> |
| <a href="#">Product Specification 5055500000-002 (PDF)</a>   | <a href="#">Reference Guide (PDF)</a>                |
| <a href="#">Packaging Specification 5055519200-200 (PDF)</a> |  |

**General**

|                |   |
|----------------|---|
| Product Family | PCB Headers   |
| Series         | <a href="#">505551</a>                              |
| Application    | Board-to-Board, Signal                              |
| Overview       | <a href="#">SlimStack Board-to-Board Connectors</a> |
| Product Name   | SlimStack   |
| Series Name    | B8  |
| UPC            | 191128262026  |

**Physical**

|                                |                        |
|--------------------------------|------------------------|
| Breakaway                      | No                     |
| Circuits (Loaded)              | 30                     |
| Circuits (maximum)             | 30                     |
| Color - Resin                  | Black                  |
| Durability (mating cycles max) | 30                     |
| Glow-Wire Capable              | No                     |
| Mated Height                   | 0.80mm                 |
| Mated Width                    | 2.50mm                 |
| Material - Metal               | Copper Alloy           |
| Material - Plating Mating      | Gold                   |
| Material - Plating Termination | Gold                   |
| Material - Resin               | Liquid Crystal Polymer |
| Net Weight                     | 13.750/mg              |
| Number of Rows                 | 2                      |
| Orientation                    | Vertical               |
| PCB Locator                    | No                     |
| PCB Retention                  | Yes                    |
| Packaging Type                 | Embossed Tape on Reel  |
| Pitch - Mating Interface       | 0.40mm                 |
| Pitch - Termination Interface  | 0.40mm                 |
| Plating min - Mating           | 0.100µm                |
| Plating min - Termination      | 0.051µm                |
| Polarized to Mating Part       | No                     |
| Polarized to PCB               | No                     |
| Temperature Range - Operating  | -40° to +85°C          |
| Termination Interface: Style   | Surface Mount          |


**Electrical**

|                               |                 |
|-------------------------------|-----------------|
| Current - Maximum per Contact | 0.3A            |
| Voltage - Maximum             | 50V AC (RMS)/DC |

**Material Info**

**Reference - Drawing Numbers**

|                         |                |
|-------------------------|----------------|
| Packaging Specification | 5055519200-200 |
|-------------------------|----------------|

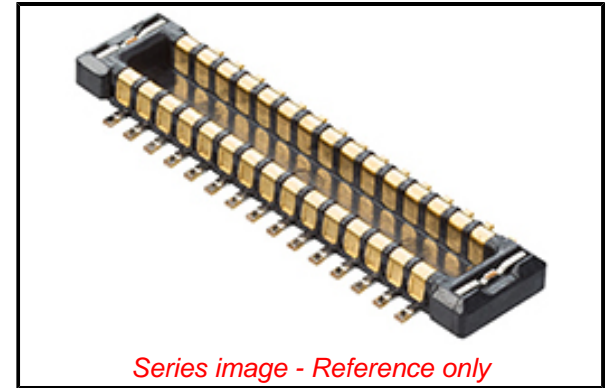

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)4578-DC (25  
June 2020)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[505551](#) Series

**Mates With**

SlimStack B8 Receptacle [505550](#)

This document was generated on 07/24/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**