


- For use with Duflex contacts.
- Stackable end-to-end.
- Passive latching with polarization and anti-reverse.
- Available in single (2-36 pos.) and double (4-72 pos.) row versions.

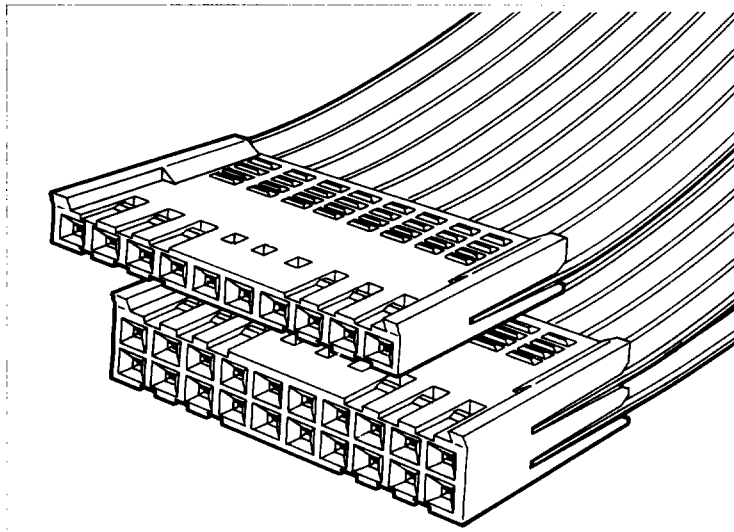

Spacing 2,54 mm (0.100 inch) single row
2,54 × 2,54 mm (0.100 × 0.100 inch) double row

Polarization By means of a polarization plug (see "Ordering data")

Material Glass-filled thermoplastic polyester (UL 94 V-0). Color: blue


Insulation resistance 1×10^5 M Ω min.

Temperature range -65° C to +125° C

Withstanding voltage 1000 V rms (sea level)

Packaging Min. quantity: 100 housings
Order in multiples of this quantity

Dimensions $\frac{\text{mm}}{\text{inches}}$

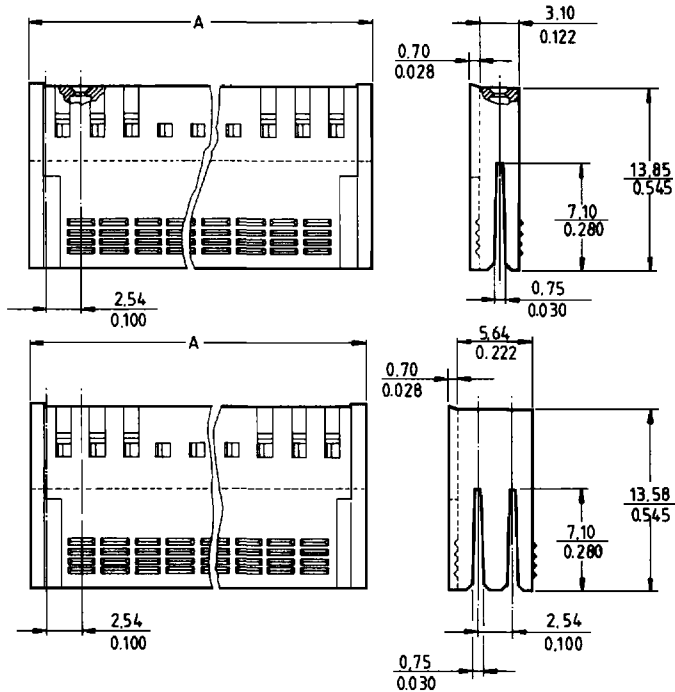

Accepts:
Duflex female contact

Mating pin

Size $\frac{0.64}{0.025}$ square

Recommended length
 $\frac{5.00}{0.197}$ min.

Number of positions		Dash numbers	Dimension A		Number of positions		Dash numbers	Dimension A	
Single Row	Double Row		mm	inches	Single Row	Double Row		mm	inches
2	4	-002	5,00	0.197	20	40	-020	50,72	1.997
3	6	-003	7,54	0.297	21	42	-021	53,26	2.097
4	8	-004	10,08	0.397	22	44	-022	55,80	2.197
5	10	-005	12,82	0.497	23	46	-023	58,34	2.297
6	12	-006	15,16	0.597	24	48	-024	60,88	2.397
7	14	-007	17,70	0.697	25	50	-025	63,42	2.497
8	16	-008	20,24	0.797	26	52	-026	65,96	2.597
9	18	-009	22,78	0.897	27	54	-027	68,50	2.697
10	20	-010	25,32	0.997	28	56	-028	71,04	2.797
11	22	-011	27,86	1.097	29	58	-029	73,58	2.897
12	24	-012	30,40	1.197	30	60	-030	76,12	2.997
13	26	-013	32,94	1.297	31	62	-031	78,66	3.097
14	28	-014	35,48	1.397	32	64	-032	81,20	3.197
15	30	-015	38,02	1.497	33	66	-033	83,74	3.297
16	32	-016	40,56	1.597	34	68	-034	86,28	3.397
17	34	-017	43,10	1.697	35	70	-035	88,82	3.497
18	36	-018	45,64	1.797	36	72	-036	91,36	3.597
19	38	-019	48,18	1.897					

Note

- Optional polarization plug 65307-001.