
# 6-968974-1 <

### AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 6-968974-1 Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid View on TE.com >



Connectors > Automotive Connectors > Connector Housings > AMP MCP, UNSEALED CONNECTOR HOUSING

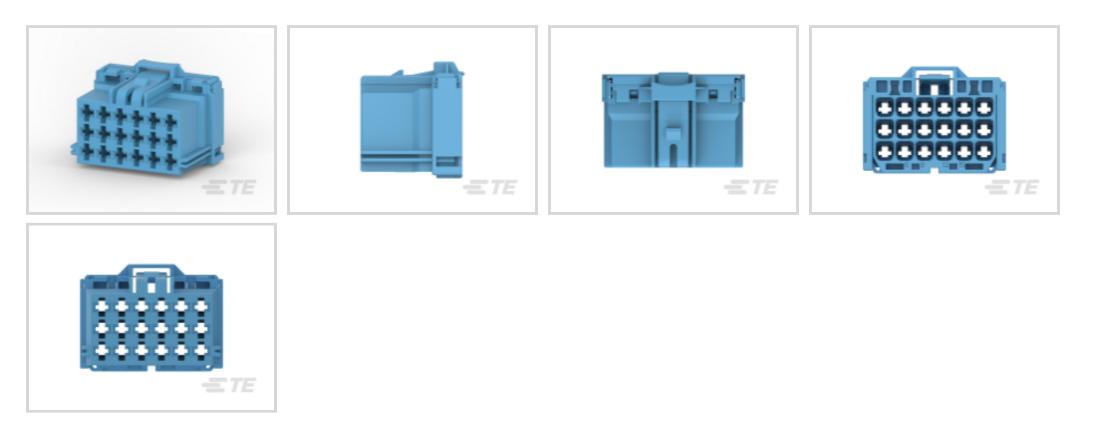

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Wire

Number of Positions: 18

Centerline (Pitch): 5 mm [.197 in ]

#### All AMP MCP, UNSEALED CONNECTOR HOUSING (187)

### Features

### Product Type Features

Connector & Housing Shape	Rectangular		
Connector & Housing Type	Housing for Female Terminals		
Connector System	Wire-to-Wire		
Sealable	No		
Hybrid Connector	No		
Primary Locking Feature	On the Terminal		
Configuration Features			
Number of Positions	18		
Number of Rows	3		
Electrical Characteristics			
Operating Voltage	28 VDC		
Nominal Voltage Architecture	12 V, 24 V		
Body Features			

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid



180°
PBT GF
Blue
С
2.8mm
Receptacle
2.8 mm[.11 in]
Without
Yes
Without
Keyed
With
Cable Mount (Free-Hanging)

Centerline (Pitch)

5 mm[.197 in]

### Dimensions

Product Width	36 mm[1.417 in]					
Product Length	36 mm[1.417 in]					
Product Height	24 mm[.945 in]					
Row-to-Row Spacing	5.5 mm[.217 in]					
Usage Conditions						
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]					
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]					
Operation/Application						
Circuit Application	Signal					
Packaging Features						
Packaging Quantity	1000					
Packaging Method	Box					

Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid



#### Other

Serviceable	No			
Connector Position Assurance Capable	No			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC			
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free			
Solder Process Capability	Not applicable for solder process capability			

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### **Compatible Parts**




Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid






TE Part # 4-966140-6 TAB HEADER2,8X0,8MM 21POS

### Also in the Series | AMP MCP 2.8

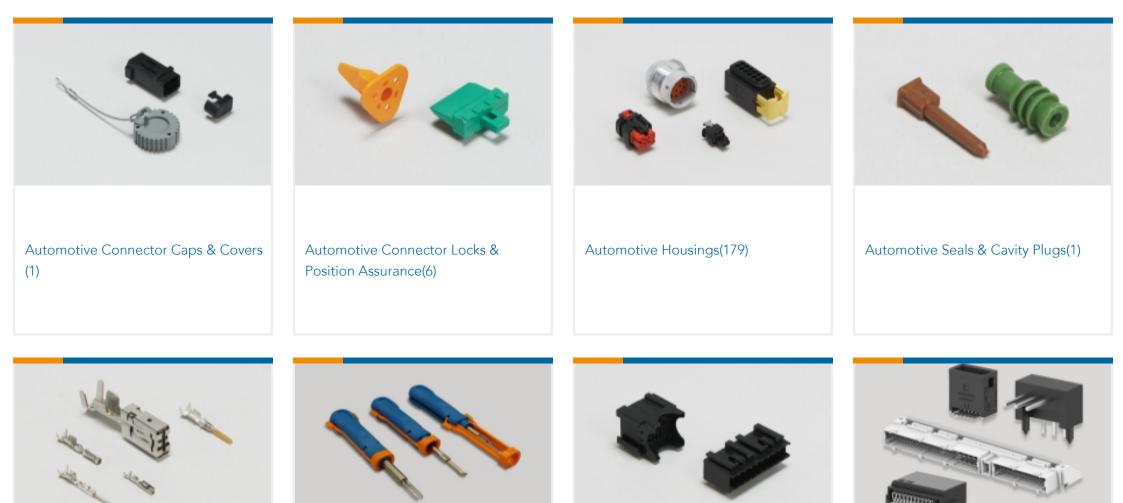


Automotive Terminals(6)	Insertion & Extraction Tools(6)	Module Components(1)	PCB Headers & Receptacles(1)	

## Also in the Series AMP MCP Connector System

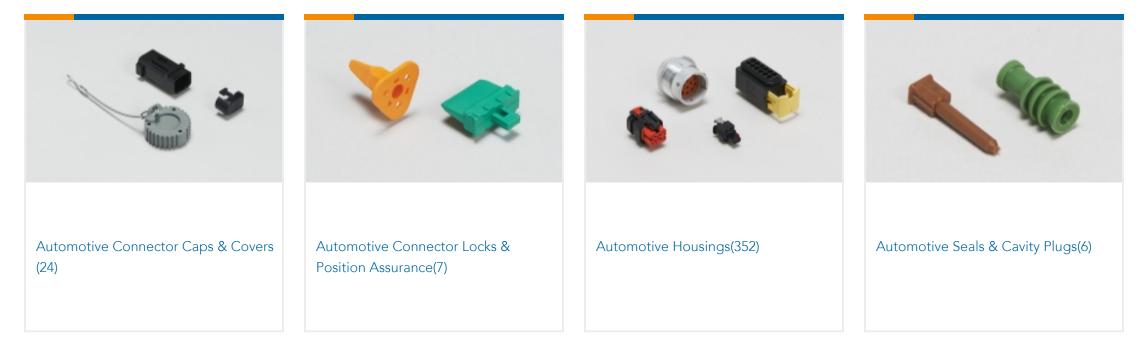

Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid



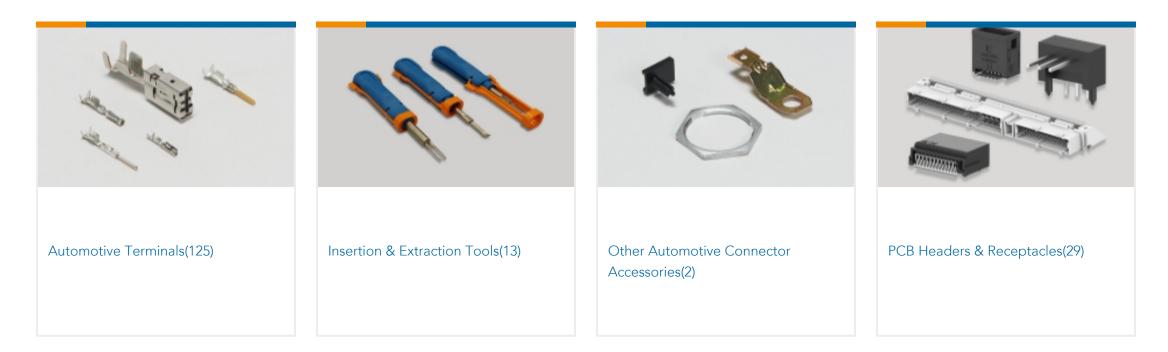

## Customers Also Bought



DTB TAB HSG ASSY, 49POSN.,CPF 0402 118K 0.1% 25PPM 1K RLJPT REC 2.8 Contact SWS Ag (LP)FAKRA TYPE

### Documents

Product Drawings MCP2.8 HSG ASSY 18P

English

### CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_6-968974-1\_F.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_6-968974-1\_F.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_6-968974-1\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid



Product Specifications Application Specification

English

Product Environmental Compliance Product Compliance

English

**Product Compliance** 

English