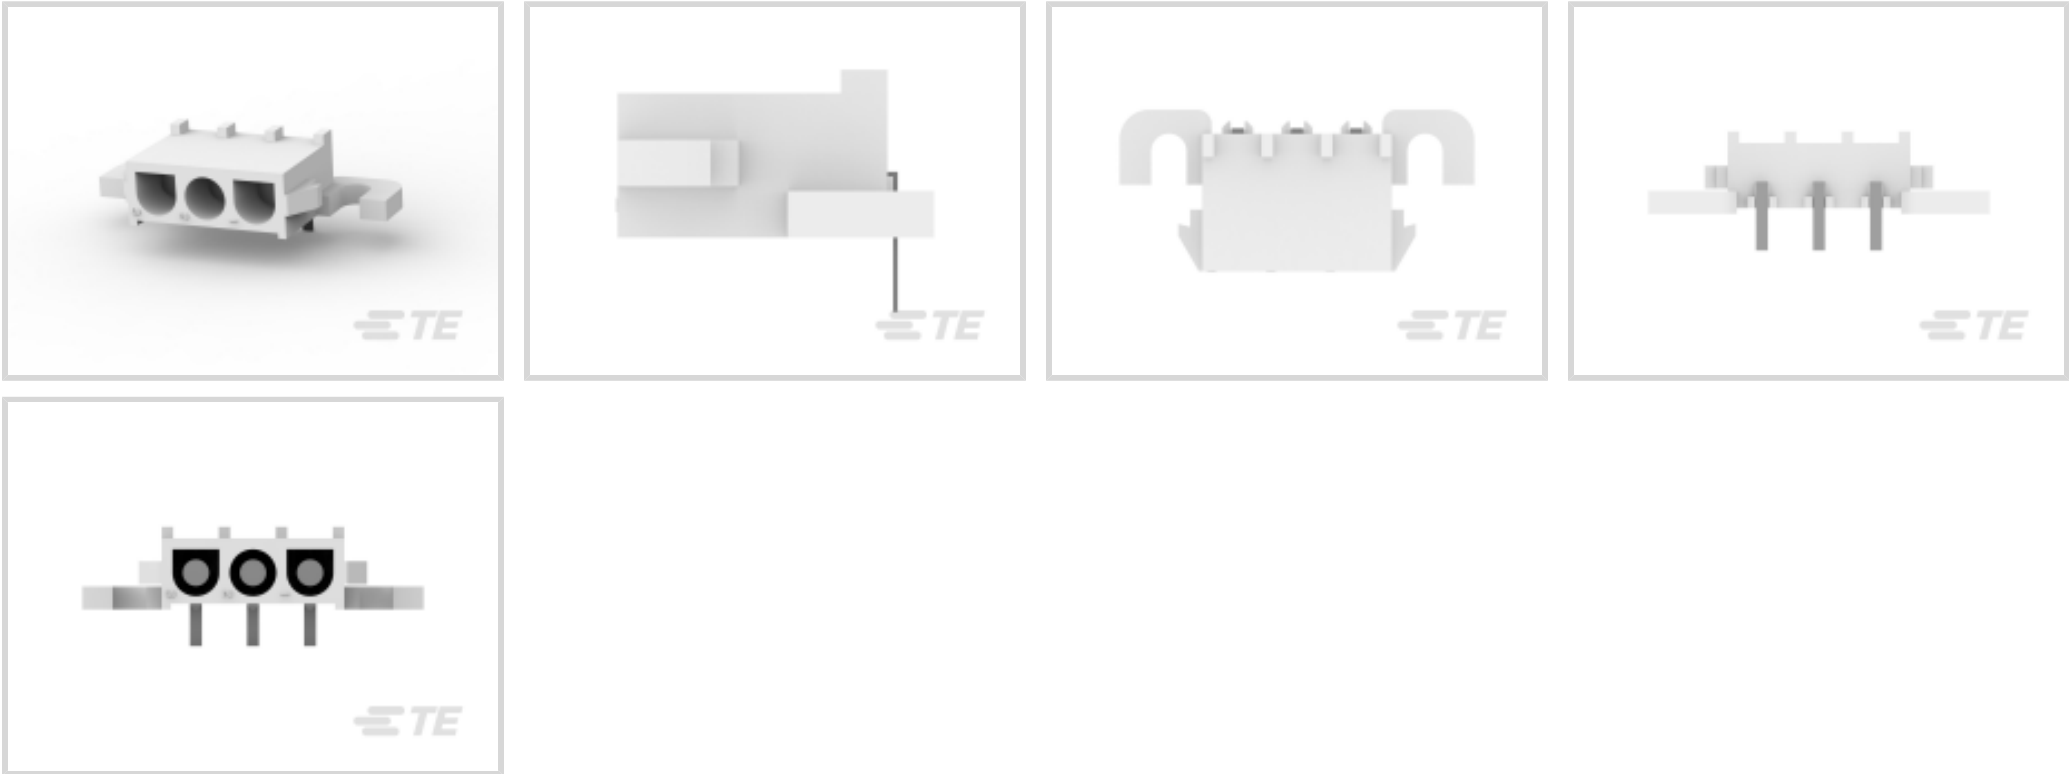




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **3**

Centerline (Pitch): **6.35 mm [.25 in]**

Features

Product Type Features

Rectangular Power Connector Type	Header
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	3
PCB Mount Orientation	Right Angle
Number of Power Positions	3
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features

Contact Layout	Inline
----------------	--------



Multiple Contact Types	Without
Contact Current Rating (Max)	12 A
Contact Retention Within Housing	Without
Contact Type	Socket
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	3.81 – 5.08 µm[150 – 200 µin]

Termination Features

Termination Post & Tail Length	3.7 mm[.146 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

Strain Relief	Without
Mating Alignment Type	Polarization
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	With
PCB Mount Retention Type	Mounting Hole
Connector Mounting Type	Board Mount
Mating Retention	With
Mating Retention Type	Positive Lock

Housing Features

Centerline (Pitch)	6.35 mm[.25 in]
Housing Color	Natural
Housing Material	Nylon

Dimensions

PCB Thickness (Recommended)	3.18 mm[.125 in]
-----------------------------	------------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Assembly Integration Feature	Without
Circuit Application	Power



Industry Standards

CSA Rating	Certified
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard Number	E28476
Agency/Standard	CSA, UL
UL Rating	Recognized
CSA File Number	LR7189
VDE Tested	Yes

Packaging Features

Packaging Method	Box
Packaging Quantity	280

Other

For Use With	Mates with Plug Housing (Using Pin Contacts)
--------------	--

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

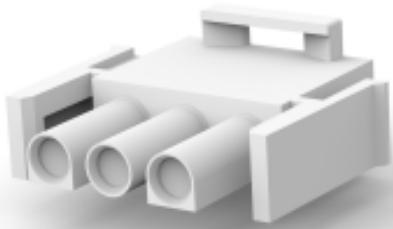





Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 770018-1 03P UMNLI IN-LNE PLUG HSG KIT	 TE Part # 350766-1 03P UMNL PLUG HSG	 TE Part # 1586849-1 03P UMNL CAP HSG NATL, GW	 TE Part # 794900-1 03P UMNL HI TEMP CAP HSG
 TE Part # 1969797-1 02P UMNL HDR ASSY R/A, SCKT V0 GW	 TE Part # 641945-1 03P UMNL STR/REL	 TE Part # 641763-1 03P UMNL STR/REL V2 NATL	 TE Part # 1-350589-0 STR/REL CLAMP NATL
 TE Part # 640714-1 03P UMNL STR/REL	 TE Part # 794271-1 03P UMNL INTERFACE SEAL	 TE Part # 1-640720-0 03P UMNL STR/REL & INSRT NATL	 TE Part # 794272-1 03P UMNL WIRE SEAL
 TE Part # 1586893-3 03P UMNL HDR ASSY R/A, GW	 TE Part # 1969813-1 06P UMNL HDR ASSY R/A, SCKT V0 GW	 TE Part # 1586892-3 03P UMNL HDR ASSY R/A, GW V0	 TE Part # 1586378-1 03P UMNL CAP HSG NATL



TE Part # 1969806-1
04P UMNL HDR ASSY R/A, SCKT V0
GW

TE Part # 1969816-1
08P UMNL HDR ASSY R/A, SCKT V0
GW

TE Part # 1586892-1
03P UMNL HDR ASSY R/A, GW

TE Part # 1586893-1
03P UMNL HDR ASSY R/A, GW

Also in the Series | Universal MATE-N-LOK

Circular Power Connectors(2)

Connector Contacts(11)

Insertion & Extraction Tools(4)

Power Contacts(207)

Rectangular Boots & Strain Relief(35)

Rectangular Connector Adapters(7)

Rectangular Connector Hardware(1)

Rectangular Connector Housings(2)

Rectangular Connector Keying Plugs(3)

Rectangular Connector Locking(4)

Rectangular Connector Seals(26)

Rectangular Power Connectors(729)

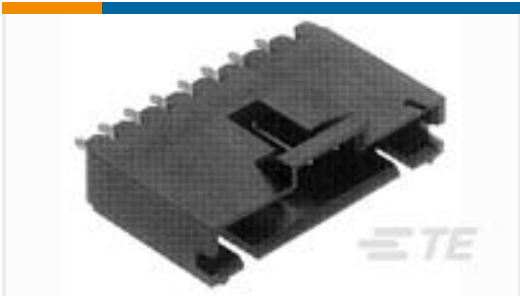
Customers Also Bought

TE Part #5745414-7
50 PLUG SP/MS STD

TE Part #643424-1
06P UMNL HDR ASSY POL 94VO

TE Part #1-1761185-1
4 SDL SE GRND RCPT ASSY

TE Part #2-1614884-4
CPF 0805 20R 0.1% 25PPM 1K RL




TE Part #2-103639-5
02 MTE HDR SRST LATCH .100CL



TE Part #2-1761679-9
IDC LOW PRO HDR 26P VERT BLUE



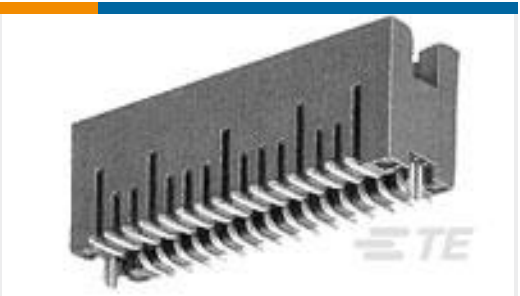TE Part #5-103080-3
05 MODII HDR SRST SHRD .100CL



TE Part #5-104656-5
50 50/50 HDR DRST SFMNT .320 SN



TE Part #6-1825011-2
ASF62G04=6PDT AUTOSLIDE



TE Part #4-2176364-6
RQ 0402 13K7 0.1% 10PPM 5K RL

Documents

Product Drawings

03P UMNL HDR ASSY R/A 94VO

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_643228-1_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_643228-1_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_643228-1_H.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_643228-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_643228-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_643228-1_D.3d_stp.zip

English



By downloading the CAD file I accept and agree to the Terms and Conditions of use.	
Datasheets & Catalog Pages SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY English	
Product Specifications Application Specification English	
Product Environmental Compliance MD_643228-1_09252018645_dmtec English MD_643228-1_09252018645_dmtec English	
Instruction Sheets Instruction Sheet (U.S.) English	
Agency Approvals CSA Certificate English	