

AMP | AMP Type III+

TE Internal #: 66104-2

Power Contacts, Contact, Tin-Lead, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket, AMP

Type III+

View on TE.com >



Connectors > Power Connectors > Power Contacts











Power Contact Type: Contact

Contact Mating Area Plating Material: Tin-Lead

Wire Size: .2 – .6 mm²

Connector & Contact Terminates To: Wire & Cable

Features

Product Type Features

| Power Contact Type | Contact |
|-------------------------------------------------------|------------------|
| Connector & Contact Terminates To | Wire & Cable |
| Electrical Characteristics | |
| Test Current | 13 A |
| Contact Features | |
| Contact Mating Area Plating Material | Tin-Lead |
| Contact Current Rating (Max) | 13 A |
| Contact Type | Socket |
| Contact Retention Within Housing | With |
| Mating Pin Diameter | 1.57 mm[.062 in] |
| Contact Base Material | Brass |
| Contact Mating Area Plating Material Thickness | 2.54 μm[100 μin] |
| Wire Contact Termination Area Plating Thickness | 2.54 μm[100 μin] |
| Wire Contact Termination Area Plating Material | Tin-Lead |
| Wire Contact Termination Area Plating Material Finish | Bright |



| Contact Orientation | Straight |
|-----------------------------------------|-----------------------------------------------------------------------------------------|
| Contact Underplating Material | Nickel |
| Contact Underplating Material Thickness | .76 μm[30 μin] |
| Contact Size | 16 |
| Termination Features | |
| Termination Method to Wire & Cable | Crimp |
| Mechanical Attachment | |
| Wire Insulation Support | With |
| Dimensions | |
| Wire Size | .2 – .6 mm² |
| Accepts Wire Insulation Diameter Range | 1.02 – 2.03 mm[.04 – .08 in] |
| Usage Conditions | |
| Operating Temperature Range | -55 – 90 °C[-67 – 194 °F] |
| Operation/Application | |
| Circuit Application | Power & Signal |
| Packaging Features | |
| Packaging Method | Reel |
| Packaging Quantity | 4000 |
| Other | |
| Wire/Cable Type | Discrete Wire |
| For Use With | CPC Connectors |
| Comment | Overall insulation crimp diameter, including crimp barrel, must not exceed 3.18 [.125]. |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Not Compliant |
|-----------------------------------------------|----------------------------------------------|
| EU ELV Directive 2000/53/EC | Not Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) |



Candidate List Declared Against: JAN 2022 (223)

SVHC > Threshold:

Pb (13% in Component Part)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per |
|-----------------|------------------------------------------|
| | homogenous material. Also BFR/CFR/PVC |
| | Free |

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts














Also in the Series | AMP Type III+



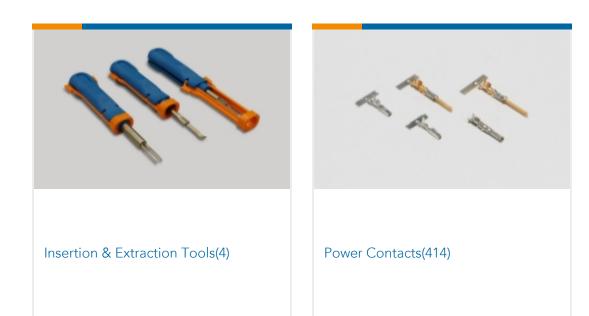

Customers Also Bought





















Documents

Product Drawings

III+ SKT,24-20,TIN-LEAD,STRIP

English

CAD Files

Customer View Model

ENG_CVM_CVM_66104-2_BT.2d_dxf.zip

English

3D PDF

Power Contacts, Contact, Tin-Lead, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket, AMP Type III+



3D

Customer View Model

ENG_CVM_CVM_66104-2_BT.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66104-2_BT.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Instruction Sheets

Instruction Sheet (U.S.)

Japanese

Instruction Sheet (U.S.)

English