
# 66106-3 - ACTIVE

### AMP | AMP Type III+

TE Internal #: 66106-3 Power Contacts, Contact, Gold, 26 – 24 AWG Wire Size, .12 – .2 mm<sup>2</sup> Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+

#### View on TE.com >

#### Connectors > Power Connectors > Power Contacts

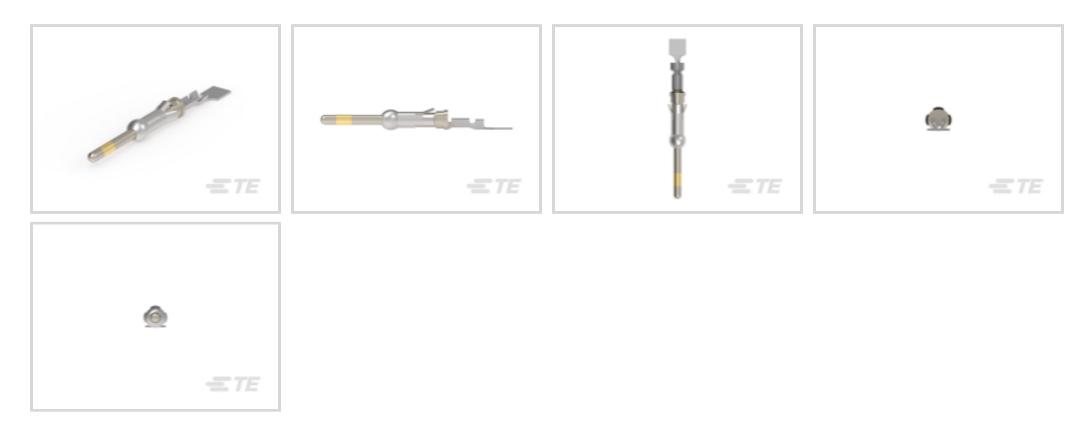

Power Contact Type: Contact

Contact Mating Area Plating Material: Gold

Wire Size: .12 – .2 mm<sup>2</sup>

Connector & Contact Terminates To: Wire & Cable

### Features

#### **Product Type Features**



rioduct Type Teatures	
Power Contact Type	Contact
Connector & Contact Terminates To	Wire & Cable
Electrical Characteristics	
Test Current	13 A
Contact Features	
Contact Shape & Form	Round
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	13 A
Contact Type	Pin
Contact Retention Within Housing	With
Mating Pin Diameter	1.57 mm[.062 in]
Contact Base Material	Brass
Contact Mating Area Plating Material Thickness	.38 µm[15 µin]
Wire Contact Termination Area Plating Thickness	1.27 μm[50 μin]
Wire Contact Termination Area Plating Material	Tin

Power Contacts, Contact, Gold, 26 – 24 AWG Wire Size, .12 – .2 mm<sup>2</sup> Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+



Wire Contact Termination Area Plating Material Finish	Matte
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Size	16
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	.12 – .2 mm²
Accepts Wire Insulation Diameter Range	.89 – 1.4 mm[.035 – .055 in]
Usage Conditions	
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
Operation/Application	
Circuit Application	Power & Signal

## Industry Standards

Agency/Standard	CSA
UL File Number	E28476
Packaging Features	
Packaging Method	Reel
Packaging Quantity	4000
Other	
Wire/Cable Type	Discrete Wire
For Use With	CPC Connectors
Comment	Overall insulation crimp diameter, including crimp barrel, must not exceed 3.18 [.125].

# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant

Power Contacts, Contact, Gold, 26 – 24 AWG Wire Size, .12 – .2 mm<sup>2</sup> Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+




EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

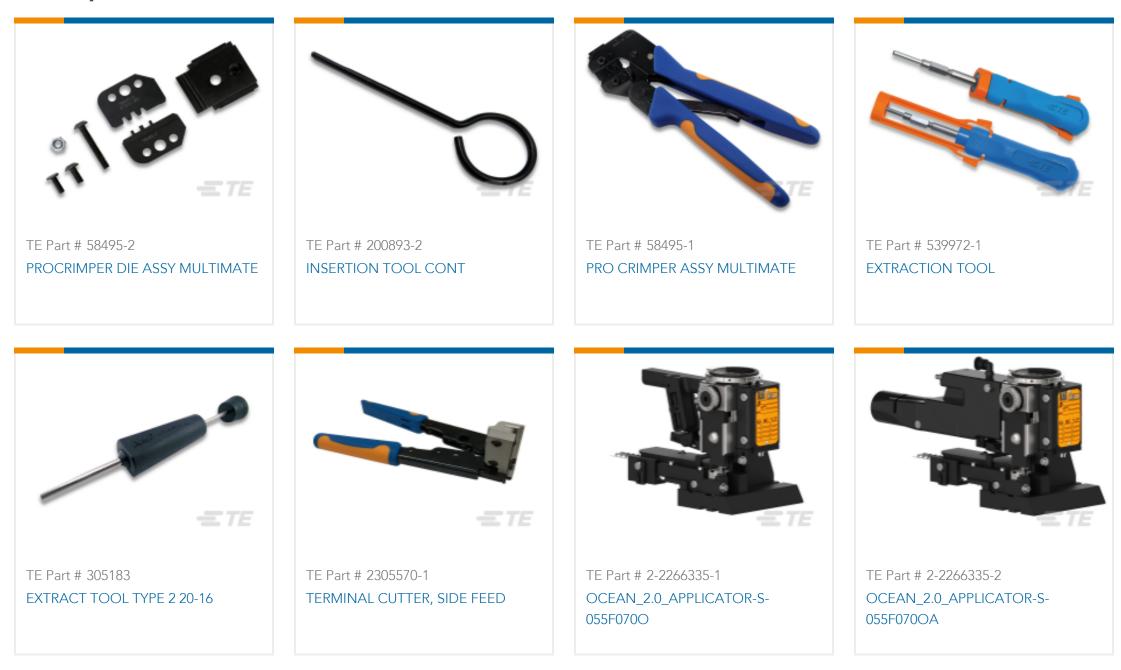


Power Contacts, Contact, Gold, 26 – 24 AWG Wire Size, .12 – .2 mm<sup>2</sup> Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+





TE Part # 2266335-2 OCEAN\_2.0\_APPLICATOR-S-055F070OA

# Also in the Series | AMP Type III+

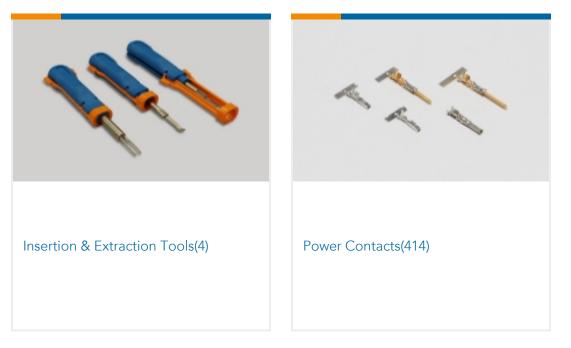

# Customers Also Bought







Power Contacts, Contact, Gold, 26 – 24 AWG Wire Size, .12 – .2 mm<sup>2</sup> Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+



### Documents

Product Drawings III+ PIN,26-24,15AU/FL,STRIP

English

#### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_66106-3\_AS.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_66106-3\_AS.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_66106-3\_AS.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

#### **Product Environmental Compliance**

**Product Compliance** 

English

**Product Compliance** 

English

Instruction Sheets Instruction Sheet (U.S.) Japanese

Instruction Sheet (U.S.)

English