647676-5 - ACTIVE

Economy Power

TE Internal #: 647676-5 Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, .156 in [3.96 mm] Centerline, Printed Circuit Board, UL 94V-0, Economy Power

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: Header Connector & Housing Type: Plug Connector System: Wire-to-Board

Number of Positions: 5

Centerline (Pitch): 3.96 mm [.156 in]

Features

E T E Connectivity

Product Type Features

Header Type	Partially Shrouded			
Rectangular Power Connector Type	Header			
Connector & Housing Type	Plug			
Connector System	Wire-to-Board			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
Configuration Features				
Number of Positions	5			
Number of Positions PCB Mount Orientation	5 Right Angle, Vertical			
PCB Mount Orientation	Right Angle, Vertical			
PCB Mount Orientation Number of Power Positions	Right Angle, Vertical			
PCB Mount Orientation Number of Power Positions Number of Rows	Right Angle, Vertical			

C For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, .156 in [3.96 mm] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



Connector Profile	Low				
Contact Features					
Contact Layout	Inline				
Contact Base Material	Brass				
Contact Current Rating (Max)	7.5 A Without				
Contact Retention Within Housing					
Contact Type	Pin				
PCB Contact Termination Area Plating Material	Tin				
Contact Mating Area Plating Material	Tin				
Contact Mating Area Plating Material Thickness	2.03 μm[80 μin]				
Termination Features					
Termination Post & Tail Length	5.34 mm[.21 in]				
Termination Method to Printed Circuit Board	Through Hole - Solder				
Mechanical Attachment					
Mating Alignment	With				
PCB Mount Alignment	Without				
PCB Mount Retention	Without				
Connector Mounting Type	Board Mount				
Mating Retention	With				
Mating Retention Type	Latch				
Housing Features					
Centerline (Pitch)	3.96 mm[.156 in]				
Housing Color	White				
Housing Material	Nylon 66				
Dimensions					
Mating Post Length	8.6 mm[.33 in]				
Height	9.4 mm[.37 in]				
Length	19.8 mm[.78 in]				
Width	15.37 mm[.605 in]				
Usage Conditions					
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]				

C For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, .156 in [3.96 mm] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



Circuit Application	Power				
ndustry Standards					
UL Flammability Rating	UL 94V-0				
Glow Wire Rating	Standard Part - Not Glow Wire				
Packaging Features					
Packaging Method	Bag				
Packaging Quantity	1000				
Other					
For Use With	Plug Housing				
Product Compliance For compliance documentation, visit the product page on TE.com>					
EU RoHS Directive 2011/65/EU	Compliant				
EU ELV Directive 2000/53/EC	Compliant				
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold				
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022				

(223) SVHC > Threshold: Not Yet Reviewed

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


C For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, .156 in [3.96 mm] Centerline, Printed Circuit Board, UL 94V-0, Economy Power






Also in the Series | Economy Power

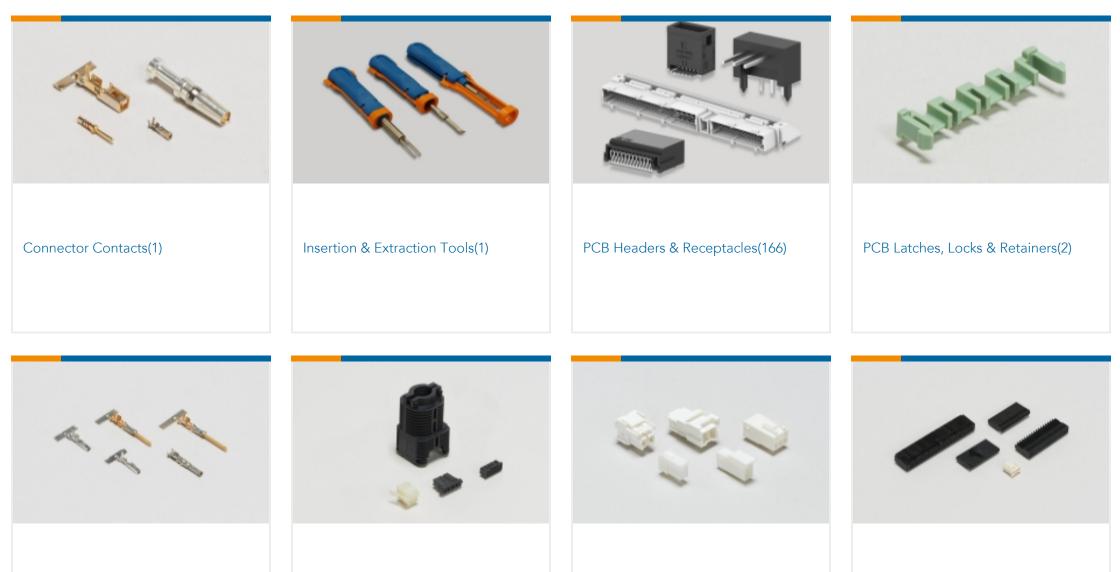

Power Contacts(8)	Rectangular Connector Housings(1)	Rectangular Power Connectors(301)	Wire-to-Board Connector Assemblies
			& Housings(141)



Customers Also Bought



Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, .156 in [3.96 mm] Centerline, Printed Circuit Board, UL 94V-0, Economy Power





Documents

Product Drawings 3.96 EP HDR ASSY 5P R/A

English

CAD Files

Customer View Model ENG_CVM_CVM_647676-5_B.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_647676-5_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_647676-5_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages MTA, CST-100 II, SL-156 and AMP Economy Power (EP) Connectors

English

1-1773885-9 Economy Power Connectors

English

Product Specifications

Application Specification

English

Application Specification

Japanese

Product Environmental Compliance

TE Material Declaration

English

Agency Approvals VDE Certificate

& For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, .156 in [3.96 mm] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



English