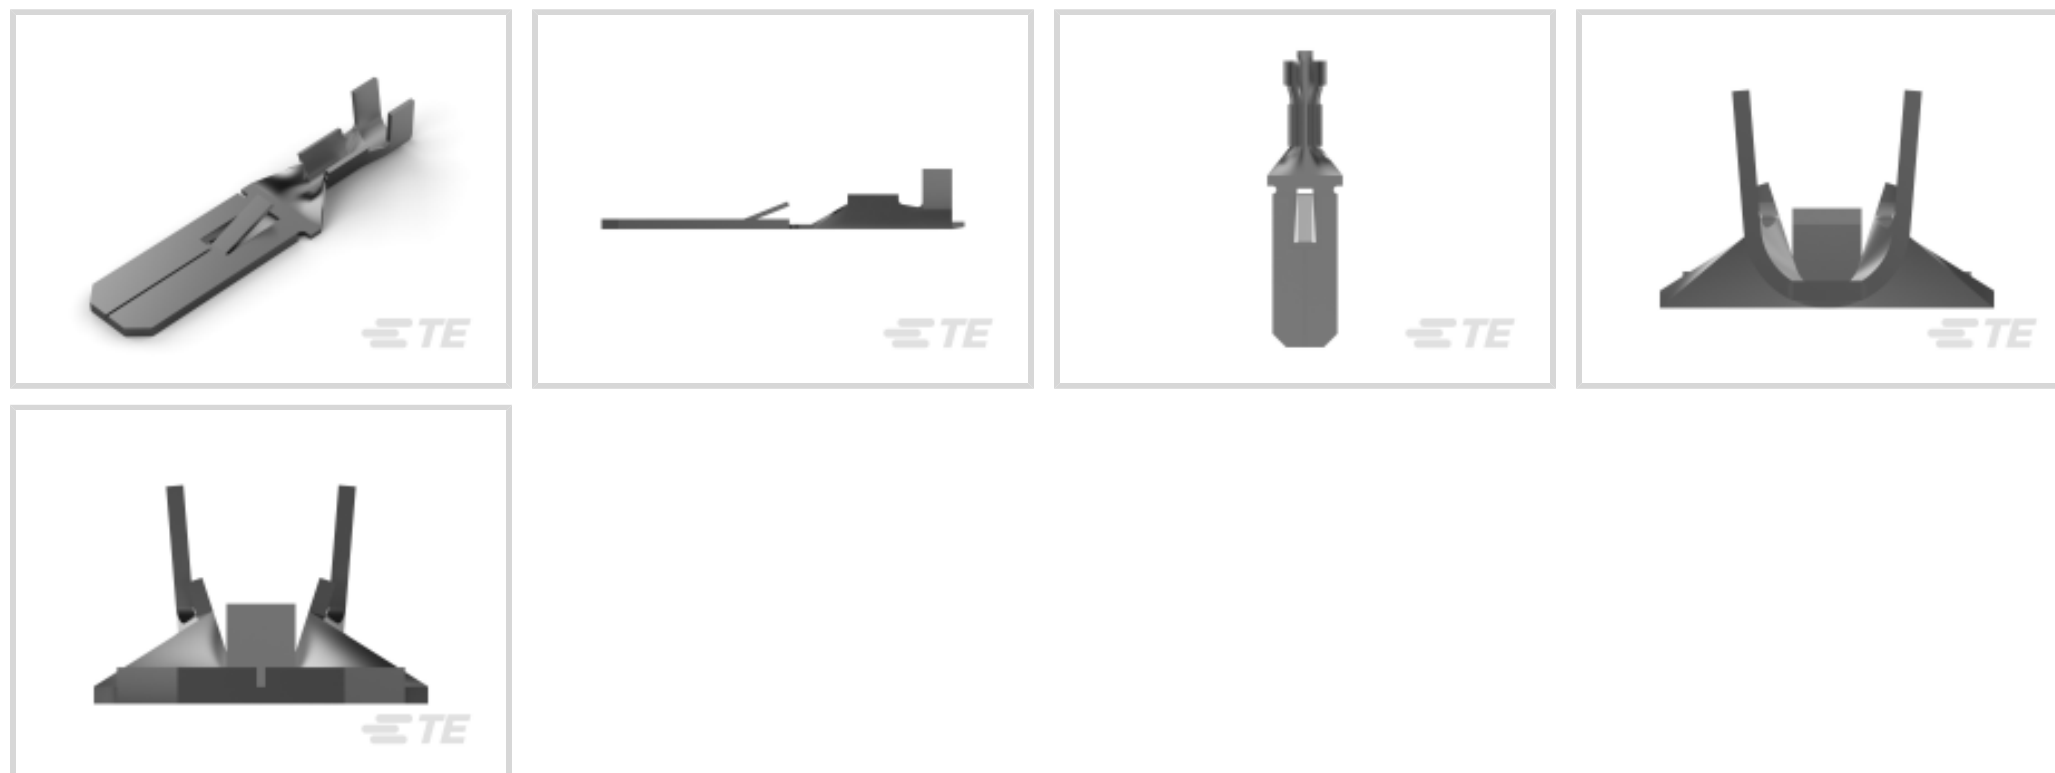




Terminals & Splices > Quick Disconnects

Quick Disconnect Terminal Type: **Tab**Wire Size: .32 – .82 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Terminates To	Wire & Cable
Wire/Cable Type	Regular Wire
Insertion Force	Normal
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open



Mechanical Attachment

	.055 in
Mating Retention Type	Locking Lance
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	2.2 – 3 mm [.086 – .118 in]
Overall Length	28.12 mm [1.107 in]
Receptacle Terminal Stock Thickness	.4 mm [.015 in]
Wire Size	.32 – .82 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Packaging Features

Packaging Quantity	9000
Packaging Method	Strip/Reel

Other

Comment	"According to DIN, except Wire Size Range", Without Locking Hole
---------	--

Product Compliance








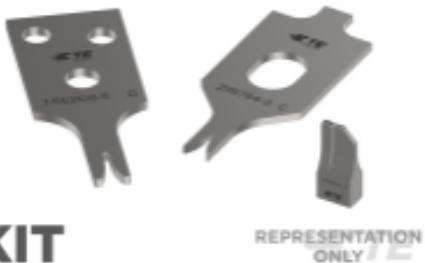


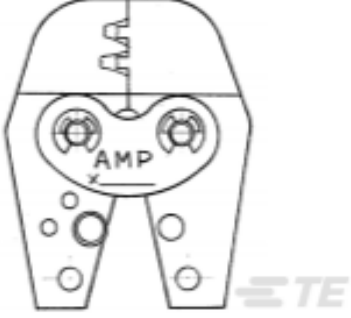
[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 1-1579007-4 EXTRACTION TOOL</p>	 <p>TE Part # 4-1579007-3 EXTRACTION TOOL KIT</p>	 <p>TE Part # 880636-2 FF 250 TAB 1.0-2.5 MM2 0.39 X 13.2 TPBR</p>	 <p>TE Part # 91514-1 CCII FASTON 250 REC 22-18 ASSY TPBR</p>
 <p>TE Part # 2-2150037-2 OCEAN_2.0_APPLICATOR-E-090F140F</p>	 <p>TE Part # 2150037-2 OCEAN_2.0_APPLICATOR-E-090F140F</p>	 <p>TE Part # 7-2150037-2 OCEAN_2.0_APPLICATOR-E-090F140F</p>	 <p>KIT REPRESENTATION ONLY</p> <p>TE Part # 7-2150037-7 OCEAN_2.0_SPARE_PART_KIT-090F140F</p>
 <p>TE Part # 880638-2 .110 SERIES FASTIN-</p>	 <p>TE Part # 880688-2 FF 250 TERMINAL 0.5-1.0MM2 0.39 X13.2TPBR</p>	 <p>TE Part # 752856-1 DIES 90166-1</p>	

Also in the Series | **FASTIN-FASTON 250**



Crimp Terminal Housings(218)



Insertion & Extraction Tools(2)

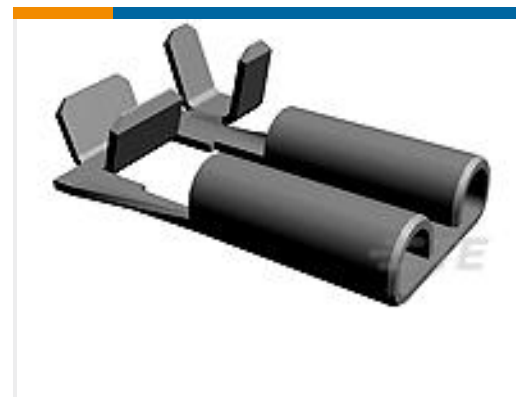
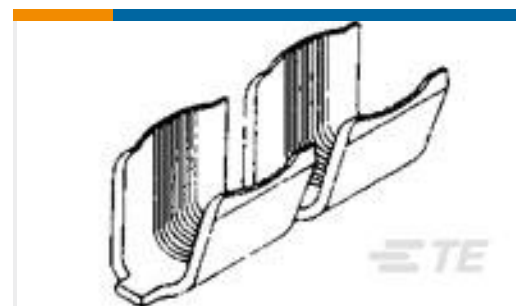
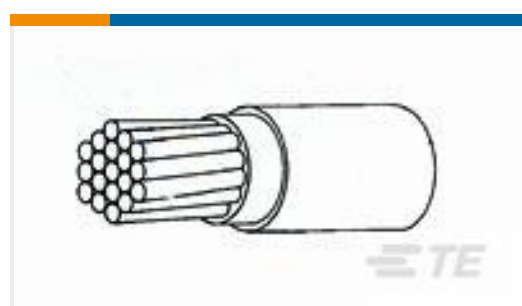


PCB Terminals(2)



Quick Disconnects(255)

Customers Also Bought

TE Part #1-967584-1
4POS MQS TAB SEALED COD ATE Part #207446-3
SEALING CAP ASSY,SZ 23,CPCTE Part #1742086-2
187 FASTON,FLAG,REC.,18-22 AWG,
TPBRTE Part #5053044060
RNF-100-3/16-0-SPTE Part #5052994073
RNF-100-1/8-0-SPTE Part #160631-3
SUB MINIATURE AMPLIVAR SPLICETE Part #280002-1
AMPLIVAR SPLICETE Part #825437-3
MOD 2 PINHDR 1X03P.TE Part #CD21303001
44A0111-24-OCK2000

Documents

Product Drawings

FF 250 TAB 22-18 AWG .032 TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_60294-2_CS_c-60294-2-cs.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_60294-2_CS_c-60294-2-cs.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_60294-2_CS_c-60294-2-cs.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[Product Compliance](#)

English

[Product Compliance](#)

English

Agency Approvals

[Agency Approval Document](#)

English