

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0643241019**  
**Status:** **Active**  
**Overview:** CMC and CMX Sealed, Hybrid, Modular Connectors  
**Description:** 2.80mm, CMC CP Female Terminal, Tin plated, for Tab Dimensions 2.80mm by 0.80mm, Wire Size > 3.00-5.00mm<sup>2</sup>

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-64324-001-CH-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification AS-64324-001-FR-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Application Specification AS-98420-001-001 (PDF)</a>
<a href="#">Product Specification PS-64326-001-001 (PDF)</a>	<a href="#">Application Specification AS-98420-001-CH-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-001 (PDF)</a>	<a href="#">Application Specification AS-98420-001-FR-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-CH-001 (PDF)</a>	<a href="#">Application Specification AS-98420-001-SP-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-FR-001 (PDF)</a>	<a href="#">Packaging Specification 313025040-000 (PDF)</a>
<a href="#">Application Specification AS-64318-002-SP-001 (PDF)</a>	<a href="#">Packaging Specification PK-98910-001-001 (PDF)</a>
<a href="#">Application Specification AS-64324-001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**General**

Product Family	Crimp Terminals
Series	64324
Application	Automotive, Power, Wire-to-Wire
Comments	* Current tested on a fully loaded connector, current for temperature increase of 40°C. Current max = 21A for 2.80mm Terminal (5.00mm <sup>2</sup> wire)*
Crimp Quality Equipment	Yes
Overview	<a href="#">CMC and CMX Sealed, Hybrid, Modular Connectors</a>
Product Name	CMC, CP Terminal
UPC	883906127893

**Physical**

Gender	Female
Material - Metal	High Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	1.150/g
Packaging Type	Reel
Plating min - Mating	1.016µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	3.40-4.00mm
Wire Size AWG	10, 12
Wire Size mm <sup>2</sup>	>3.00-5.00


**Electrical**

Current - Maximum per Contact	21.0A
Voltage - Maximum	14V DC

**Solder Process Data**

Lead-free Process Capability	N/A
------------------------------	-----

**Material Info**

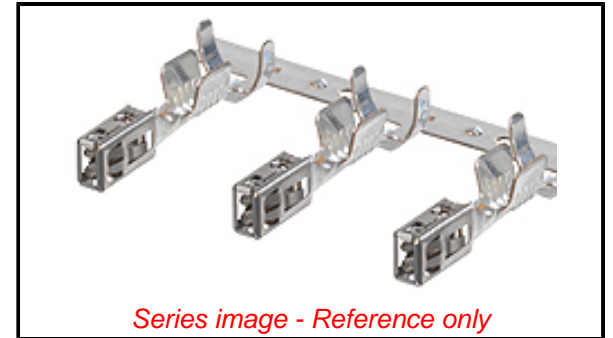

**EU ELV**

**Compliant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)4578-DC (25  
June 2020)

**Halogen-Free**

**Status**

**Not Relevant**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Not Relevant

Compliant

Not Contained

**Search Parts in this Series**

64324 Series

**Mates With**

CMC Connector [64318](#) , [64321](#) , [64326](#) ,  
[643251196](#)

**Use With**

CMC Connector [64318](#) , [64321](#) , [64326](#) ,  
[643251196](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

Hand Crimp  
Tool for CP 2.8  
Receptacle 12-10  
AWG Type TXL Wire  
and>3.00-5.00mm<sup>2</sup>  
Type ID & ID Wire  
with 2.80mm<sup>2</sup>,

[638119900](#)

**Reference - Drawing Numbers**

Application Specification

Crimp Specification

Packaging Specification

Product Specification

Sales Drawing

AS-64318-002-001, AS-64318-002-CH-001,  
AS-64318-002-FR-001, AS-64318-002-SP-001,  
AS-64324-001-001, AS-64324-001-CH-001,  
AS-64324-001-FR-001, AS-98420-001-001,  
AS-98420-001-CH-001, AS-98420-001-FR-001,  
AS-98420-001-SP-001  
CS-64324-001  
313025040-000, PK-98910-001-001  
PS-64326-001-001  
SD-64324-001-001

CMC Wire Seal

Receptacle

Extraction Tool [638132500](#)

Hand Crimp Tool for [638234100](#)

CP 2.8 Receptacle

Crimp Terminals

Mini-Mac Applicator [638950900](#)

for CP2.8 Crimp

Terminals 3.00 -

5.0mm<sup>2</sup> type ID & IR

Wire

This document was generated on 07/17/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**