66255-2 - ACTIVE

#### AMP

TE Internal #: 66255-2 Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm<sup>2</sup> / 2 – 3 mm<sup>2</sup> Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Tab

View on TE.com >

Connectors > Power Connectors > Power Contacts



Power Contact Type: **Contact** Contact Mating Area Plating Material: **Gold** Wire Size: **1.25 – 1.4 mm<sup>2</sup>, 2 – 3 mm<sup>2</sup>** 

Connector System: Wire-to-Wire

# Features

## Product Type Features

Power Contact Type	Contact
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

# **E**

## **Electrical Characteristics**

35 A

## **Contact Features**

Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	35 A
Contact Type	Tab
Mating Tab Width	5.84 mm[.23 in]
Mating Tab Thickness	2.67 mm[.105 in]
Contact Base Material	Copper
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Material	Gold
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Right Angle
Contact Underplating Material	Copper

**Termination Features** 

Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm² / 2 – 3 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Tab



Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	1.25 – 1.4 mm², 2 – 3 mm²
Accepts Wire Insulation Diameter Range	3.43 – 4.06 mm[.135 – .16 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Method	Reel
Packaging Quantity	1500
Other	
Wire/Cable Type	Discrete Wire
For Use With	CPC Connectors, G Series Connectors, M Series Connectors

# Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed	
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.	
Solder Process Capability	Not applicable for solder process capability	
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and based on the information they provided. This information is subject to change		

Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm<sup>2</sup> / 2 – 3 mm<sup>2</sup> Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Tab



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

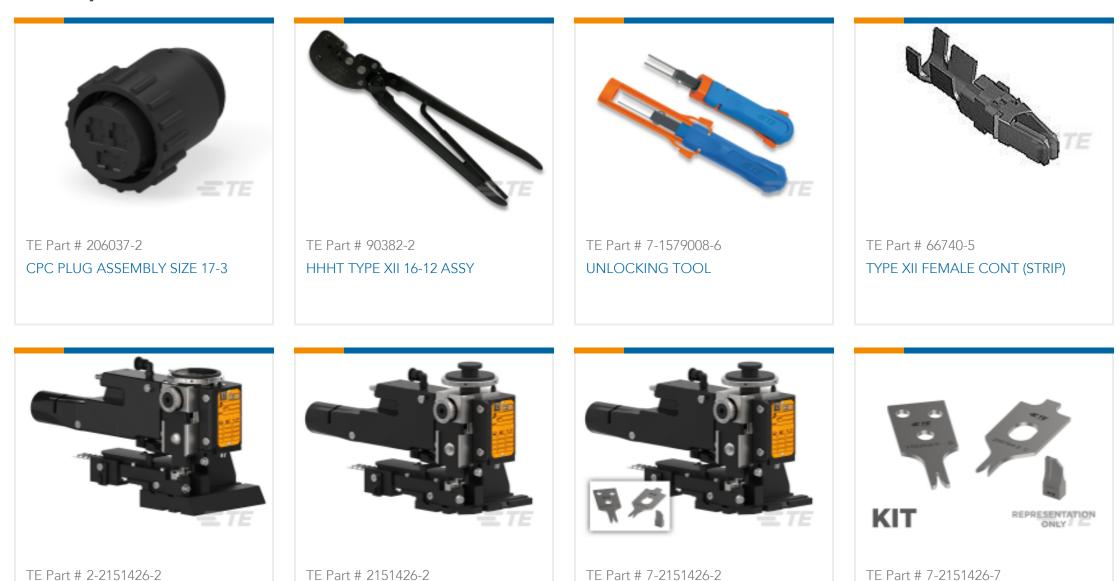

OCEAN_2.0_APPLICATOR-S- 140F210O	OCEAN_2.0_APPLICATOR-S- 140F210O	OCEAN_2.0_APPLICATOR-S- 140F210O	OCEAN_2.0_SPARE_PART_KIT- 140F210O	
<u>i</u>				
TE Part # 539668-2				

MATRIZE TYPE 3+

# Customers Also Bought



Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm<sup>2</sup> / 2 – 3 mm<sup>2</sup> Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Tab





# Documents

# Product Drawings MALE CONTACT ASSY. (STRIP)

English

## **CAD** Files

Customer View Model ENG\_CVM\_CVM\_66255-2\_AE.2d\_dxf.zip

English

## 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_66255-2\_AE.3d\_igs.zip

English

Customer View Model

## ENG\_CVM\_CVM\_66255-2\_AE.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Datasheets & Catalog Pages** 

AMP Circular Connectors for Commercial Signal & Power Applications

English

**Power Contacts** 

English

M\_SERIES\_PIN\_AND\_SOCKET\_CONNECTORS

English

Products for Aerospace and Defense

English

**Product Specifications** 

**Application Specification** 

English

**Product Environmental Compliance** 

Product Compliance

English

**Product Compliance** 

**S** For support call+1 800 522 6752

Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm² / 2 – 3 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Tab



English