## 66256-4 - ACTIVE

#### AMP

TE Internal #: 66256-4 Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm<sup>2</sup> / 2 – 3 mm<sup>2</sup> Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power & Signal

View on TE.com >

Connectors > Power Connectors > Power Contacts



Power Contact Type: **Contact** Contact Mating Area Plating Material: **Gold** Wire Size: **1.25 – 1.4 mm<sup>2</sup>, 2 – 3 mm<sup>2</sup>** 

Connector System: Wire-to-Wire

### Features

#### Product Type Features

Power Contact Type	Contact
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

# ennectivity

#### **Electrical Characteristics**

Test (	Current

35 A

#### **Contact Features**

Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	35 A
Contact Type	Tab
Mating Tab Width	5.84 mm[.23 in]
Mating Tab Thickness	2.67 mm[.105 in]
Contact Base Material	Copper
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Material	Gold
Wire Contact Termination Area Plating Material Finish	Matte
Contact Orientation	Right Angle
Contact Underplating Material	Copper

#### **Termination Features**

**C** For support call+1 800 522 6752

Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm<sup>2</sup> / 2 – 3 mm<sup>2</sup> Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power & Signal



Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	1.25 – 1.4 mm², 2 – 3 mm²
Accepts Wire Insulation Diameter Range	3.43 – 4.06 mm[.135 – .16 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Method	Reel
Packaging Quantity	1500
Other	
Wire/Cable Type	Discrete Wire
For Use With	CPC Connectors, G Series Connectors, M Series Connectors

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive	2011/65/EU
-------------------	------------

EU ELV Directive 2000/53/EC

China RoHS 2 Directive MIIT Order No 32, 2016

EU REACH Regulation (EC) No. 1907/2006

#### Halogen Content

Solder Process Capability

Compliant with Exemptions

Compliant

Restricted Materials Above Threshold

Current ECHA Candidate List: JUNE 2022

(224)

Candidate List Declared Against: JAN 2022

(223)

SVHC > Threshold:

Pb (.4% in BODY & NUT)

#### Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Not applicable for solder process capability


Product Compliance Disclaimer

Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm<sup>2</sup> / 2 – 3 mm<sup>2</sup> Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power & Signal




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

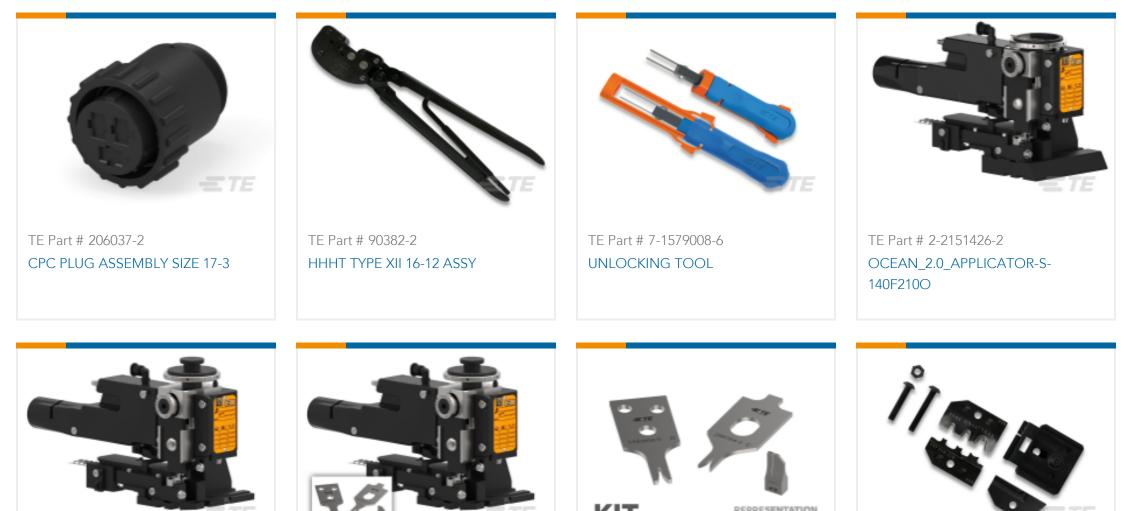

= IE		KII ONLY		TE	
TE Part # 2151426-2	TE Part # 7-2151426-2	TE Part # 7-2151426-7	TE Part # 539668-2		
OCEAN_2.0_APPLICATOR-S-	OCEAN_2.0_APPLICATOR-S-	OCEAN_2.0_SPARE_PART_KIT-	MATRIZE TYPE 3+		
140F210O	140F210O	140F210O			

## Customers Also Bought

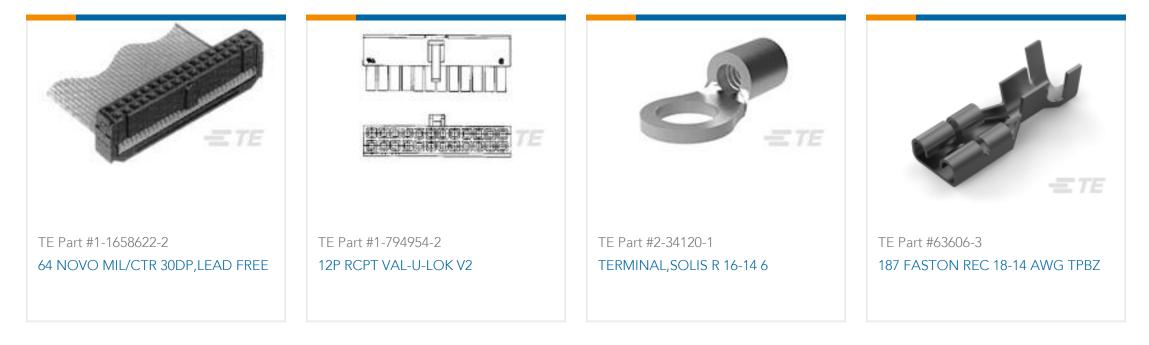

Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm<sup>2</sup> / 2 – 3 mm<sup>2</sup> Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power & Signal







TE Part #6-1393127-0 PRD-11DY0-110=PRD

### Documents

Product Drawings MALE CONTACT ASSY (STRIP)

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_66256-4\_AC.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_66256-4\_AC.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_66256-4\_AC.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

#### Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications

English

**Power Contacts** 

English

#### M\_SERIES\_PIN\_AND\_SOCKET\_CONNECTORS

English

Products for Aerospace and Defense

English

Power Contacts, Contact, Gold, 14 – 12 AWG / 16 AWG Wire Size, 1.25 – 1.4 mm² / 2 – 3 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power & Signal



Product Specifications Application Specification

English