


## RECTANGULAR POWER CONNECTORS



PRODUCT DRAWING

Ŧ

English

🛃 3D PDF

## TE CONNECTIVITY (TE) 02P MTA156 CONN ASSY 22AWG RED MTA | MTA156

643819-2 TE Internal Number: 643819-2

Not EU RoHS or ELV Compliant Find Compliant Alternatives Product Type Connector Assembly Housing Type Receptacle Connector System Wire-to-Post Applies To Wire/Cable Contact Current Rating (A) 7

Product Drawings	MTA 156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD PDF English
CAD Files	Customer View Model 2D_DXF.ZIP English
	3D PDF PDF 3D
	Customer View Model 3D_IGS.ZIP English
	Customer View Model 3D_STP.ZIP English
Catalog Pages/Data Sheets	MTA, CST-100 II, SL-156 And AMP Economy Power (EP) Connectors PDF English
Product Specifications	
Product Specification	Connector, MTA 156, Wire-To-Wire System
Application Specification	English MTA 156 Ribbon Cable Connector Assemblies (English And Spanish) PDF English
	MTA 156 Ribbon Cable Connector Assemblies (English And Spanish) TIF English
	MTA 156 Ribbon Cable Connector Assemblies (English And Spanish) PDF Japanese
	MTA 156 Ribbon Cable Connector Assemblies (English And Spanish) TIF Japanese

9 🖬 f v

## Product Environmental Compliance


TE Material Declaration


## MD\_643819-2\_062520131023\_dmtec PDF English

Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features	Product Type	Connector Assembly
	Housing Type	Receptacle
	Contact Type	Socket
Configuration Features	Number of Positions	2
	Centerline	3.96 mm [ .156 in ]
	Number of Rows	1
	Contact Layout	Inline
Electrical Characteristics	Contact Current Rating (A)	7
	Operating Voltage (VAC)	600
Contact Features	Contact Retention	With
	Contact Termination Area Plating Material	Tin-Lead
	Contact Mating Area Plating Material	Tin-Lead
	Contact Mating Area Plating Thickness	2.03 – 5.08 μm [ 80 – 200 μin ]
	Contact Base Material	Copper Alloy
	Contact Mating Area Plating Material Finish	Bright
	Contact Termination Area Plating Thickness	2.03 μm [ 80 μin ]
	Contact Retention Type	Locking Lance
ermination Features	Wire/Cable Size (AWG)	22
	Wire/Cable Size (mm²)	.3 – .4
	Termination Method to Wire/Cable	Insulation Displacement Crimp (IDC)
	Wire Type	Stranded
	Wire/Cable Type	Discrete Wire
Mechanical Attachment	Mating Alignment	With
	Mating Retention	With
	PCB Mount Retention	Without

	Mating Alignment Type	Polarizing Tab
	PCB Mount Alignment	Without
	Mating Retention Type	Locking Ramp
	Panel Mount Retention	Without
	Strain Relief	With
Housing Features	UL Flammability Rating	UL 94V-2
	Housing Color	White
	Housing Material	Nylon 6/6
	Cable Exit Angle	90°
	Housing Style	Standard Profile
	Wire/Cable Installation Type	Closed End
Dimensions	Accepts Wire Insulation Diameter Range	2.41 mm [ .095 in ]
	Height (mm)	9.02
	Length (mm)	7.92
Usage Conditions	Sealed Condition	Not Sealed
Operation/Application	Connector System	Wire-to-Post
	Applies To	Wire/Cable
	Operating Temperature	-55 – 105 °C [ -67 – 221 °F ]
	Circuit Application	Power
Industry Standards	CSA Rating	Certified
	Agency/Standard Number	E28476
	UL Rating	Recognized
	CSA File Number	LR7189
	Agency/Standard	CSA, UL
Packaging Features	Packaging Method	Bag/Box
	Packaging Quantity	500
	•	
Other	Backwall/Post Interruptions	Without
	For Use With	MTA .156 Header

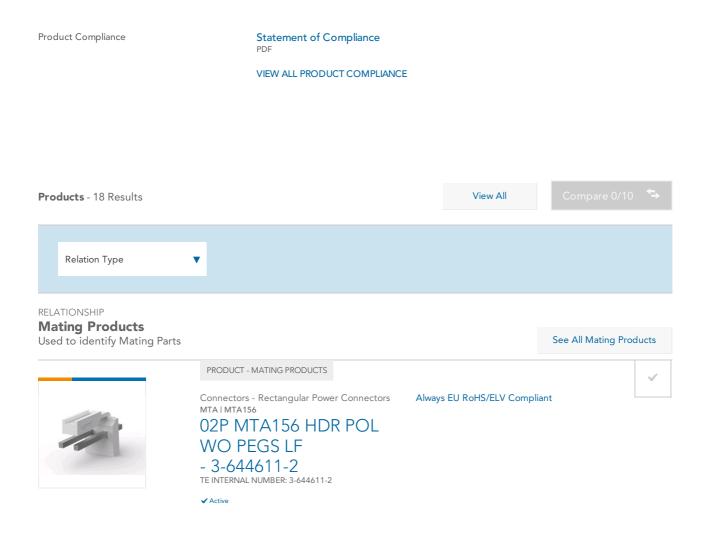

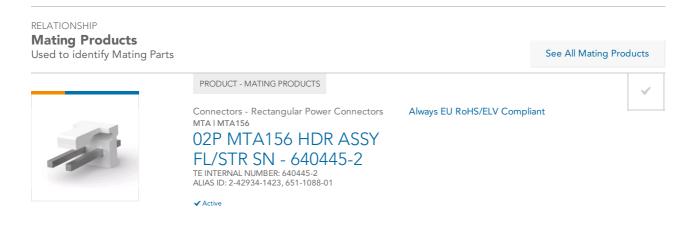

RELATIONSHIP **Mating Products** Used to identify Mating Parts



✓ Active