


DCK

1.5 mm female terminals

Features

- DCK technology
- Long box in CrNi
- 4 mm pitch for unsealed and sealed applications
- Single wire seal versions available
- Crimp code on terminal
- Suitable for secondary lock

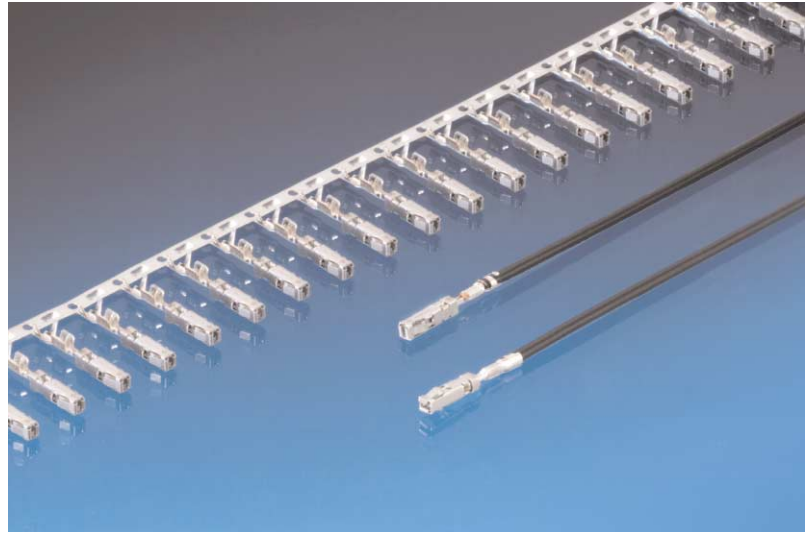

Performance characteristics*

- Contact resistance: < 3 m Ω
- Contact mating force: < 7 N
- Contact unmating force: < 4 N
- Current carrying capacity with 1.0 mm² wire:
 - at 23°C up to approx.: 15 A
 - at 85°C up to approx.: 12 A
 - at 100°C up to approx.: 10 A

* Mated with 1.5 x 0.6 mm DCS-2 male terminals (Sn)

Packing

- No. of terminals per reel: Consult us
- No. of reels per packing: Consult us

Tooling

- Manual crimping tool: Consult us
- Mini applicator: Consult us

Part Numbers	Type	Wire size range (in mm ²)		Insulation \varnothing (in mm) Max.	Material	Plating
		Min.	Max.			
6 000 19 11	Female	0.22	0.35	1.40	CuNiSi/CrNi	Sn
6 000 19 31	Female	0.50	1.00	2.10	CuNiSi/CrNi	Sn
6 000 20 11 (SWS)	Female	0.22	0.35	1.40	CuNiSi/CrNi	Sn
6 000 20 31 (SWS)	Female	0.50	1.00	2.10	CuNiSi/CrNi	Sn

SWS: Single Wire Seal