


## 60253-1 Product Details

Share | Print | Email

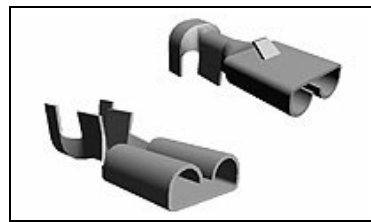

**60253-1**

TE Internal Number: 60253-1  
 Active

View 3D PDF

### Multiple Circuit Housings with Tabs & Receptacles

Always EU RoHS/ELV Compliant (Statement of Compliance)

**Product Highlights:**

- Contact
- Contact Type = Receptacle
- Mating Area Interface Dimensions = 6.35 x 0.81 mm
- Wire Range = (2) 1.25-1.40; [(2) 16] mm [AWG], 1.25-3.00<sup>2</sup> [16-12] mm [AWG]
- Insulation Diameter = (2) 3.30 [.130] Max. mm [in], 4.06-5.33 [.160-.210] mm [in]

[View all Features](#)

### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

### Documentation & Additional Information

**Product Drawings:**

- [RECEPTACLE, FASTIN- FASTON, .250 SERIES](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- None Available

**Product Specifications:**

- None Available

**Application Specifications:**

- [.110 .187, .250, .312, and .375 Series FASTIN-FASTON...](#) (PDF, English)

**Instruction Sheets:**

- None Available

**CAD Files: (CAD Format & Compression Information)**

- [2D Drawing](#) (DXF, Version BU)
- [3D Model](#) (IGES, Version BU)
- [3D Model](#) (STEP, Version BU)

[List all Documents](#)

**Related Products:**

- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

**Product Type Features:**

- [Product Type](#) = Contact
- [Receptacle Style](#) = Straight
- [Wire/Cable Type](#) = Regular Wire
- [Finish](#) = None
- [Insertion Force](#) = Normal
- [Insulation Support](#) = With
- FASTON = Yes

**Termination Features:**

- [Crimp Type](#) = F-Crimp

**Dimensions:**

- [Mating Area Interface Dimensions](#) (mm [in]) = 6.35 x 0.81 [.250 x .032]
- [Insulation Diameter](#) (mm [in]) = (2) 3.30 [.130] Max., 4.06-5.33 [.160-.210]

**Body Features:**

- [Wire Range](#) (mm [AWG]) = (2) 1.25-1.40; [(2) 16], 1.25-3.00<sup>2</sup> [16-12]
- [Material](#) = Brass
- [Stock Thickness](#) (mm [in]) = 0.30 [0.012]

**Contact Features:**

- [Contact Type](#) = Receptacle

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant
- [UL Rating](#) = Recognized
- [CSA Certified](#) = Yes

**Conditions for Usage:**

- [For Housing Type](#) = Multiple

**Packaging Features:**

- [Packaging Method](#) = Strip

**Other:**

- [Line](#) = FASTIN-FASTON .250
- [Brand](#) = AMP

Feedback

[About TE](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)  
[Terms & Conditions](#)  
[Privacy Policy](#)  
[AODA Accessibility Policy](#)  
[AODA Multi-Year Accessibility Plan](#)

[Distributor Inventory](#)  
[Product Cross Reference](#)  
[Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

[Email or Chat With Us](#)  
[Find a Phone Number](#)  
[Knowledge Base](#)  
[Manage Your Account](#)

