

66332-8 ✓ ACTIVE

AMP | AMP Type III+

TE Internal #: 66332-8

Power Contacts, Contact, Precious Metal, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+

[View on TE.com >](#)



Connectors > Power Connectors > Power Contacts > TYPE III CONTACTS STRIP



Power Contact Type: **Contact**

Contact Mating Area Plating Material: **Precious Metal**

Wire Size: **.2 – .6 mm²**

Connector & Contact Terminates To: **Wire & Cable**

[All TYPE III CONTACTS STRIP \(55\)](#)

Features

Product Type Features

| | |
|-----------------------------------|--------------|
| Power Contact Type | Contact |
| Connector & Contact Terminates To | Wire & Cable |

Electrical Characteristics

| | |
|--------------|------|
| Test Current | 13 A |
|--------------|------|

Contact Features

| | |
|---|------------------|
| Contact Mating Area Plating Material | Precious Metal |
| Contact Current Rating (Max) | 13 A |
| Contact Type | Pin |
| Contact Retention Within Housing | With |
| Mating Pin Diameter | 1.57 mm[.062 in] |
| Contact Base Material | Brass |
| Contact Mating Area Plating Material Thickness | .76 µm[30 µin] |
| Wire Contact Termination Area Plating Thickness | 1.27 µm[50 µin] |



| | |
|---|-----------------|
| Wire Contact Termination Area Plating Material | Tin |
| Wire Contact Termination Area Plating Material Finish | Matte |
| Contact Orientation | Straight |
| Contact Underplating Material | Nickel |
| Contact Underplating Material Thickness | 1.27 µm[50 µin] |
| Contact Size | 16 |

Termination Features

| | |
|------------------------------------|-------|
| Termination Method to Wire & Cable | Crimp |
|------------------------------------|-------|

Mechanical Attachment

| | |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

| | |
|--|-----------------------------|
| Wire Size | .2 – .6 mm ² |
| Accepts Wire Insulation Diameter Range | 2.03 – 2.54 mm[.08 – .1 in] |

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 150 °C[-67 – 302 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Packaging Features

| | |
|--------------------|------|
| Packaging Method | Reel |
| Packaging Quantity | 4000 |

Other

| | |
|-----------------|---|
| Wire/Cable Type | Discrete Wire |
| For Use With | CPC Connectors, G Series Connectors, M Series Connectors |
| Comment | Overall insulation crimp diameter, including crimp barrel, must not exceed 3.18 [.125]. |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2022 (224)

Candidate List Declared Against: JUNE 2022 (224)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # 305183
EXTRACT TOOL TYPE 2 20-16



TE Part # 2305570-1
TERMINAL CUTTER, SIDE FEED



TE Part # 1-305183-1
EXTRACT TOOL MATE-N-LOK P



TE Part # 2-2151641-1
OCEAN_2.0_APPPLICATOR-S-062F1200



TE Part # 2-2151641-2
OCEAN_2.0_APPPLICATOR-S-062F1200A



TE Part # 2151641-1
OCEAN_2.0_APPPLICATOR-S-062F1200



TE Part # 2151641-2
OCEAN_2.0_APPPLICATOR-S-062F1200A



TE Part # 7-2151641-1
OCEAN_2.0_APPPLICATOR-S-062F1200




TE Part # 7-2151641-2
OCEAN_2.0_APPPLICATOR-S-062F1200A




KIT
TE Part # 7-2151641-7
OCEAN_2.0_SPARE_PART_KIT-062F1200

TE Part # 466942-1
SCA SMPR062F0900

Also in the Series | AMP Type III+



Insertion & Extraction Tools(4)



Power Contacts(414)

Customers Also Bought



TE Part #66331-7
III+ SKT,24-20,15AU/FL,STRIP






TE Part #322985
TERMINAL,PIDG SPD 12-10 6



TE Part #4-640440-1
11P MTA100 CONN ASSY 22AWG RED



TE Part #52265
TERMINAL R PG 6 10

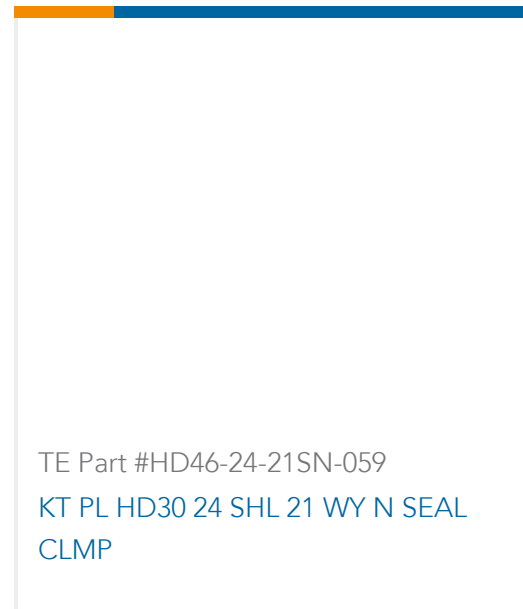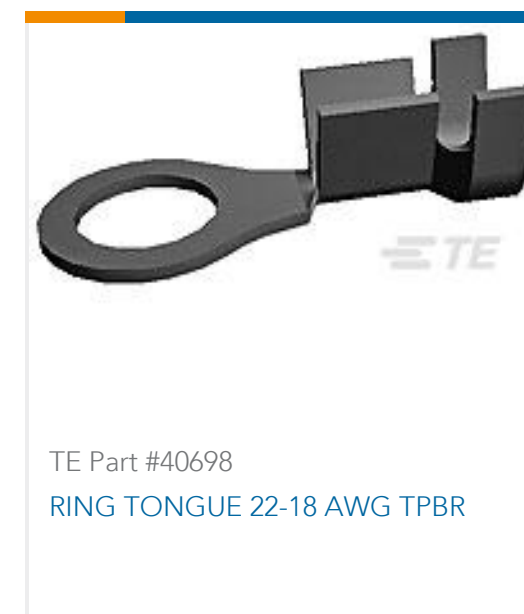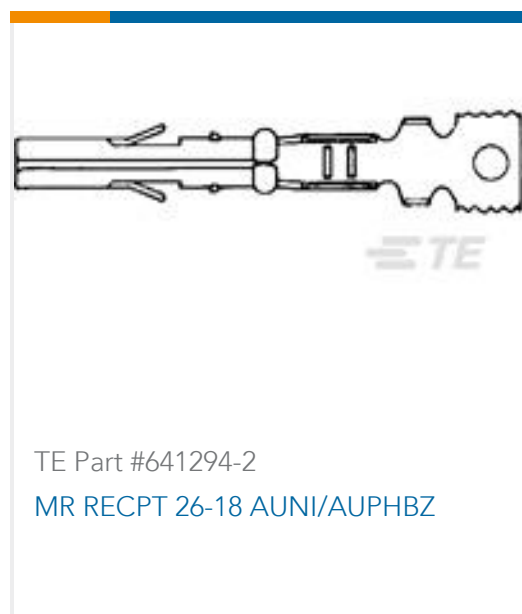

Documents

Product Drawings

III+ PIN,24-20,30AU/FL,STRIP

English

CAD Files

Customer View Model

ENG_CVM_CVM_66332-8_AG.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_66332-8_AG.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66332-8_AG.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications

English

Signal Contacts

English

M_SERIES_PIN_AND_SOCKET_CONNECTORS

English

Product Specifications



Application Specification

English

Product Environmental Compliance

[MD_66332-8_04092014034_dmtec](#)

English

[MD_66332-8_04092014034_dmtec](#)

English