



LOC		DIST		P		F		REVISIONS		DATE	APPD
ZONE	LTR	DESCRIPTION		DATE	APPD						
AF	AF			0	MSF	WAS 88-1039-59-1		3/15/89	MSF		

- 1 MAG-MATE CAVITY SPECIFICATION.
- 2 CARRIER SIDE ONLY.
- 3 STRIPPING SHOULDERS
GAGING: GO .006 / NO GO .0095.
- 4 SLOT TERMINATES #20 SOLID WIRE.
GAGING: GO .027 / NO GO .031.
- 5 SLOT TERMINATES #30-#27 COPPER MAGNET WIRE EITHER SINGLE OR DOUBLE OF THE SAME SIZE.
GAGING: GO .0058 / NO GO .0088.

IDENTIFICATION NUMBER FOR MAGNET WIRE RANGE

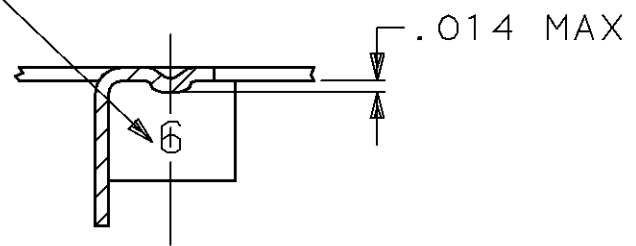

SECTION A-A

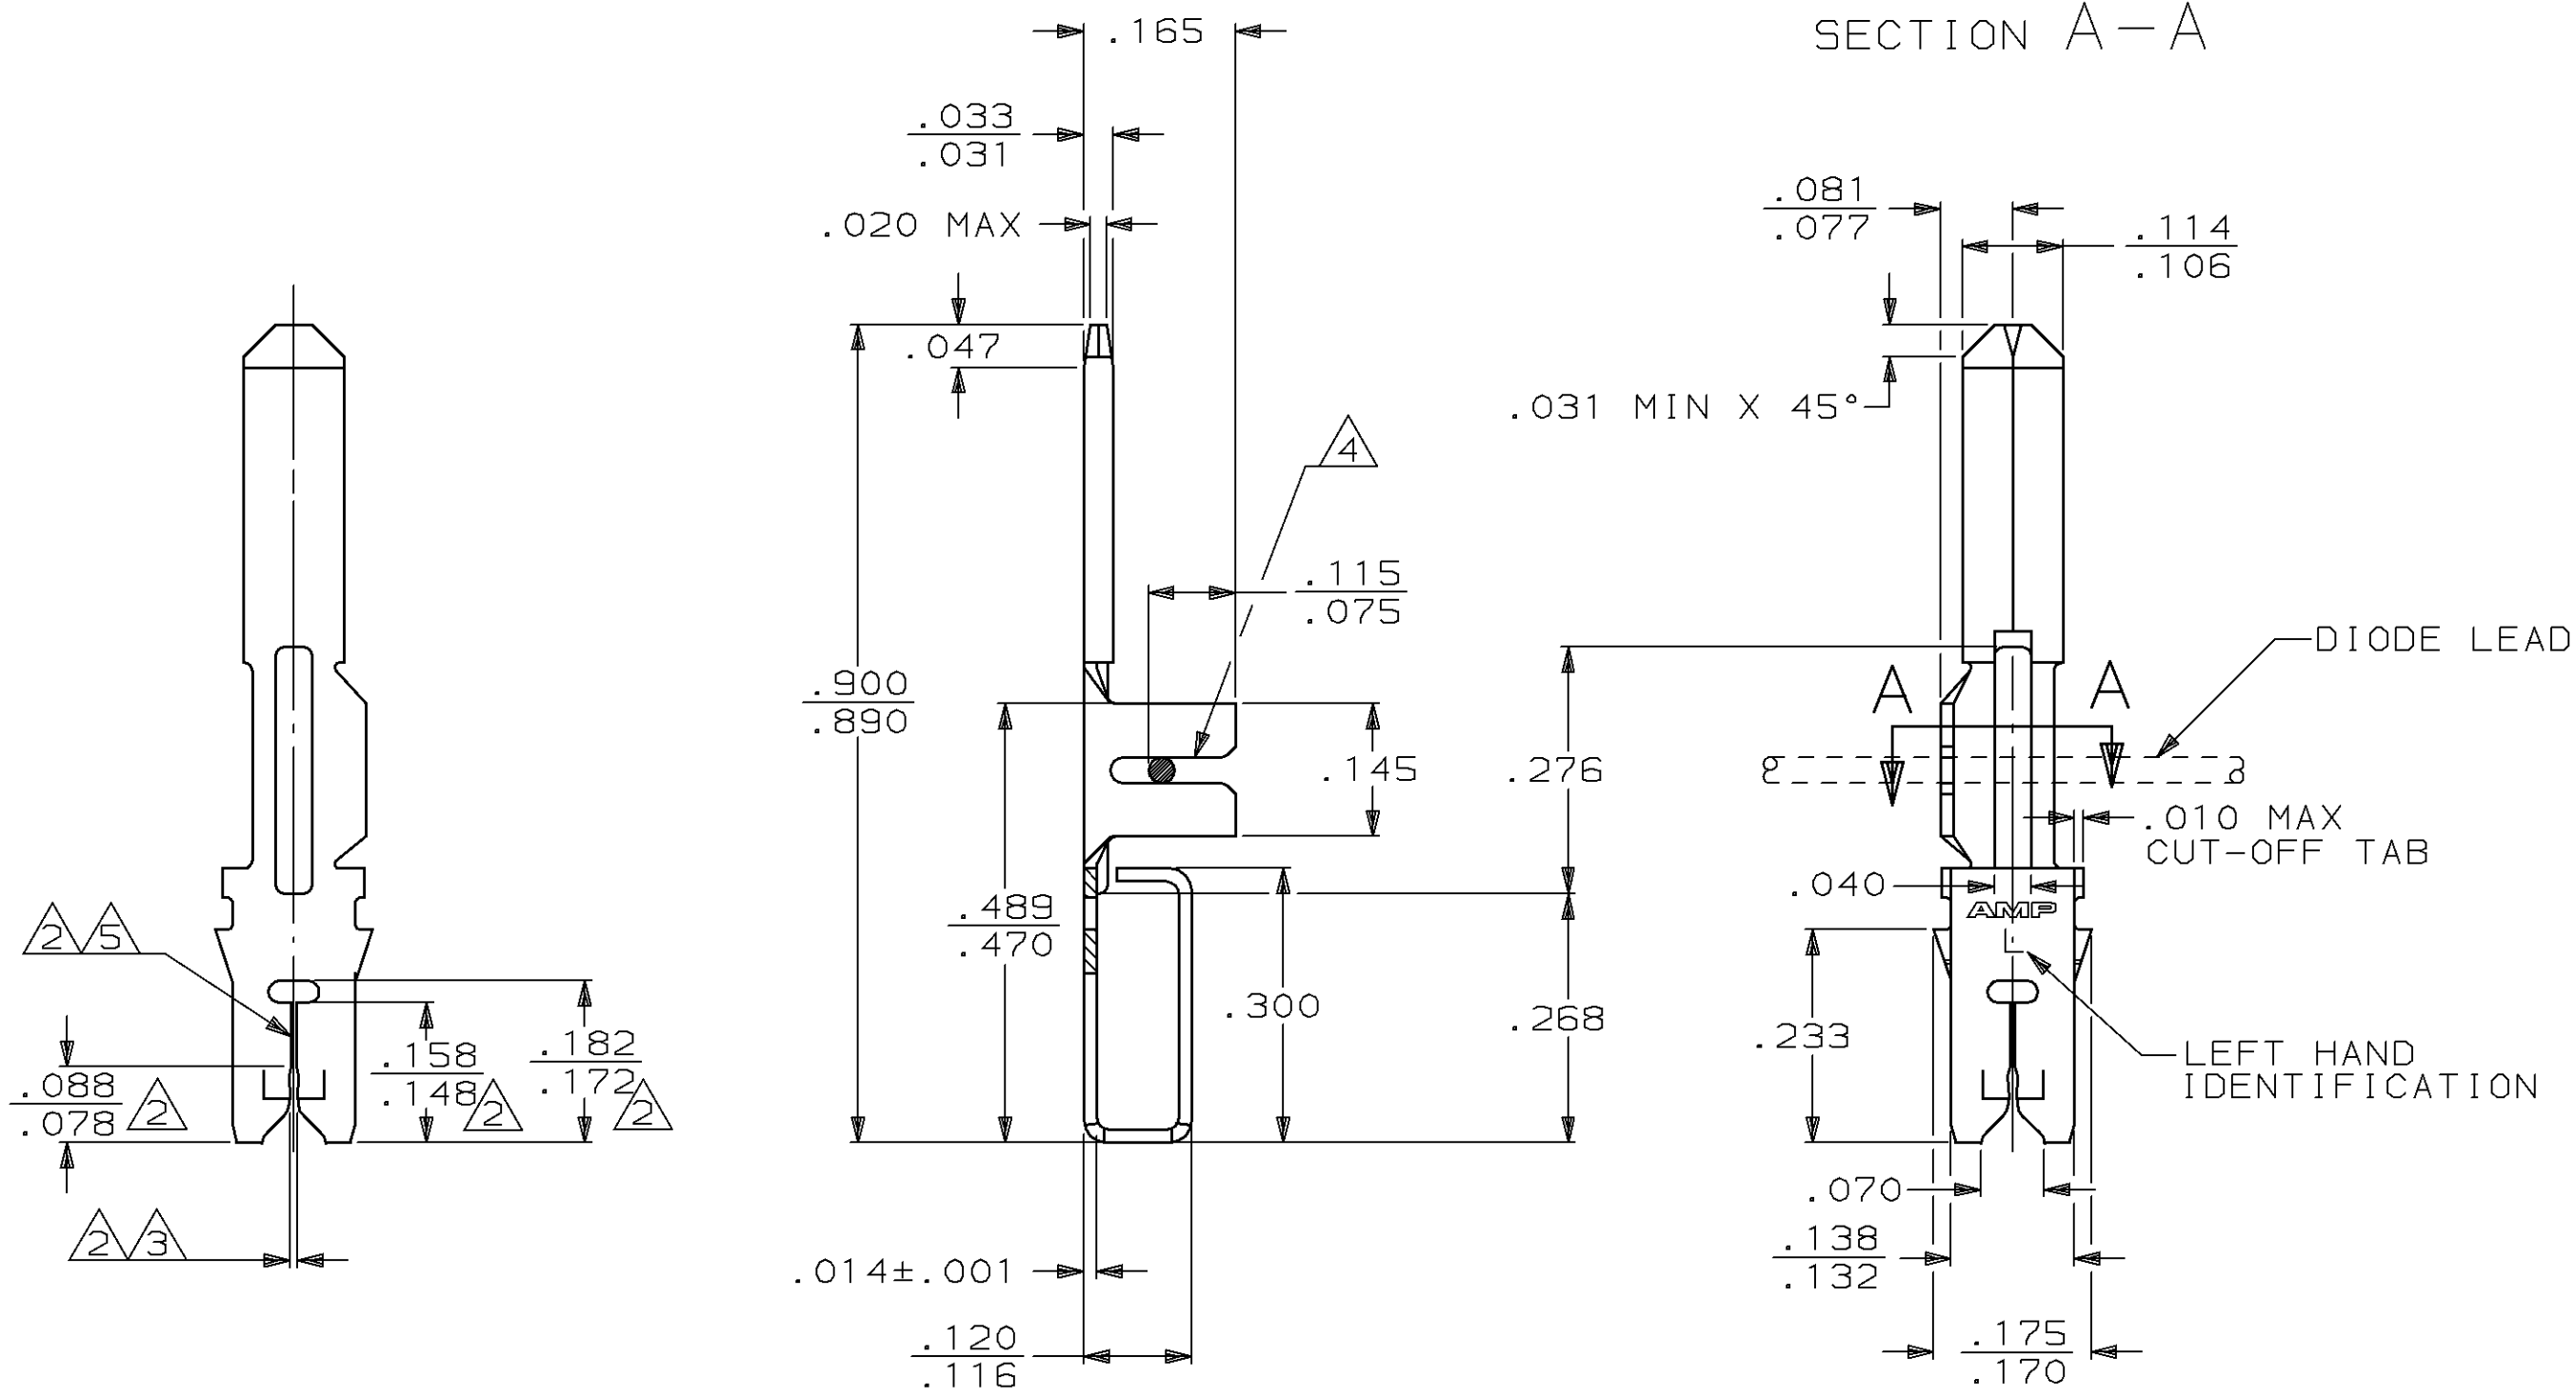

PROPOSED DESIGN
 NOT RELEASED FOR
 PRODUCTION

63530-1

PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .010 ANGLES ± -	DR	MSF	3/15/89	AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK				
MATERIAL #4 HARD BRASS	APPD			NAME TERMINAL, LOOSE PIECE, TAB/DIODE SLOT, LEFT HAND, "110" FASTON, MAG-MATE™	
	PRODUCT SPEC			SIZE	C
FINISH .000080 MIN TIN PER MIL-T-10727	APPLICATION SPEC	114-2046	1	FSCM NO	00779
	WEIGHT	-		DRAWING NO	63530
				SCALE	5:1
				SHEET	1 OF 1