SPLICE

TE Internal #: 60932-2

Splices, 2500 – 4700 CMA Wire Size, Steel, Pigtail Splice / Thru Splice Splice, O Serration, Length .219 in [5.56 mm], Reel, Open,

SPLICE

View on TE.com >



Terminals & Splices > Splices











Sealable: No

Wire Size: **2500 – 4700 CMA** Primary Product Material: Steel Splice Type: Pigtail Splice, Thru Splice

Terminal Material Thickness: .5 mm [.02 in]

Features

Product Type Features

Barrel Style	Standard
Sealable	No
Splice Type	Pigtail Splice, Thru Splice
Serrated	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Serrations	0
	O
Compatible With Wire & Cable Type	Discrete Wire
Compatible With Wire & Cable Type	

Steel

Contact Features

Primary Product Material



Barrel Type	Open
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Wire Size	2500 – 4700 CMA
Terminal Material Thickness	.5 mm[.02 in]
Overall Product Length	5.56 mm[.219 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 - 250 °C[-40 - 482 °F]
Operation/Application	
Heavy Duty	No
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	50000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 61300-1 SPLICE IS 10000-16000 .031 TPST



TE Part # 42627-4 SPLICE 3232-8282 .0198 NPST




TE Part # 63414-1 SPLICE 9000-16000 .031 TPST




TE Part # 60933-2 SPLICE 2200-2900 .012 TPST



TE Part # 41627-1 SPLICE 4000-10000 .025 ST



TE Part # 61008-1 SPLICE 18-16 AWG .0158 TPST



TE Part # 160659-2 SPLICE 800-2500 .016 NPST



TE Part # 2-2150102-1
OCEAN_2.0_Applicator-E-120F



TE Part # 2-2150102-2 OCEAN_2.0_Applicator-E-120F



TE Part # 2150102-1
OCEAN_2.0_Applicator-E-120F



TE Part # 2150102-2 OCEAN_2.0_Applicator-E-120F



TE Part # 7-2150102-1
OCEAN_2.0_Applicator-E-120F








Also in the Series | SPLICE



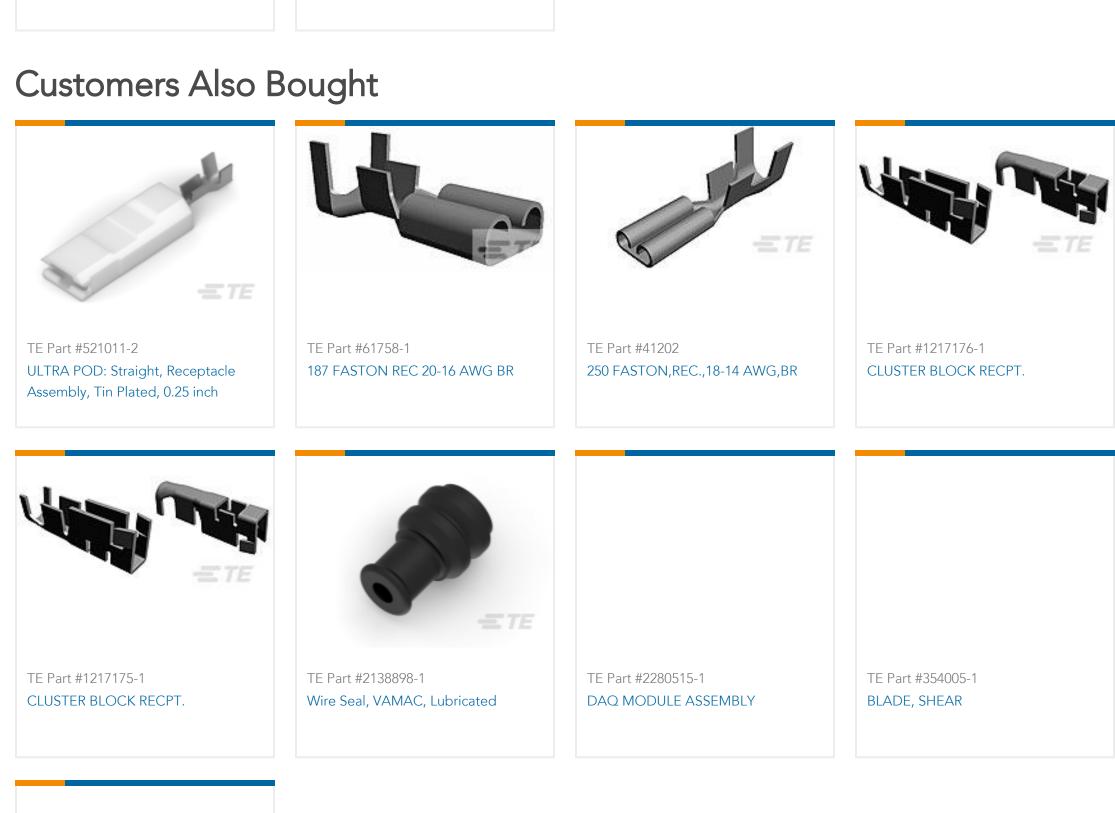

TE Part #354005-3 BLADE, SHEAR



Documents

Product Drawings

SPLICE 2500-4700 .020 TPST

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_60932-2_S.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_60932-2_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_60932-2_S.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English