


AMP-HDI

TE Internal #: 5532430-5 PCB Mount Header, Vertical, Board-to-Board, 60 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal

View on TE.com >



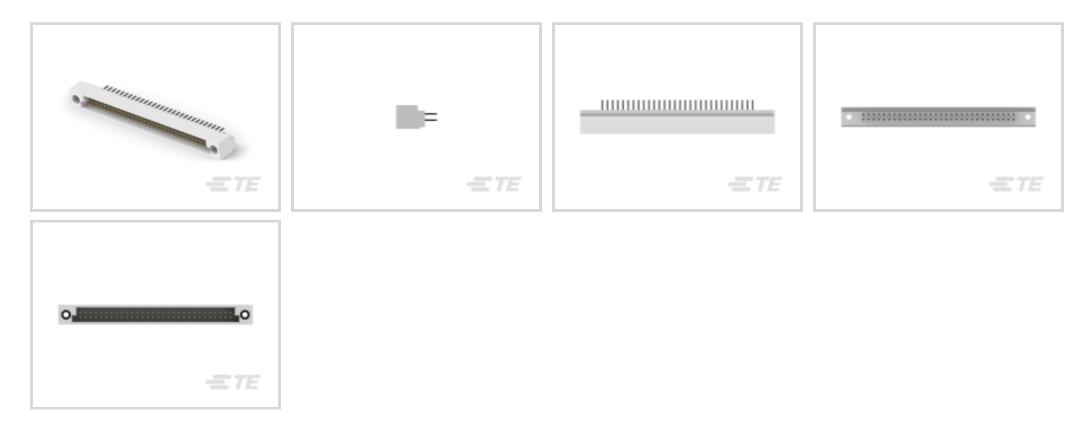

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 60

Number of Rows: 2

Features



Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Stackable	No
PCB Mount Orientation	Vertical
Number of Positions	60
Number of Rows	2
Electrical Characteristics	
Insulation Resistance	2 ΜΩ
Body Features	
Primary Product Color	Brown, Natural

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 60 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal



Contact Features

Mating Square Post Dimension	.64 mm[.025 in]
PCB Contact Termination Area Plating Material Thickness	.1 μm[3.937 μin]
Contact Shape & Form	Four Beam
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
	29.9212 µin
Contact Type	Pin
Contact Current Rating (Max)	3 A
ermination Features	
Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Post & Tail Length	4.83 mm[.19 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment	With
Mating Alignment Type	Polarized
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
lousing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Thermoplastic
Dimensions	
Connector Height	11.73 mm[.461 in]
Jsage Conditions	
Housing Temperature Rating	High
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
Operation/Application	
Circuit Application	Signal

L For support call+1 800 522 6752

07/29/2022 04:41PM | Page 2

PCB Mount Header, Vertical, Board-to-Board, 60 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal



UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	6
Packaging Type	Tube
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Not Yet Reviewed
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Pin-in-Paste capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



PCB Mount Header, Vertical, Board-to-Board, 60 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal



Customers Also Bought

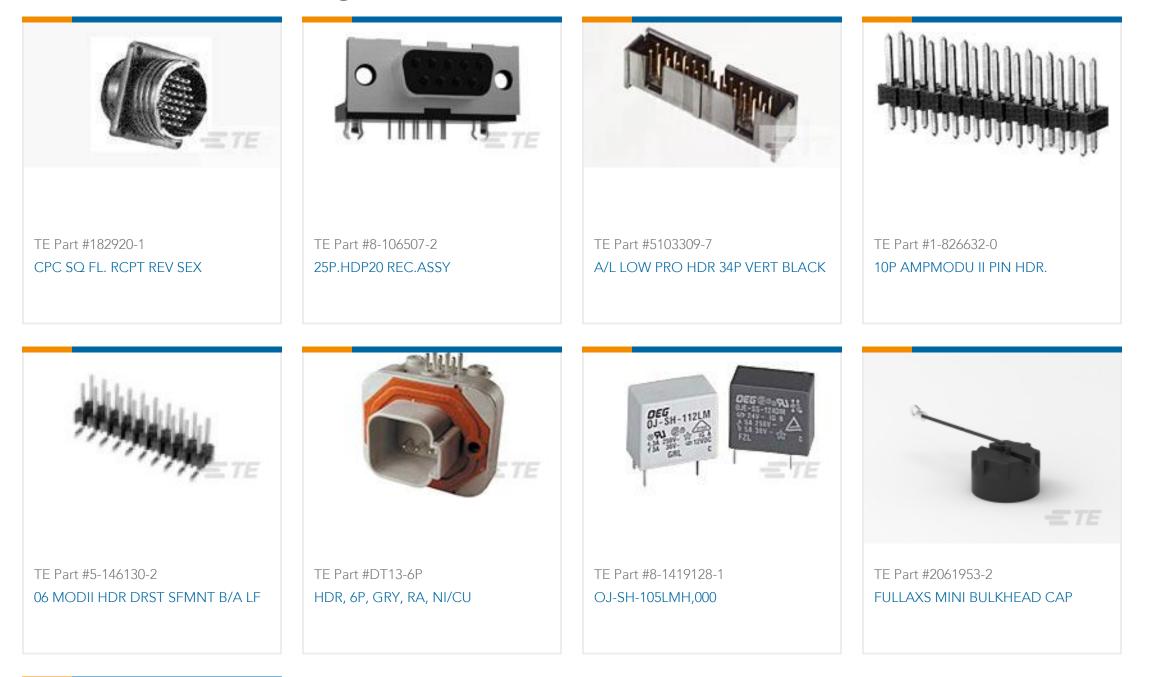



TE Part #2061981-2

FULLAXS MINI BULKHEAD

Documents

Product Drawings ASSY, PIN, VERTICAL, HDI, LEAD-FRE

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_5532430-5_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5532430-5_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5532430-5_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 60 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal



Datasheets & Catalog Pages

1-1773957-5_AMP_HDI_BTB_CONNECTORS_EN

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

English