




Connectors > Power Connectors > Power Contacts

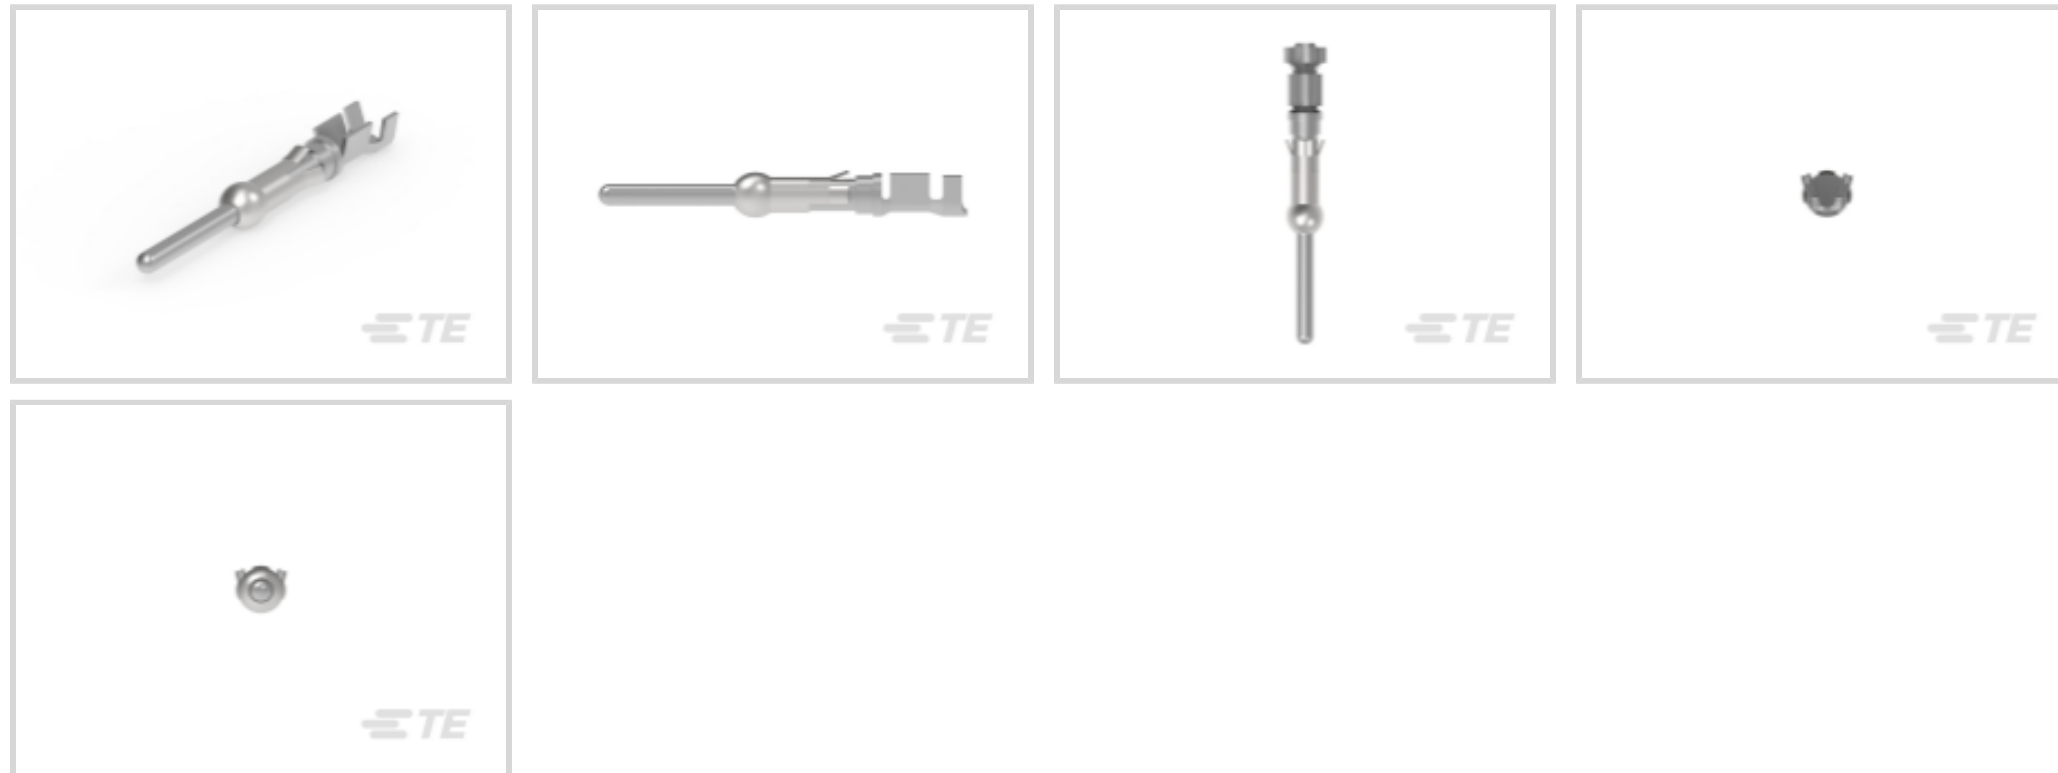

Power Contact Type: **Contact**

Contact Mating Area Plating Material: **Precious Metal**

Wire Size: **.8 – 1.4 mm²**

Connector & Contact Terminates To: **Wire & Cable**

Features

Product Type Features

| | |
|-----------------------------------|--------------|
| Power Contact Type | Contact |
| Connector & Contact Terminates To | Wire & Cable |

Electrical Characteristics

| | |
|--------------|------|
| Test Current | 13 A |
|--------------|------|

Contact Features

| | |
|---|------------------|
| Contact Shape & Form | Round |
| Contact Mating Area Plating Material | Precious Metal |
| Contact Current Rating (Max) | 13 A |
| Contact Type | Pin |
| Contact Retention Within Housing | With |
| Mating Pin Diameter | 1.57 mm[.062 in] |
| Contact Base Material | Brass |
| Contact Mating Area Plating Material Thickness | 2.54 μm[100 μin] |
| Contact Mating Area Plating Material Finish | Bright |
| Wire Contact Termination Area Plating Thickness | 2.54 μm[100 μin] |



| | |
|---|-----------------|
| Wire Contact Termination Area Plating Material | Tin-Lead |
| Wire Contact Termination Area Plating Material Finish | Bright |
| Contact Orientation | Straight |
| Contact Underplating Material | Nickel |
| Contact Underplating Material Thickness | 1.27 µm[50 µin] |
| Contact Size | 16 |

Termination Features

| | |
|------------------------------------|-------|
| Termination Method to Wire & Cable | Crimp |
|------------------------------------|-------|

Mechanical Attachment

| | |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

| | |
|--|-----------------------------|
| Wire Size | .8 – 1.4 mm ² |
| Accepts Wire Insulation Diameter Range | 2.03 – 2.54 mm[.08 – .1 in] |

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 150 °C[-67 – 302 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Packaging Features

| | |
|--------------------|---------------------|
| Packaging Method | Carton, Loose Piece |
| Packaging Quantity | 1000 |

Other

| | |
|-----------------|--|
| Wire/Cable Type | Discrete Wire |
| For Use With | CPC Connectors, G Series Connectors, M Series Connectors |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|--|
| EU RoHS Directive 2011/65/EU | Not Compliant |
| EU ELV Directive 2000/53/EC | Not Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) |



Candidate List Declared Against: JAN 2022
(223)

SVHC > Threshold:

Pb (13% in Component Part)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts






TE Part # 169400
CERTI-LOK

Also in the Series | AMP Type III+



Insertion & Extraction Tools(4)

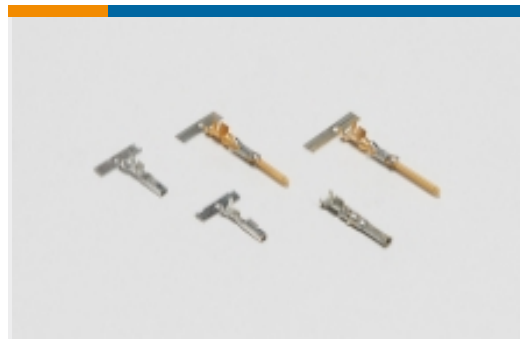

Power Contacts(414)

Customers Also Bought



TE Part #206429-1
CPC PLUG ASSY, 11-4, REV SEX



TE Part #211400-1
CPC PLUG ASSEMBLY SIZE 13-7



TE Part #1-66101-9
III+ SKT,18-16,TIN ,LP




TE Part #1-1630012-4
HSC150 33R 5%



TE Part #4-1879075-4
Power Resistor: Aluminum Housed, 75 Watt



TE Part #206966-7
CABLE SHELL CLAMP SIZE 13

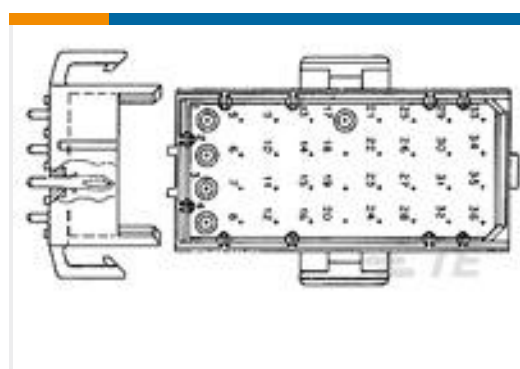

TE Part #640505-1
24P MR HDR ASSY V0



TE Part #66101-2
III+ SKT,18-16,TIN-LEAD,LP



TE Part #323127
SOLIS SPD 22-16COMM 22-18MIL 6



Documents

Product Drawings

[III+ PIN,18-16,TIN-LEAD,LP](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_66099-2_AE.2d_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_66099-2_AE.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_66099-2_AE.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD_66099-2_10312017718_dmtec](#)

English

[MD_66099-2_10312017718_dmtec](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

Japanese

[Instruction Sheet \(U.S.\)](#)

English

Agency Approvals

[Agency Approval Document](#)

English