





PRODUCT NO

69830

PRODUCT NO.	COVER P/N	BASE ASSY P/N	NO. OF POSITION	A	B	C
69830-006	68118-006	69831-006	6	12.08 / .476	6.35 / .250	5.08 / .200
-008	-008	-008	8	14.62 / .576	8.89 / .350	7.62 / .300
-010	-010	-010	10	17.16 / .676	11.43 / .450	10.16 / .400
-014	-014	-014	14	22.24 / .876	16.51 / .650	15.24 / .600
-016	-016	-016	16	24.78 / .976	19.05 / .750	17.78 / .700
-018	-018	-018	18	27.32 / 1.076	21.59 / .850	20.32 / .800
-020	-020	-020	20	29.86 / 1.176	24.13 / .950	22.86 / .900
-024	-024	-024	24	34.94 / 1.376	29.21 / 1.150	27.94 / 1.100
-026	-026	-026	26	37.48 / 1.476	31.75 / 1.250	30.48 / 1.200
-030	-030	-030	30	42.56 / 1.676	36.83 / 1.450	35.56 / 1.400
-034	-034	-034	34	47.64 / 1.876	41.91 / 1.650	40.64 / 1.600
-040	-040	-040	40	55.26 / 2.176	49.53 / 1.950	48.26 / 1.900
-050	-050	-050	50	67.96 / 2.676	62.23 / 2.450	60.96 / 2.400
-060	-060	-060	60	80.66 / 3.176	74.93 / 2.950	73.66 / 2.900
69830-064	68118-064	69831-064	64	85.74 / 3.376	80.01 / 3.150	78.74 / 3.100



RECOMMENDED MOUNTING HOLE LAYOUT

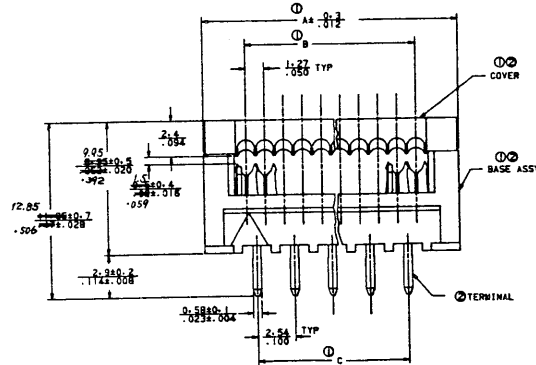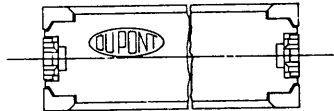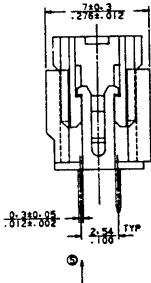

NOTES:

- SEE TABLE.
- MATERIAL:
BASE — POLYESTER(PET) GLASS
COVER — 30% FILLED, UL 94V-0, COLOR: BLUE.
TERMINAL — PHOSPHOR BRONZE.
- FINISH:
TERMINAL — ALL OVER SnPb PLATING
(SnPb 93/7), 3.81μm(150μin)min.;
1.27μm(50μin)min Ni UNDER PLATING.
- APPLICABLE SPECIFICATIONS:
PRODUCT SPEC 110-019
CRIMPING (I.D.C) SPEC 100-004.
- CONTACT RETENSION FORCE:
400g ± 10%. MIN. AGAINST THIS DIRECTION.

CUSTOMER COPY
CODE IDENT
22526

DuPont
Electronics



TITLE
QUICKIE DIL PCB CONNECTOR(1.00
SHORT LEG)

SHEET INDEX	ISSUE	SH NO	1	LEVELS	DO NOT SCALE DRAWING	TOLERANCE UNLESS OTHERWISE NOTED	MM/INCH	MATL	DR	DATE
									W. AIKAWA	05/06/86
								SEE NOTE ②	CHK	5/12/86
								SEE NOTE ③	ENGR	5/12/86
									APPD	5/12/86

SCALE SIZE DWG NO
5-1 C 69830

CAD CUST
SHEET 1 OF 1

FORM E-3042