
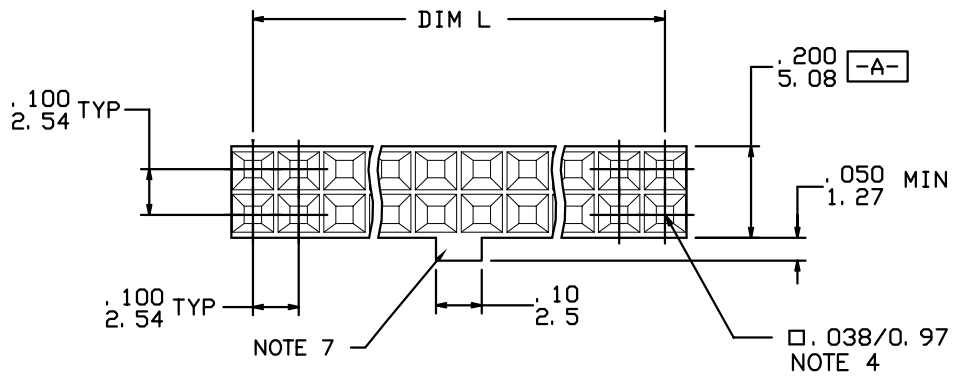


PRODUCT NUMBER
SEE TABLE

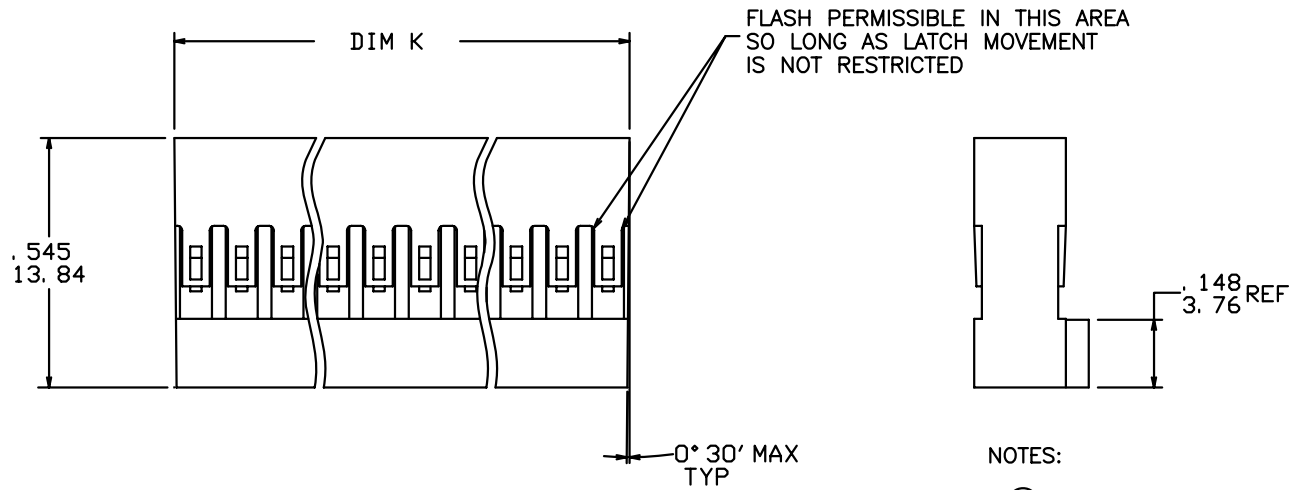

NOTES:

- ① PIN LENGTH RECOMMENDED IS $.225 \pm .015 / 5.72 \pm 0.38$.
- ② MOLDING MATERIAL: MODIFIED POLYPHENYLENE ETHER, FLAME RETARDANT PER UL-94V-0, COLOR: BLACK.
3. SEE TA-75 FOR CRIMPING INSTRUCTIONS.
PRODUCT SPECIFICATION: BUS-12-067.
- ④ .003/0.08 MAX FLASH PERMISSIBLE AROUND LEAD IN.
- ⑤ ADD AN LF SUFFIX TO PART NUMBERS FOR PRODUCT THAT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
6. THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESSES.
- ⑦ CORING CONFIGURATION IN POLARIZING KEY IS MANUFACTURING OPTION.
- ⑧ STANDARD TOLERANCES:
 $.XX \pm .01 / .X \pm .3$
 $.XXX \pm .005 / .XX \pm .13$
 $.XXXX \pm .0020 / .XXX \pm .051$

FCJ
FCconnect.com

Copyright FCJ

mat'l. code SEE NOTE 2		surface	tolerance	projection	product family
ltr ecn no dr date		tolerances unless otherwise specified			PV HOUSINGS
E	v03-1360	PJ	2/13/04	INCH/MM	title
F	v05-0716	TAB	7/29/05	linear	MINI LATCH HOUSING DR POL.
G	v05-0842	HTB	8/31/05	0°±2'	.100 [2.54] X .100 [2.54]CC
H	v06-0446	HTB	5/15/06	dr	scale 3:1
				engr	M. CORNMAN 8/30/90
				chr	C. TREXLER 8/30/90
				appd	C. TREXLER 8/30/90
sheet	revision	H			FCJ
index	sheet	1			69176
					type Product Customer Drawing

PRODUCT NUMBER NOTE 5	NO. OF POS.	DIM K MAX.	DIM L
69176-004	2X2	.200/5.08	.100/2.54
69176-006	2X3	.300/27.62	.200/5.08
69176-008	2X4	.400/10.16	.300/27.62
69176-010	2X5	.500/12.70	.400/10.16
69176-012	2X6	.600/15.24	.500/12.70
69176-014	2X7	.700/17.78	.600/15.24
69176-016	2X8	.800/20.32	.700/17.78
69176-018	2X9	.900/22.86	.800/20.32
69176-020	2X10	1.000/25.40	.900/22.86
69176-022	2X11	1.100/27.94	1.000/25.40
69176-024	2X12	1.200/30.48	1.100/27.94
69176-026	2X13	1.300/33.02	1.200/30.48
69176-028	2X14	1.400/35.56	1.300/33.02
69176-030	2X15	1.500/38.10	1.400/35.56
69176-032	2X16	1.600/40.64	1.500/38.10
69176-034	2X17	1.700/43.18	1.600/40.64
69176-036	2X18	1.800/45.72	1.700/43.18
69176-038	2X19	1.900/48.26	1.800/45.72
69176-040	2X20	2.000/50.80	1.900/48.26
69176-042	2X21	2.100/53.34	2.000/50.80
69176-044	2X22	2.200/55.88	2.100/53.34
69176-046	2X23	2.300/58.42	2.200/55.88
69176-048	2X24	2.400/60.96	2.300/58.42
69176-050	2X25	2.500/63.50	2.400/60.96
69176-052	2X26	2.600/66.04	2.500/63.50

PRODUCT NUMBER NOTE 5	NO. OF POS.	DIM K MAX.	DIM L
69176-054	2X27	2.700/68.58	2.600/66.04
69176-056	2X28	2.800/71.12	2.700/68.58
69176-058	2X29	2.900/73.66	2.800/71.12
69176-060	2X30	3.000/76.20	2.900/73.66
69176-062	2X31	3.100/78.74	3.000/76.20
69176-064	2X32	3.200/81.28	3.100/78.74
69176-066	2X33	3.300/83.82	3.200/81.28
69176-068	2X34	3.400/86.36	3.300/83.82
69176-070	2X35	3.500/88.90	3.400/86.36
69176-072	2X36	3.600/91.44	3.500/88.90



FCJconnect.com

Copyright FCJ

mat'l. code SEE NOTE 2		surface <input checked="" type="checkbox"/>	tolerance	projection	product family PV HOUSINGS
ltr	ecn no	dr	date	tolerances unless otherwise specified	title
H				angles linear SEE NOTE 8	MINI LATCH HOUSING DR POL.
				0'±2'	.100 [2.54] X .100 [2.54]CC
				dr M. CORNMAN 8/30/90	scale 3:1
				engr C. TREXLER 8/30/90	FCJ
				chr C. TREXLER 8/30/90	dwg no 69176 sheet 2 of 2 size A3
				appd C. TREXLER 8/30/90	type Product Customer Drawing
sheet index	revision sheet				