9-1318120-3 - ACTIVE

Dynamic Series | Dynamic 2000 Series

TE Internal #: 9-1318120-3 Housing, Receptacle, Wire-to-Board, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Dynamic 2000 Series

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

Receptacle and Tab Housing: 2.5 mm pitch, 250V

Connector Product Type: Housing Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 3

Centerline (Pitch): 2.5 mm [.098 in]

All Receptacle and Tab Housing: 2.5 mm pitch, 250V (54)

Features

Product Type Features

 Connector Product Type
 Housing

 Connector & Housing Type
 Receptacle

 Connector System
 Wire to Board



Connector System	Wire-to-Board			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	3			
Number of Rows	1			
Termination Features				
Termination Method to Wire & Cable	Crimp			
Mechanical Attachment				
Mating Retention	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			
Housing Features				
Centerline (Pitch)	2.5 mm[.098 in]			
Housing Color	Natural			
Usage Conditions				

C For support call+1 800 522 6752

9-1318120-3

Housing, Receptacle, Wire-to-Board, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Dynamic 2000 Series



Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]					
Operation/Application						
Circuit Application	Signal					
Product Compliance For compliance documentation, visit the product page on TE.com>						
EU RoHS Directive 2011/65/EU	Compliant					
EU ELV Directive 2000/53/EC	Compliant					
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold					
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed					
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.					
Solder Process Capability	Not applicable for solder process capability					

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

TE Part # 9-1318123-2 DYNAMIC D2100 HDR V ASSY 3P Y NATURAL


Also in the Series | Dynamic 2000 Series


& For support call+1 800 522 6752

9-1318120-3

Housing, Receptacle, Wire-to-Board, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Dynamic 2000 Series



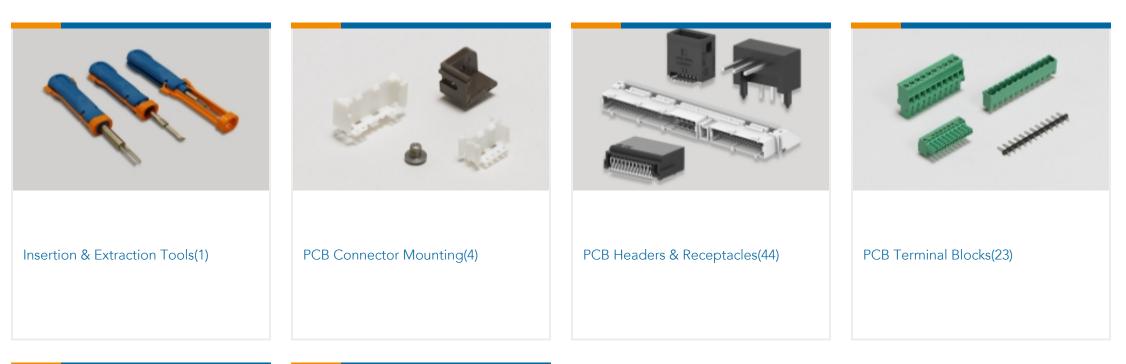

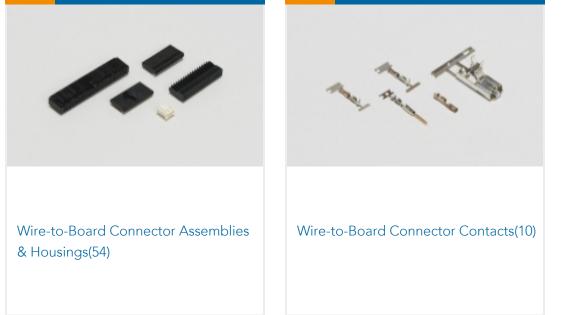

Customers Also Bought



TE Part #1-353046-3 DYNAMIC D-5200S TAB HSG 3P K/X	TE Part #1-178288-6 Receptacle and Tab Housing: 3.81 mm pitch, 250V	TE Part #1-1318119-4 DYNAMIC D-2100 REC HSG 8P	TE Part #175030-2 070 MLC TAB CONT LP
TE Part #176283-2 AMP UNIVERSAL POWER CAP 3P	TE Part #172444-1 20P B/H CAP HSG MARKED		

Documents

Product Drawings DYNAMIC D2100 REC HSG 3P SGL Y NATURAL

Japanese

CAD Files

3D PDF

3D

Customer View Model

9-1318120-3

Housing, Receptacle, Wire-to-Board, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Dynamic 2000 Series



ENG_CVM_CVM_9-1318120-3_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_9-1318120-3_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_9-1318120-3_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

Japanese

1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

English

Product Specifications

Dynamic Connector D-2000 Series

Japanese

Application Specification

Japanese

Agency Approvals TUV Certificate

English

TUV Certificate

English