


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0879113211](#)  
**Status:** **Active**  
**Overview:** C-Grid Connector Products  
**Description:** 2.54mm Pitch C-Grid Header, Right-Angle, Through Hole, 32 Circuits, 0.38µm Gold (Au) Selective Plating, Tube Packaging, Lead-Free

**Documents:**

<a href="#">3D Model</a>	<a href="#">Packaging Specification PK-89990-519-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary 879200000-TS-000 (PDF)</a>
<a href="#">Product Specification PS-87920-019-001 (PDF)</a>	<a href="#">Test Summary 879200001-TS-000 (PDF)</a>
<a href="#">Application Specification 713080001-AS-000 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

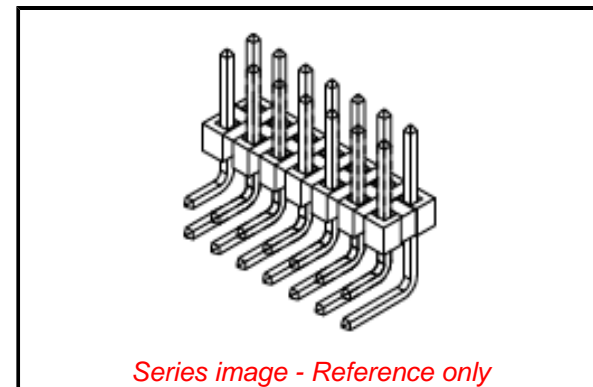

*Series image - Reference only*

**Agency Certification**

UL E29179

**General**

Product Family	PCB Headers
Series	<a href="#">87911</a>
Application	Board-to-Board, Signal, Wire-to-Board
Overview	<a href="#">C-Grid Connector Products</a>
Product Name	C-Grid
UPC	822348836581

**Physical**

Breakaway	Yes
Circuits (Loaded)	32
Circuits (maximum)	32
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.571/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	3.18mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.381µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole

**EU ELV**

**Not Relevant**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Contained Per  
-ED/01/2018 (15  
January 2018)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[87911 Series](#)

**Mates With**

C-Grid Right-Angle PCB Receptacle [71979](#)  
 . C-Grid Shunt Terminal Housing [7859](#) . C-Grid Vertical PCB Receptacle [71850](#) . SL Crimp Housing [70450](#)

**Electrical**

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	014
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	265

**Material Info****Reference - Drawing Numbers**

Application Specification	713080001-AS-000
Packaging Specification	PK-89990-519-001
Product Specification	PS-87920-019-001
Sales Drawing	SD-87911-027-001
Test Summary	879200000-TS-000, 879200001-TS-000

This document was generated on 03/23/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**