



Connectors &gt; Power Connectors &gt; Power Contacts

Power Contact Type: **Contact**Operating Voltage: **600 VDC**Contact Mating Area Plating Material: **Pre-Tin**Wire Size: **22 – 18 AWG**

## Features

### Product Type Features

Power Contact Type	Contact
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

### Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

### Contact Features

Contact Mating Area Plating Material	Pre-Tin
Contact Current Rating (Max)	11.2 A
Contact Type	Socket
Contact Retention Within Housing	With
Mating Pin Diameter	1 mm [.039 in]
Contact Base Material	Phosphor Bronze
Wire Contact Termination Area Plating Thickness	2.54 μm [100 μin]
Wire Contact Termination Area Plating Material	Pre-Tin
Wire Contact Termination Area Plating Material Finish	Matte



Contact Orientation	Straight
---------------------	----------

### Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

### Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Wire Insulation Support	Without
-------------------------	---------

### Dimensions

Wire Size	.3 – .9 mm <sup>2</sup>
-----------	-------------------------

Accepts Wire Insulation Diameter Range	1.5 – 2.39 mm [.059 – .094 in]
--	--------------------------------

### Usage Conditions

Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
-----------------------------	-----------------------------

### Operation/Application

Circuit Application	Power
---------------------	-------

### Industry Standards

CSA Rating	Certified
------------	-----------

Glow Wire Rating	Standard Part - Not Glow Wire
------------------	-------------------------------

VDE Tested	No
------------	----

Agency/Standard	CSA, UL
-----------------	---------

CSA File Number	LR 7189
-----------------	---------

UL Rating	Recognized
-----------	------------

UL File Number	E28476
----------------	--------

### Packaging Features

Packaging Method	Reel
------------------	------

Packaging Quantity	4500
--------------------	------

### Other

Wire/Cable Type	Discrete Wire
-----------------	---------------

Wire Type	Stranded
-----------	----------

For Use With	Plug Housing
--------------	--------------

Comment	HDM Applicator part number ending in -1 is used on AMPOMATOR CLS Machine with T or G Terminators, -2 is used on AMP-O-LECTRIC Model K Machine, -3 is used on AMP-O-LECTRIC Model G Machine.
---------	---

## Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts

 <p>TE Part # CAT-AM71-C83998EE MINI CPC</p>	 <p>TE Part # 91522-1 CCII MINI UNML PIN SKT 22-18 ASSY</p>	 <p>TE Part # 90759-1 PROCRIMP TL W/DIE MIN UNIV MNL</p>	 <p>TE Part # 189727-1 EXTRACTION TOOL</p>
---	---	---	---




TE Part # 455830-1  
INSERTION TOOL



TE Part # 770586-1  
22P MINI UMNL PLUG HSG



TE Part # 794942-1  
10P MINI UMNL CAP HSG



TE Part # 770587-1  
24P MINI UMNL PLUG HSG



TE Part # 770582-1  
14P MINI UMNL PLUG HSG



TE Part # 770585-1  
20P MINI UMNL PLUG HSG



TE Part # 172333-1  
MINI UNIVERSAL M-N-L HOUSING



TE Part # 794781-1  
10P MINI UMNL PLUG HSG



TE Part # 794941-1  
08P MINI UMNL CAP HSG



TE Part # 794821-1  
08P MINI UMNL PLUG HSG



TE Part # 794940-1  
06P MINI UMNL CAP HSG



TE Part # 770581-1  
12P MINI UMNL PLUG HSG



TE Part # 770580-1  
10P MINI UMNL PLUG HSG



TE Part # 770584-1  
18P MINI UMNL PLUG HSG




TE Part # 172328-1  
MINI UNIVERSAL MATE-N-LOK CAP HOUSING 2P




TE Part # 172330-1  
MINI UNIVERSAL MATE-N-LOK CAP HOUSING 4P

Also in the Series | **Mini-Universal MATE-N-LOK**




Connector Contacts(11)



Insertion & Extraction Tools(1)




PCB Headers & Receptacles(1)




Power Contacts(85)



Rectangular Backshells & Clamps(2)

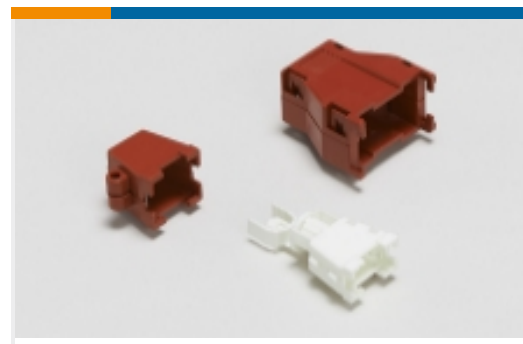

Rectangular Boots & Strain Relief(2)

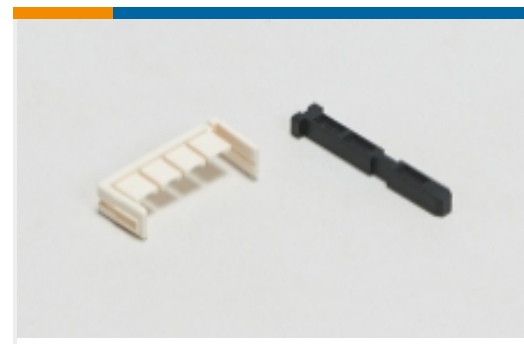

Rectangular Connector Keying Plugs(2)



Rectangular Connector Locking(2)




Rectangular Connector Seals(20)



Rectangular Power Connectors(283)

### Customers Also Bought

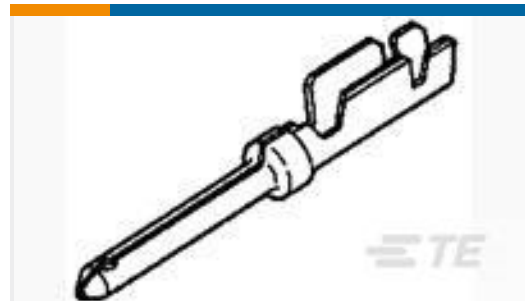

TE Part #1658670-3  
PIN CONTACT,22 DF,STRIP,22-28



TE Part #520971-2  
ULTRA-POD 250 ASY REC 18-14 AWG TPBR



TE Part #52369-1  
TERMINAL,PIDG SPD FLG 26-22 4




TE Part #2-520263-4  
ULTRA-FAST 250 ASY REC 22-18 TPBR




TE Part #172165-1  
2 CIR UNIV M-N-L PLUG NATL



TE Part #62026-1  
187 FASTON REC 20-16 AWG TPBR

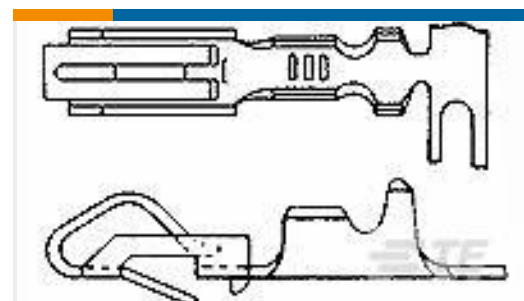

TE Part #3-61668-1  
BIF-LEAF CONT CR/SNAP SN/BR

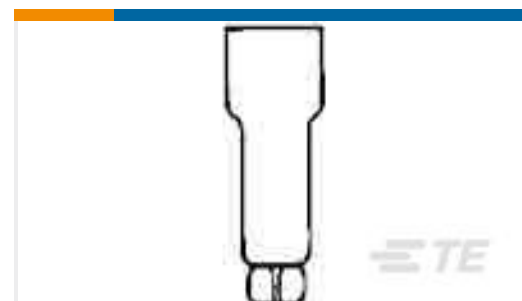

TE Part #320788  
SPLICE,CE 18-8



TE Part #1-770009-0  
UMNL II PIN AUSN/NI/BR



**KIT**  
REPRESENTATION ONLY  
TE Part #7-2837824-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-058F0670

### Documents



### Product Drawings

#### MINI UMNL SOK CONT 22-18 AWG

English

---

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_CVM\\_770904-4\\_W.2d\\_dxf.zip](#)

English

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_770904-4\\_W.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_770904-4\\_W.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

#### AMP Circular Connectors for Commercial Signal & Power Applications Continued

English

[SOFT\\_SHELL\\_PIN\\_AND\\_SOCKET\\_CONNECTORS\\_CATALOG](#)

English

---

### Product Specifications

#### Product Specification

English

---

### Product Environmental Compliance

[MD\\_770904-4\\_10182016116\\_dmtec](#)

English

[MD\\_770904-4\\_10182016116\\_dmtec](#)

English

---

### Instruction Sheets

#### Instruction Sheet (U.S.)

English