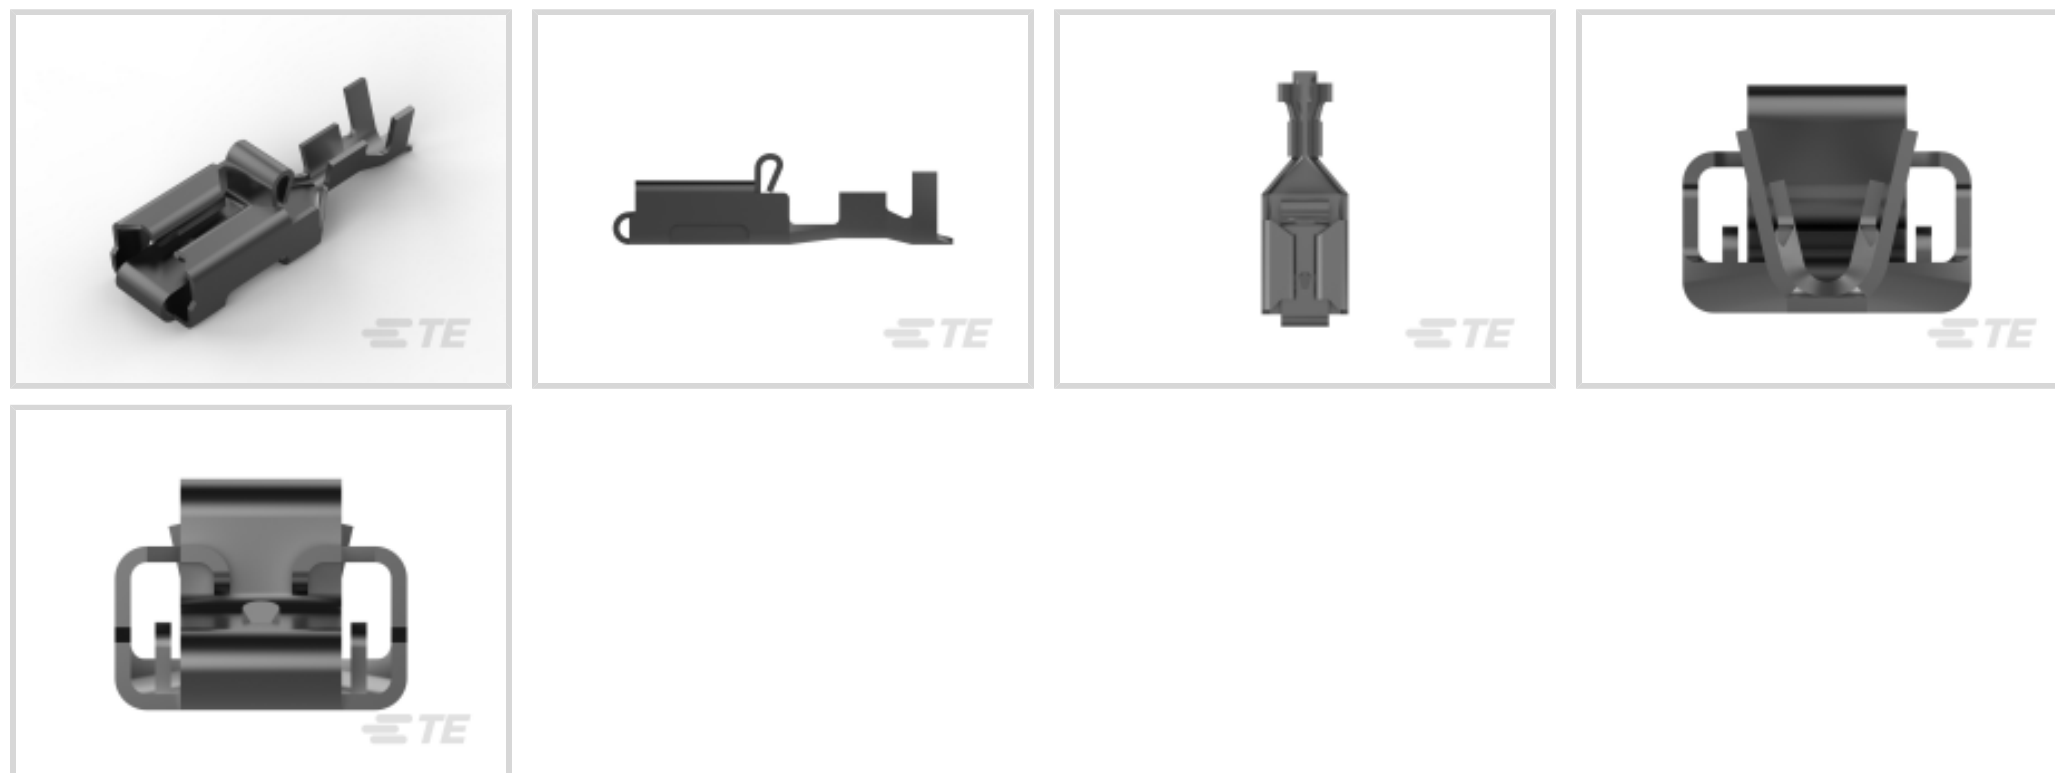




Terminals & Splices > Quick Disconnects

Quick Disconnect Terminal Type: **Receptacle**Wire Size: .51 – 1.03 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Terminates To	Wire & Cable
Wire Stop	No
Wire/Cable Type	Discrete Wire
Insertion Force	Low
Sealable	No

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Mechanical Attachment



Mating Retention Type	Dimple
-----------------------	--------

Wire Insulation Support	With
-------------------------	------

Dimensions

Accepts Wire Insulation Diameter Range	2.01 – 3.3 mm [.079 – .13 in]
--	-------------------------------

Overall Length	20.7 mm [.815 in]
----------------	-------------------

Receptacle Terminal Stock Thickness	.41 mm [.016 in]
-------------------------------------	------------------

Wire Size	.51 – 1.03 mm ²
-----------	----------------------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Industry Standards

UL Rating	Recognized
-----------	------------

Packaging Features

Packaging Quantity	1500
--------------------	------

Packaging Method	Reel
------------------	------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
--	--

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2305570-1
TERMINAL CUTTER, SIDE FEED



TE Part # 1855664-1
HDM/FA SAPR.080F.140F LM CUT



TE Part # 1855664-2
HDM/FA SAPR.080F.140F BENCH K CUT



TE Part # 1855664-3
HDM/FA SAPR.080F.140F BENCH G CUT



TE Part # 1855664-6
HDM/FA SAPR.080F.140F LM CONT



TE Part # 2-2151553-2
OCEAN_2.0_Applicator-S-080F140F-A



TE Part # 2151553-2
OCEAN_2.0_Applicator-S-080F140F




TE Part # 7-2151553-2
OCEAN_2.0_Applicator-S-080F140F




KIT
REPRESENTATION ONLY

TE Part # 7-2151553-7
OCEAN_2.0_SPARE_PART_KIT-080F140F


Also in the Series | Positive Lock 250

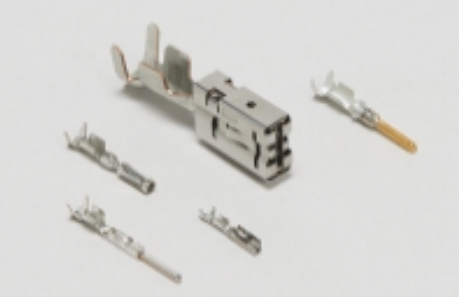

Automotive Terminals(1)

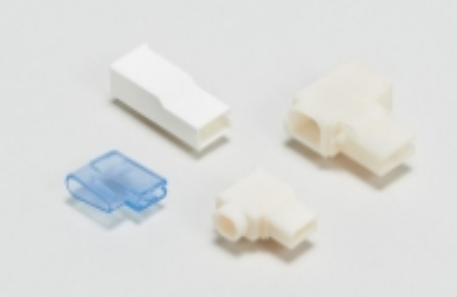

Crimp Terminal Housings(203)



Insertion & Extraction Tools(3)

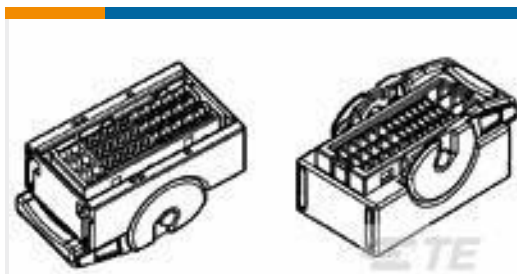
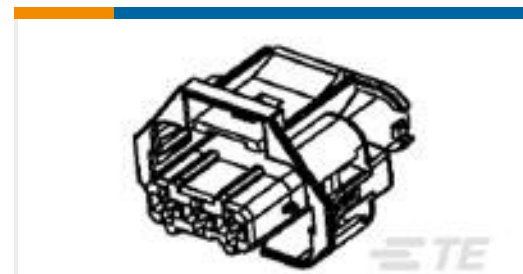
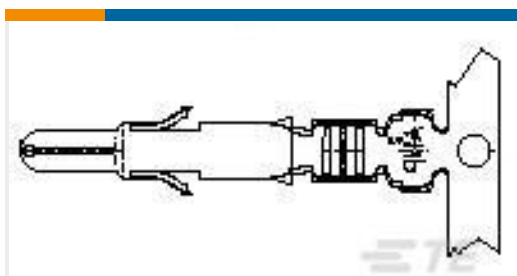
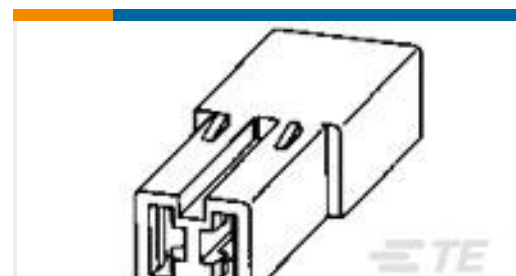
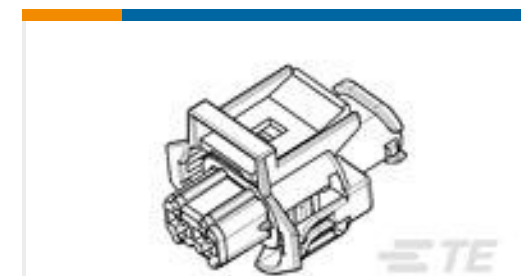


Insulation Boots & Sleeves(4)



Quick Disconnects(189)

Customers Also Bought

TE Part #1743089-2
LIF HYB 39P PLUG ASSY BLKTE Part #936061-2
2.8MM SLD 3P PLUG ASSY-RAILTE Part #626328-2
FF 250 RECEPTACLE 4.0-6.0 MM2
TPBRTE Part #735222-2
FF 250 REC 1.0-2.5 MM2 0.32X 19.30
BRTE Part #881109-3
U-M-N-L SPLIT PINTE Part #626036-1
RING TONGUE TERMINAL 4.0-6.0
MM2 BRTE Part #881600-1
FF 250 HOUSING RECEPTACLE
NATURAL PA.6.6TE Part #936060-2
2.8MM SLD 3P PLUG ASSY-TDCTE Part #282435-6
RELAY HSG.W.SEC.LOCK.ASSY9 POSTE Part #881111-3
U-M-N-L SOCKET

Documents

Product Drawings

[PL REC 0.5-1.0 MM2 0.40 X 52.32 PTPBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_880646-5_E1.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_880646-5_E1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_880646-5_E1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

[MD_880646-5_09152017059_dmtec](#)

English

[MD_880646-5_09152017059_dmtec](#)

English