794955-2 ACTIVE

VAL-U-LOK

TE Internal #: 794955-2 Power Contacts, Contact, 600 VAC, Gold, 22 – 18 AWG Wire Size, . 3 – .82 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Pin

View on TE.com >

Connectors > Power Connectors > Power Contacts



Power Contact Type: Contact Operating Voltage: 600 VAC Contact Mating Area Plating Material: Gold Wire Size: .3–.82 mm²

Features

Product Type Features



rioduct rype reatures	
Power Contact Type	Contact
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable
Electrical Characteristics	
Operating Voltage	600 VAC
Contact Features	
Contact Fabrication	Stamped & Formed
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	9 A
Contact Type	Pin
Contact Retention Within Housing	With
Mating Square Post Dimension	1.14 mm[.045 in]
Contact Base Material	Brass
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]

2.54 µm[100 µin]

Wire Contact Termination Area Plating Thickness

C For support call+1 800 522 6752

Power Contacts, Contact, 600 VAC, Gold, 22 – 18 AWG Wire Size, .3 – .82 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Pin



Wire Contact Termination Area Plating Material	Pre-Tin
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Wire Insulation Support	Without
Dimensions	
Wire Size	.3 – .82 mm²
Accepts Wire Insulation Diameter Range	1.5 – 3.1 mm[.059 – .122 in]
Jsage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Operation/Application	
Circuit Application	Power
ndustry Standards	
Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard	CSA, UL
CSA File Number	208567
UL Rating	Recognized
UL File Number	E28476
Packaging Features	
Packaging Method	Reel
Packaging Quantity	3500
Other	
Wire/Cable Type	Discrete Wire

Product Compliance

For compliance documentation, visit the product page on TE.com>

Power Contacts, Contact, 600 VAC, Gold, 22 – 18 AWG Wire Size, .3 – .82 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Pin




EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

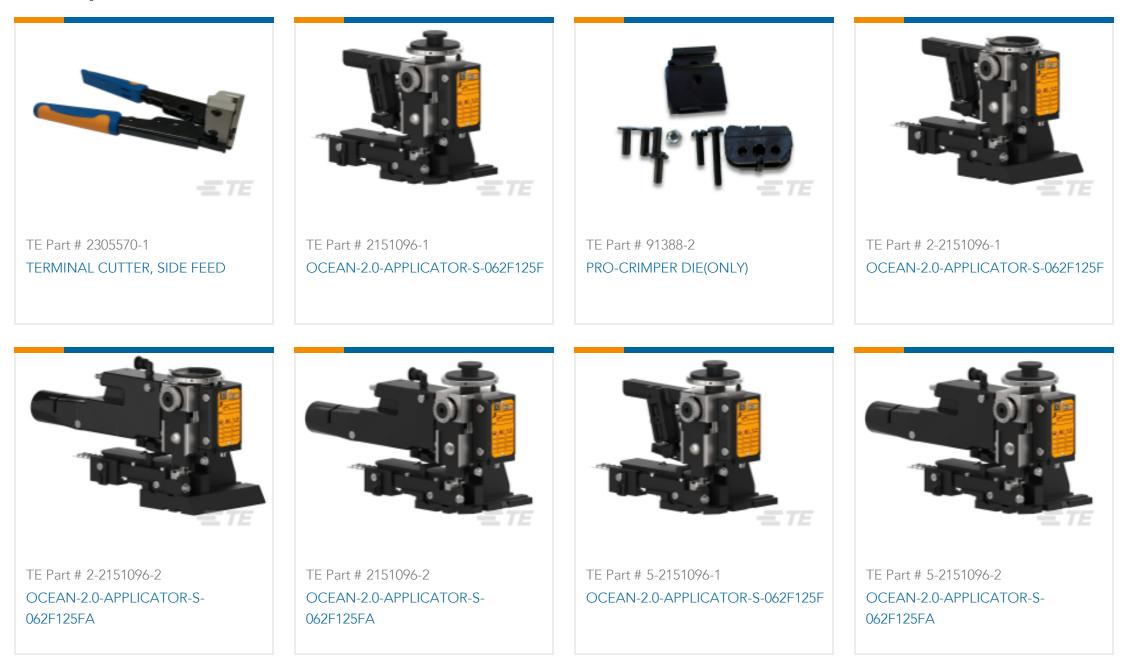

Power Contacts, Contact, 600 VAC, Gold, 22 – 18 AWG Wire Size, .3 – .82 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Pin





Customers Also Bought



I				
	= TE			
	TE Part #HD10-3BT BOOT, 3P, PLG/REC, ST, GRY			

Documents

Product Drawings VAL-U-LOK PIN BR AU 22-18AWG

English

CAD Files

Customer View Model ENG_CVM_CVM_794955-2_G.2d_dxf.zip

English

3D PDF

Power Contacts, Contact, 600 VAC, Gold, 22 – 18 AWG Wire Size, .3 – .82 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp, Power, Pin



3D

Customer View Model ENG_CVM_CVM_794955-2_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_794955-2_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications Application Specification

English