



Connectors > Power Connectors > Power Contacts

Power Contact Type: **Contact**Operating Voltage: **600 VDC**Contact Mating Area Plating Material: **Pre-Tin**Wire Size: **26 – 22 AWG**

Features

Product Type Features

Power Contact Type	Contact
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Contact Features

Contact Mating Area Plating Material	Pre-Tin
Contact Current Rating (Max)	11.2 A
Contact Type	Socket
Contact Retention Within Housing	With
Mating Pin Diameter	1 mm [.039 in]
Contact Base Material	Phosphor Bronze
Wire Contact Termination Area Plating Thickness	.4 μm [15.74 μin]
Wire Contact Termination Area Plating Material	Pre-Tin
Wire Contact Termination Area Plating Material Finish	Bright



Contact Orientation	Straight
---------------------	----------

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	.12 – .4 mm ²
-----------	--------------------------

Accepts Wire Insulation Diameter Range	1.19 – 1.75 mm [.047 – .069 in]
--	---------------------------------

Usage Conditions

Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

CSA Rating	Certified
------------	-----------

Glow Wire Rating	Standard Part - Not Glow Wire
------------------	-------------------------------

VDE Tested	No
------------	----

Agency/Standard	CSA, UL
-----------------	---------

CSA File Number	LR 7189
-----------------	---------

UL Rating	Recognized
-----------	------------

UL Flammability Rating	UL 94V-0
------------------------	----------

UL File Number	E28476
----------------	--------

Packaging Features

Packaging Method	Reel
------------------	------

Packaging Quantity	7000
--------------------	------

Other

Wire/Cable Type	Discrete Wire
-----------------	---------------

Wire Type	Stranded
-----------	----------

For Use With	Plug Housing
--------------	--------------

Comment	HDM Applicator part number ending in -3 is used on AMPOMATOR CLS Machine with T or G Terminators, -4 is used on AMP-
---------	--



O-LECTRIC Model K Machine, -5 is used on AMP-O-LECTRIC Model G Machines.

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)


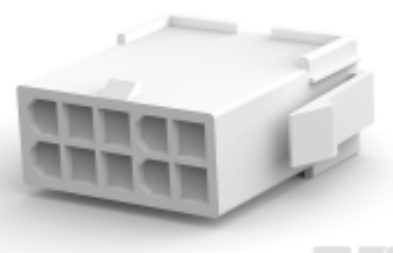
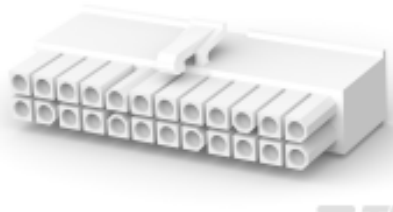
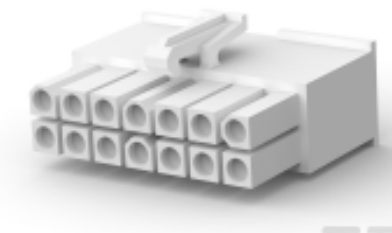

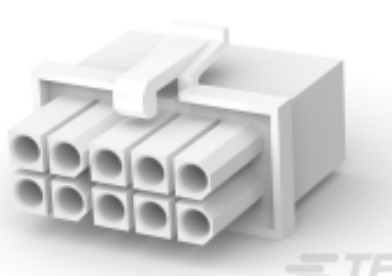
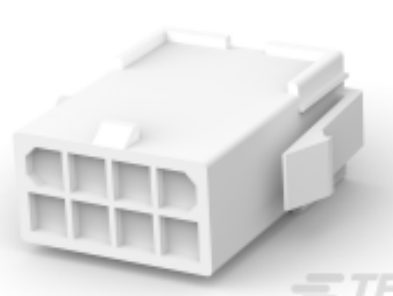
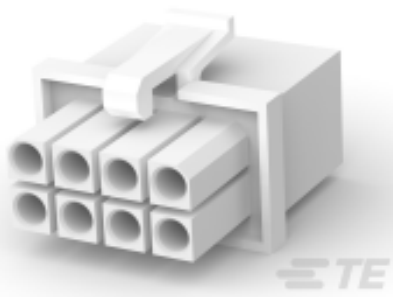
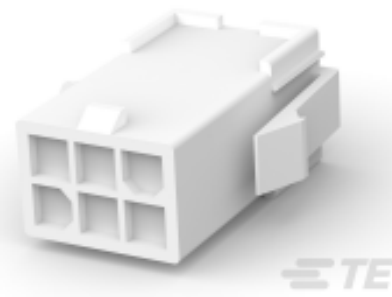
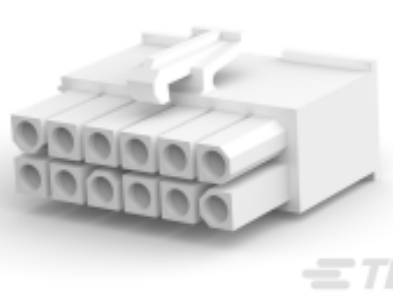
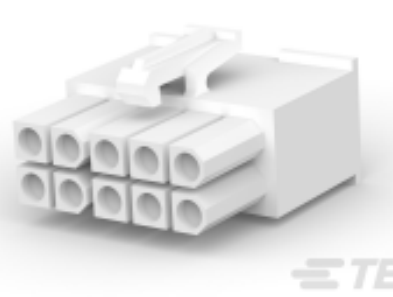




EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer





This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

<p>TE Part # CAT-AM71-C8398EE MINI CPC</p>	<p>TE Part # 90758-2 PROCrimp DIE MINI UNIV MNL</p>	<p>TE Part # 189727-1 EXTRACTION TOOL</p>	<p>TE Part # 455830-1 INSERTION TOOL</p>


 <p>TE Part # 770586-1 22P MINI UMNL PLUG HSG</p>	 <p>TE Part # 794942-1 10P MINI UMNL CAP HSG</p>	 <p>TE Part # 770587-1 24P MINI UMNL PLUG HSG</p>	 <p>TE Part # 770582-1 14P MINI UMNL PLUG HSG</p>
 <p>TE Part # 770585-1 20P MINI UMNL PLUG HSG</p>	 <p>TE Part # 172333-1 MINI UNIVERSAL M-N-L HOUSING</p>	 <p>TE Part # 794781-1 10P MINI UMNL PLUG HSG</p>	 <p>TE Part # 794941-1 08P MINI UMNL CAP HSG</p>
 <p>TE Part # 794821-1 08P MINI UMNL PLUG HSG</p>	 <p>TE Part # 794940-1 06P MINI UMNL CAP HSG</p>	 <p>TE Part # 770581-1 12P MINI UMNL PLUG HSG</p>	 <p>TE Part # 770580-1 10P MINI UMNL PLUG HSG</p>
 <p>TE Part # 770584-1 18P MINI UMNL PLUG HSG</p>	 <p>TE Part # 172328-1 MINI UNIVERSAL MATE-N-LOK CAP HOUSING 2P</p>	 <p>TE Part # 172330-1 MINI UNIVERSAL MATE-N-LOK CAP HOUSING 4P</p>	 <p>TE Part # 172170-1 12 CIR UNIV M-N-L PLUG</p>

Also in the Series | **Mini-Universal MATE-N-LOK**

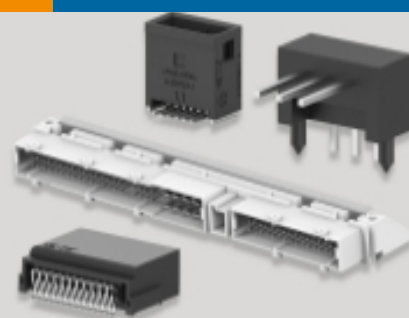
 <p>Connector Contacts(11)</p>	 <p>Insertion & Extraction Tools(1)</p>	 <p>PCB Headers & Receptacles(1)</p>	 <p>Power Contacts(85)</p>
---	--	---	---



Rectangular Backshells & Clamps(2)

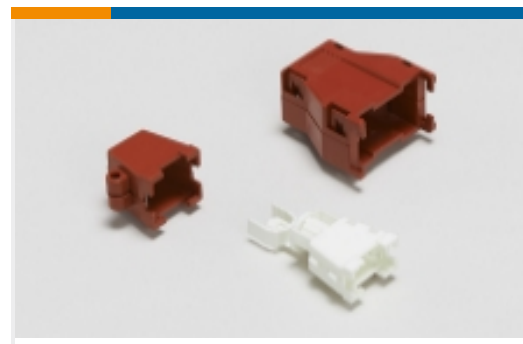


Rectangular Boots & Strain Relief(2)

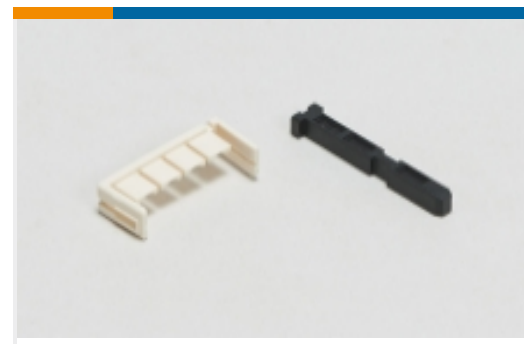

Rectangular Connector Keying Plugs(2)



Rectangular Connector Locking(2)

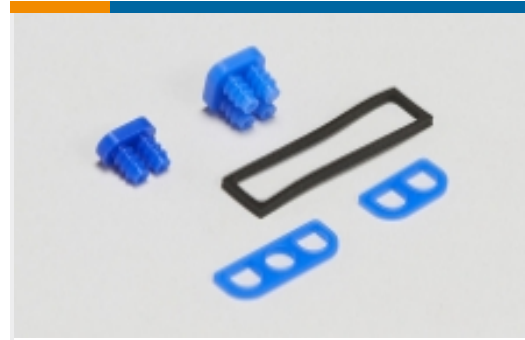

Rectangular Connector Seals(20)



Rectangular Power Connectors(283)


Customers Also Bought




TE Part #172336-1
2P MINI UMNL PLUG HOUSING



TE Part #1-480699-2
02P UMNL CAP HSG RED

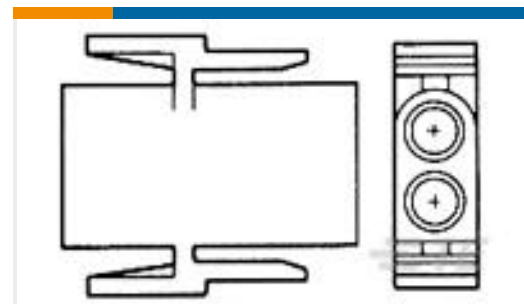

TE Part #1-350344-0
02P .140 MNL PLUG NAT

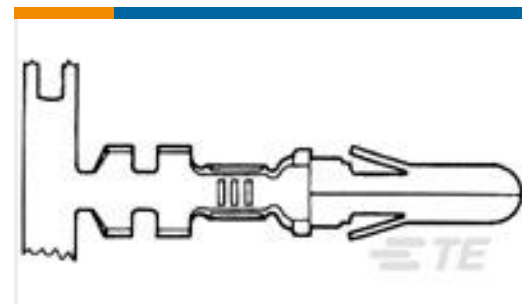

TE Part #61627-1
.140 DIA PIN 20-14 PTPBR



TE Part #794995-1
MINI UMNL CAVITY PLUG SEAL




TE Part #179594-1
AMP POWER D/LOCK TAB CONT. L/P



TE Part #86571-6
RND WIRE RCPT L.P.



TE Part #118577-000
S01-05-R

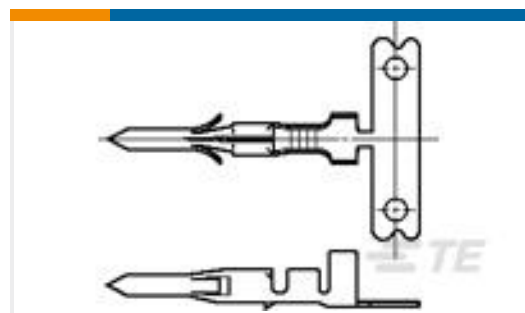

TE Part #794017-1
.062 CP&S PIN PTPBR L/P 24-18



TE Part #2151015-1
OCEAN_2.0_APPLICATOR-S-062F125F

Documents



Product Drawings

MINI UMNL SOCK 26-22 AWG SN

English

CAD Files

Customer View Model

[ENG_CVM_CVM_770902-4_T.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_770902-4_T.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_770902-4_T.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications Continued

English

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

Product Specifications

Product Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

English